



Customised MINO 60 Curve

000191771 - 000191777

GENERAL

ceiling
recessed/surface
white
IP20
RAL 9010^a

LED

4000K
CRI \geq 80
L80/50000h
CRI \geq 80
initial \leq 3 MacAdam

OPTICAL

microprismatic


DIMENSIONS

linear channel 3800 to 6000mm
radius from 522 to 2815 mm
width 60 mm
height 80 mm

ELECTRICAL

DIM DALI
up to 114 lm/W
PC1 220-240 V

^aRAL Palette colours may deviate slightly due to production conditions

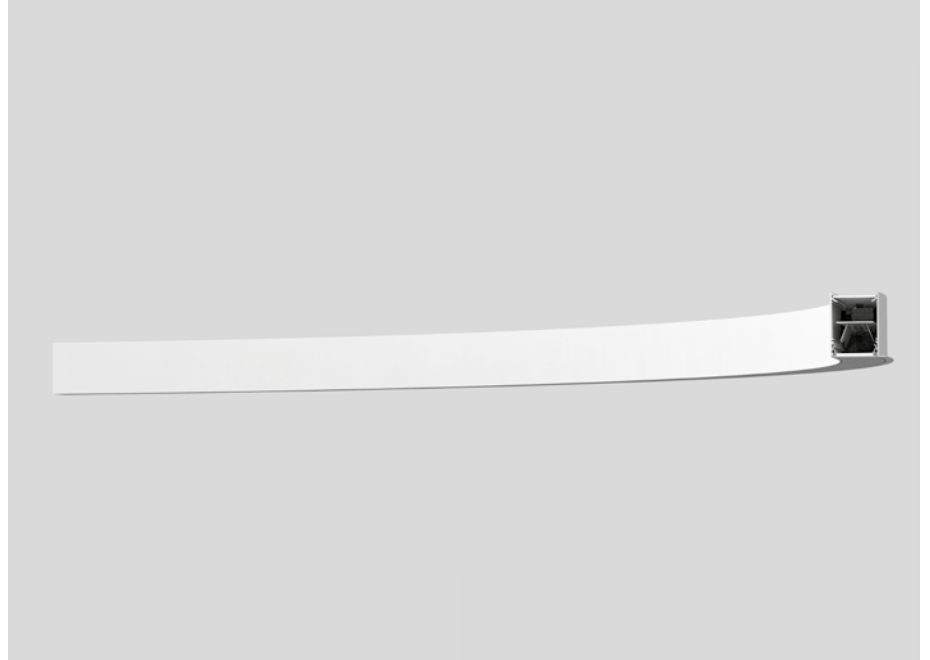

Circular segment from rolled aluminium profile; no visible screws; angular design; seamlessly welded; luminaire with one-sided trim; suitable for ceiling thickness of 8-25 mm; for continuous lighting systems; surface white powder coated; suitable for ceiling mounting; LED light inset consisting of highly reflective coated extruded profile and aluminium PCB for improved thermal management; LED light inset incl. heat sink exchangeable; light colour 4000 K; Binning initial \leq 3 MacAdam; CRI \geq 80; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; micro prismatic PMMA diffuser incl. diffuser film for homogeneous illumination and reduced luminance; degree of protection IP20; PC1 220-240 V; incl. DALI dimmable converter

