


Quickinfo

3000K, 4000K
 CRI ≥ 80, CRI ≥ 90, 3 SDCM
 UGR ≤ 19 / 65° ≤ 1500 cd/m²
 up to 177lm/W
 L90 @ 50000h
 DALI-2
 reflector

Type

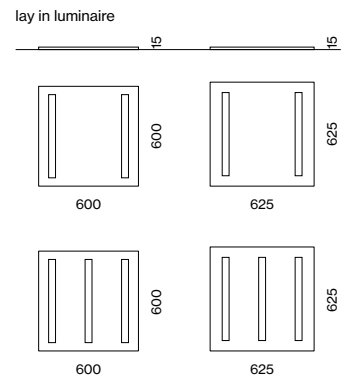

Colour



Light distribution



super wide flood

INTO

recessed

EN Square lay-in luminaire made of sheet steel; optionally for modular ceilings 600 × 600 or 625 × 625 with visible grid system; surface powder coated; optionally two or three linear light insets made of plastic; high quality reflector with micro-faceted, aluminum-vaporised surface; precise radiation characteristic with symmetrical light distribution; exchangeable light insets; incl. converter, suitable for through-wiring; plug and play connection cables between light insets and converter with plug/socket system; energy-efficient LEDs with very good colour rendering

ES Panel empotrable cuadrado de chapa de acero; opcionalmente para falsos techos modulares de 600 × 600 o de 625 × 625 con estructura portante visible; superficie con recubrimiento de pintura en polvo; posibilidad de elegir entre dos o tres insertos luminosos lineales de plástico; reflector de alta calidad con superficie de múltiples facetas revestida con aluminio por vaporización; precisa característica de emisión con distribución de luz simétrica; insertos luminosos recambiables; incluye alimentador apto para cableado continuo; cables prefabricados para la conexión entre los insertos y el alimentador con conectores macho y hembra; LEDs de alta eficiencia que proporcionan una alta reproducción cromática



suitable for grid ceiling



easy mounting



up to 177 lm/W (high efficiency)



DIN EN 12464-1 UGR ≤ 19

Order options

COLOUR TEMPERATURE

3000 K (CRI \geq 90)	0
4000 K (CRI \geq 90)	1
3000 K (CRI \geq 80)	5
4000 K (CRI \geq 80)	6

CONTROL

DALI-2

MATERIAL COLOUR PANEL


traffic white RAL 9016

REFLECTOR COLOUR


- chrome R
- black B

LIGHT OPTIC



super wide flood 74°





INTO 600 recessed




LAY IN LUMINAIRE



SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
20 W (2 reflectors)	3000K 4000K	3040lm 3460lm	064-51100::37  X
29.3 W (3 reflectors)	3000K 4000K	4560lm 5190lm	064-51101::37  X



INTO 625 recessed



LAY IN LUMINAIRE

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
20 W (2 reflectors)	3000K 4000K	3040lm 3460lm	064-51110::37  X
29.3 W (3 reflectors)	3000K 4000K	4560lm 5190lm	064-51111::37  X

