

# SASSO 100 round downlight

trim

048-2700E19W 048-2796317 002-90776



Project / Type

Notes

Count / Date



220-240V

IP20

IP40

X-PERT

X-PERT

General

Ceiling , Recessed

gold , RAL260-M <sup>1</sup>

Mounting set RAL Traffic white

front IP40 , back IP20

2220 lm

LED

colour warm dimming

1800 K - 3000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 100 , R<sub>f</sub>: 89 , R<sub>(f-15)</sub>: 89

MR 0.56

MDER 0.51

Optical

wide flood

beam angle 51°

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

Electrical

DALI-2

system 28.0 W

inset 23.8 W

700 mA

PC2 220-240V

system 79 lm/W<sup>3</sup>

inset 93 lm/W<sup>4</sup>

1 DALI Addr.

Physical

trim

diameter 118 mm

height 75 mm

0.49 kg

Cutout

diameter 108 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 80 mm

Round recessed spotlight in die-cast aluminium; 1 lamp; surface gold; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim RAL Traffic white; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; CWD (Colour Warm Dimming) of 1800K - 3000K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 51° beam; degree of protection from below IP40 (from above IP20); PC2 220-240V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

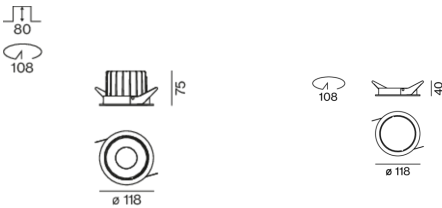

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)  
<sup>4</sup> incl. optical losses

Installation instructions

Lighting calculator

