



MOVE IT 45 system

trimless / surface / suspended


EN Extruded aluminium profile with 45 mm width groove; for trimless installation in plasterboard ceilings (wall or ceiling mounting) with 12.5 mm ceiling thickness; or for wall-/ceiling surface mounting or suspended mounting (cable suspension, height adjustment without tools, incl. black feed); optional with indirect light component for additional accentuation of the ceiling; for lighting systems, 90° angle connectors for flexible system design; node connectors, up to 4 profile connection options; with power track profile for take off of supply voltage and DALI signal; surf. anod. or powder coated; insets can be installed flexibly and without tools by means of magnetic holders + locking; sound absorbing accessories available

DE Aluminiumstrangpressprofil mit 45 mm Fugenbreite; für randlosen Einbau in Gipskartondecken (Wand- oder Deckenmontage) mit 12,5 mm Deckenstärke; oder für Wand-/Deckenanbaumontage oder für abgehängte Montage (Seilabhängung, werkzeuglose Höhenverstellung, inkl. schwarzer Einspeiseleitung); optional mit indirekter Lichtkomponente für zusätzliche Akzentuierung der Decke; für Lichtsysteme, 90° Winkelverbinder für flexiblen Systemaufbau; Knotenverbinder, bis zu 4 Profilanchlussmöglichkeiten; mit Stromschienenprofil für Abnahme von Versorgungsspannung und DALI Signal; Oberfl. elox. bzw. pulverbeschichtet; flexible und werkzeuglose Montage der Einsätze durch Magnethalterung + Verriegelung; schallabsorbierendes Zubehör erhältlich


Quickinfo

3000K
CRI ≥ 90, 2 SDCM
up to 118 lm/W
L80 @ 50 000 h
non DIM, DALI-2


Types




connector



Colours



custom cut on building site



acoustic elements

Order options

CONTROL

| | |
|---------|---|
| non DIM | 1 |
| DALI-2 | 3 |

MATERIAL COLOUR

● jet black RAL 9005





Options on request

CONNECTOR

| | |
|-------------|--|
| T-connector | |
| X-connector | |

INSTALLATION TRACK

acoustic soft ceilings



MOVE IT 45 trimless



INSTALLATION TRACK

L (mm)

| L (mm) | | ORDER CODE |
|-----------|-------------------------------------|-------------|
| 617 | channel | 050-72320-8 |
| 1217 | channel | 050-72340-8 |
| 2417 | channel | 050-72380-8 |
| 3622 | channel | 050-72390-8 |
| cust. cut | channel (non DIM) | E83551-8 |
| cust. cut | channel (DALI-2) | E83521-8 |
| 692x648 | channel corner* 90° | 050-72310-8 |
| 661x661 | channel corner* ceiling to wall 90° | 050-72311-8 |

*incl. electrical connector set

Accessories

END CAPS

TYPE

| | |
|-----------------|-------------|
| end caps (pair) | 050-72300-8 |
|-----------------|-------------|

BLIND COVER

L (mm)

| L (mm) | ORDER CODE |
|------------|-------------|
| 1217 | 050-70340-8 |
| 2417 | 050-70380-8 |
| 3622 | 050-70390-8 |
| custom cut | E83500-8B |

blind cover can be shortened as desired

CONNECTOR SET

TYPE

| TYPE | ORDER CODE |
|------------------------------------|--------------|
| linear connector (non DIM, DALI-2) | 050-20311-30 |
| linear connector flexible | 050-20321-0 |
| mechanical linear connector (pair) | 050-20111-10 |

POWER FEEDER UNIT



TYPE

| TYPE | ORDER CODE |
|-------------------------------------|-------------|
| non DIM 2×2,5mm ² | 050-2020110 |
| DALI-2 2×2,5 + 2×0,5mm ² | 050-2020130 |

cable length 500 mm

Electrical accessories

see following pages



Order options

CONTROL

| | |
|---------|---|
| non DIM | 1 |
| DALI-2 | 3 |

MATERIAL COLOUR

INSTALLATION TRACK

| | |
|---|---|
| ● jet black RAL 9005 | 8 |
| ○ traffic white 9016 / jet black 9005 P | |
| ● gold dust 260-M / jet black 9005 G | G |
| ● special colours* | X |

*inside always in black

MATERIAL COLOUR

NODE CONNECTOR

| | |
|--------------------------|---|
| ○ traffic white RAL 9016 | 7 |
| ● jet black RAL 9005 | 8 |
| ● special colours | X |

MATERIAL COLOUR

NODE LTX/END CAP

| | |
|---|---|
| ● jet black RAL 9005 | 8 |
| ○ traffic white 9016 / jet black 9005 P | P |
| ● special colours | X |

MATERIAL COLOUR

ACCESSORIES

| | |
|--------------------------|---|
| ○ traffic white RAL 9016 | 7 |
| ● jet black RAL 9005 | 8 |

NODE CONNECTOR

MOUNTING TYPE


| | |
|----------------------------|---|
| surface* | 1 |
| 1500 mm cable susp. chrome | 3 |
| 1500 mm cable susp. black | 4 |

*only for L/T/X


MATERIAL COLOUR

CABLE SUSPENSION

| | |
|--------|---|
| chrome | 0 |
| black | 8 |



MOVE IT 45 surface/suspended



INSTALLATION TRACK

| L (mm) | | ORDER CODE |
|-----------|-------------------------------------|------------|
| 620 | channel | 050-73320 |
| 1220 | channel | 050-73340 |
| 2420 | channel | 050-73380 |
| 3625 | channel | 050-73390 |
| cust. cut | channel (non DIM) | E83561 |
| cust. cut | channel (DALI-2) | E83531 |
| 653x609 | channel corner* 90° | 050-73310 |
| 666x666 | channel corner* ceiling to wall 90° | 050-73311 |

*incl. electrical connector set

Accessories

END CAPS

| TYPE | ORDER CODE |
|-----------------|------------|
| end caps (pair) | 050-73300 |

BLIND COVER

| L (mm) | ORDER CODE |
|------------|----------------|
| 1217 | 050-7034008 |
| 2417 | 050-7038008 |
| 3622 | 050-7039008 |
| custom cut | E83500 ···· 8B |

blind cover can be shortened as desired

FLEX NODE CONNECTOR

| TYPE | ORDER CODE |
|--|------------|
| FLEX NODE surface mounted | 050-203333 |
| FLEX NODE surface mounted incl. feeder | 050-202243 |
| FLEX NODE cable suspension 1500 mm | 050-20331 |
| FLEX NODE cable susp. 1500 mm incl. feeder | 050-20222 |
| NODE end cap* incl. electrical connector | 050-733010 |

*order for every node connection (channel to node) 1 end cap

CONNECTOR SET

| TYPE | ORDER CODE |
|---|-------------|
| mechanical linear conn. incl. 1500 mm cable susp. | 050-201131 |
| mechanical linear connector surface | 050-2011410 |
| mechanical & electrical linear connector | 050-2031230 |





POWER FEEDER UNIT

| TYPE | L (mm) | ORDER CODE |
|--------------------------------------|--------|-------------|
| non DIM 2×2,5 mm ² | 2000 | 050-2022110 |
| DALI-2 2×2,5 + 2×0,5 mm ² | 2000 | 050-2022130 |
| non DIM 2×2,5 mm ² | 4000 | 050-2024110 |
| DALI-2 2×2,5 + 2×0,5 mm ² | 4000 | 050-2024130 |

CEILING FASTENER / CABLE SUSPENSION / CANOPY

| TYPE | L (mm) | ORDER CODE |
|-------------------|--------|------------|
| ceiling fastener | 67 | 050-204121 |
| cable suspension* | 1500 | 005-215211 |
| canopy | | 005-231171 |

*use every 1200 mm



Electrical accessories

see following pages

Acoustic elements

see following pages

Order options

COLOUR TEMPERATURE

3000K

CONTROL

non DIM 1
DALI-2 3

MATERIAL COLOUR INSTALLATION TRACK

● jet black RAL 9005 8
● traffic white 9016 / jet black 9005 P
● gold dust 260-M / jet black 9005 G
● special colours* X

*inside always in black

MATERIAL COLOUR NODE CONNECTOR

○ traffic white RAL 9016 7
● jet black RAL 9005 8
● special colours X

MATERIAL COLOUR NODE LTX/END CAP

● jet black RAL 9005 8
● traffic white 9016 / jet black 9005 P
● special colours X

MATERIAL COLOUR ACCESSORIES

○ traffic white RAL 9016 7
● jet black RAL 9005 8

NODE CONNECTOR MOUNTING TYPE

surface* 1
1500 mm cable susp. chrome 3
1500 mm cable susp. black 4

*only for L/T/X

MATERIAL COLOUR CABLE SUSPENSION

chrome 0
black 8

Options on request


COLOUR RENDERING INDEX

CRI ≥ 98 XPECTRUM

COLOUR TEMPERATURE

2700 K
4000 K
tunable white 2700–6500 K*

*DALI-2 DT8



MOVE IT 45 suspended indirect



INSTALLATION TRACK INDIRECT

| L (mm) | SYSTEM POWER | LUMINOUS FLUX | ORDER CODE |
|-----------------|--------------|---------------|-------------------|
| 620 | 6.2W | 648lm | 0 5 0 - 7 4 3 2 5 |
| 1220 | 15.3W | 1810lm | 0 5 0 - 7 4 3 4 5 |
| 2420 | 33W | 3890lm | 0 5 0 - 7 4 3 8 5 |
| 3625 | 51W | 6000lm | 0 5 0 - 7 4 3 9 5 |
| 653x609 corner* | 13.1W | 1550lm | 0 5 0 - 7 4 3 1 0 |

incl. chrome cable suspension for L=1220/2420/3625 mm
no custom cut on building side; *incl. electrical connector set

Accessories

END CAPS

| TYPE | ORDER CODE |
|-----------------|-------------------|
| end caps (pair) | 0 5 0 - 7 3 3 0 0 |



BLIND COVER


| L (mm) | ORDER CODE |
|------------|-----------------------|
| 1217 | 0 5 0 - 7 0 3 4 0 0 8 |
| 2417 | 0 5 0 - 7 0 3 8 0 0 8 |
| 3622 | 0 5 0 - 7 0 3 9 0 0 8 |
| custom cut | E 8 3 5 0 0 ···· 8 B |



blind cover can be shortened as desired

FLEX NODE CONNECTOR


| TYPE | ORDER CODE |
|--|---------------------|
| FLEX NODE cable suspension 1500 mm | 0 5 0 - 2 0 3 3 1 |
| FLEX NODE cable susp. 1500 mm incl. feeder | 0 5 0 - 2 0 2 2 2 |
| NODE end cap* incl. electrical connector | 0 5 0 - 7 3 3 0 1 0 |



*order for every node connection (channel to node) 1 end cap


CONNECTOR SET

| TYPE | ORDER CODE |
|---|-----------------------|
| mechanical linear conn. incl. 1500 mm cable susp. | 0 5 0 - 2 0 1 1 3 1 |
| mechanical & electrical linear connector | 0 5 0 - 2 0 3 1 2 3 0 |




POWER FEEDER UNIT

| TYPE | L (mm) | ORDER CODE |
|--|--------|-----------------------|
| non DIM 2 × 2,5 mm ² | 2000 | 0 5 0 - 2 0 2 2 1 1 0 |
| DALI-2 2 × 2,5 + 2 × 0,5 mm ² | 2000 | 0 5 0 - 2 0 2 2 1 3 0 |
| non DIM 2 × 2,5 mm ² | 4000 | 0 5 0 - 2 0 2 4 1 1 0 |
| DALI-2 2 × 2,5 + 2 × 0,5 mm ² | 4000 | 0 5 0 - 2 0 2 4 1 3 0 |



CABLE SUSPENSION / CANOPY

| TYPE | L (mm) | ORDER CODE |
|-------------------|--------|---------------------|
| cable suspension* | 1500 | 0 0 5 - 2 1 5 2 1 1 |
| canopy | | 0 0 5 - 2 3 1 1 7 1 |



*use every 1200 mm

Electrical accessories

see following pages

Acoustic elements

see following pages

LUMINOUS FLUX value calculated for 3000 K, CRI ≥ 90, colour white/black


Order options

CONTROL ▾

| | |
|---------|---|
| non DIM | 1 |
| DALI-2 | 3 |

MATERIAL COLOUR ▾

| | |
|--------------------------|---|
| ○ traffic white RAL 9016 | 7 |
| ● jet black RAL 9005 | 8 |




Electrical accessories

POWER SUPPLY INTRACK supply 220-240 V AC, 48 V, 50-60 Hz

| TYPE | EFFICIENCY | MOUNTING | L-W-H (mm) | ORDER CODE |
|----------------------|------------|----------|------------|-------------|
| 150 W □ PC II η 92 % | | intrack | 453-43-48 | 050-2071238 |
| 250 W □ PC II η 93 % | | intrack | 453-43-48 | 050-2071338 |

incl. feeder cable 2000 mm; ENEC approved; DALI-2 SELV device integrated


POWER SUPPLY SURFACE supply 220-240 V AC, 48 V, 50-60 Hz



| TYPE | EFFICIENCY | MOUNTING | L-W-H (mm) | ORDER CODE |
|----------------------|------------|----------|------------|--|
| 60 W □ PC II η 88 % | | surface | 305-144-54 | 050-20551 ▾ |
| 100 W □ PC II η 92 % | | surface | 455-104-40 | 050-20554 ▾ |
| 150 W □ PC II η 92 % | | surface | 455-104-40 | 050-20552 ▾ |
| 250 W □ PC II η 93 % | | surface | 455-104-40 | 050-20555 ▾ |
| 320 W ⊕ PC I η 94 % | | surface | 305-144-54 | 050-20553 ▾ |

ENEC approved; DALI-2 SELV device integrated

POWER SUPPLY EXTERNAL supply 220-240 V AC, 48 V, 50-60 Hz



| TYPE | EFFICIENCY | MOUNTING | L-W-H (mm) | ORDER CODE |
|----------------------|------------|----------|------------|------------|
| 60 W □ PC II η 88 % | | external | 163-43-32 | 002-62133 |
| 100 W □ PC II η 92 % | | external | 350-30-18 | 002-62134 |
| 150 W □ PC II η 92 % | | external | 350-30-18 | 002-62135 |
| 250 W □ PC II η 93 % | | external | 400-40-22 | 002-62139 |
| 320 W ⊕ PC I η 94 % | | external | 252-90-44 | 002-60320 |

ENEC approved


DIN RAIL POWER SUPPLY PRO 48V

220-240 V | 50-60 Hz | ⊕ PC I | MTBF @ 55° ambient temperature cascable max. 5 devices (240 W) or 3 devices (480 W)



| TYPE | EFFICIENCY / MTBF | W-H-D (mm) | ORDER CODE |
|---------------------------|-------------------|-------------|-------------|
| 240 W η 92 % / > 400.000h | | 60-125-100 | 005-6220110 |
| 480 W η 93 % / > 350.000h | | 120-125-100 | 005-6220210 |

DALI-2 SELV DEVICE



| TYPE | L-W-H (mm) | ORDER CODE |
|--------------|------------|-------------|
| control unit | 213-37-25 | 050-2061130 |


necessary to create DALI-2 SELV signal; DALI power supply integrated

DALI-2 SENSOR




| TYPE | L-W-H (mm) | ORDER CODE |
|--|------------|-------------|
| ESSENTIAL sensor (brightness & presence) | 43-43-48 | 050-2063378 |
| SENSE sensor (brightness, presence, temperature, sound pressure, humidity, CO ₂) | 43-43-48 | 050-2063278 |

WIRELESS TO DALI-2 CONTROL DEVICE



| TYPE | L-W-H (mm) | ORDER CODE |
|---------|------------|-------------|
| Casambi | 111-25-45 | 050-2065230 |


WIRELESS TO DALI-2 REPEATER



| TYPE | L-W-H (mm) | ORDER CODE |
|---------|------------|-------------|
| Casambi | 111-25-45 | 050-2066230 |

DALI-2 SELV device required

MIDDLE FEED



| TYPE | ORDER CODE |
|--------------------------------------|-------------|
| DALI-2 2×2,5 + 2×0,5 mm ² | 050-2038130 |

cable length 2000 mm





LIGHT INSET 45

linear inset 45

Quickinfo




3000 K, 4000 K, TW
 CRI ≥ 90, 3 SDCM
 DALI-2

L85 @ 50 000 h
 opal/ opal jut-out up to 99 lm/W
 microprism. (≤19) up to 77 lm/W
 microprism. (≤22) up to 78 lm/W

L80 @ 50 000 h
 UGR ≤ 19 / 65° ≤ 1500 cd/m²
 L1 up to 106 lm/W
 L2 up to 97 lm/W
 L4 up to 104 lm/W
 L6 up to 90 lm/W

L90 @ 50 000 h
 UGR ≤ 19 / 65° ≤ 1500 cd/m²
 L10 office up to 102 lm/W
 L24 office up to 120 lm/W


Types




Colour



Light distributions



tunable white
 2700–5000 K



CRI ≥ 98
 XPECTRUM

Order options

COLOUR TEMPERATURE ☐☐

| | |
|---------------------------|---|
| 3000K | 5 |
| 4000K | 6 |
| tunable white 2700-5000K* | D |

*DALI-2 DT8

CONTROL

DALI-2

MATERIAL COLOUR

● jet black RAL 9005


Options on request

COLOUR RENDERING INDEX


CRI ≥ 98 XPECTRUM

CONTROL

Zigbee 3.0





LIGHT INSET 45




OPAL HIGH PERFORMANCE

| INSET POWER | COLOUR TEMP. | LUM. FLUX | L (mm) | ORDER CODE |
|-------------|--------------|-----------|--------|------------------------|
| 14.8W | 3000K | 1100lm | 605 | 0 5 0 - 3 2 1 2 ☐☐ 38H |
| | 4000K | 1210lm | | |
| 29.6W | 3000K | 2190lm | 1205 | 0 5 0 - 3 2 1 4 ☐☐ 38H |
| | 4000K | 2420lm | | |




OPAL JUT-OUT

| INSET POWER | COLOUR TEMP. | LUM. FLUX | L (mm) | ORDER CODE |
|-------------|--------------|-----------|--------|------------------------|
| 14.8W | 3000K | 1160lm | 605 | 0 5 0 - 3 2 1 2 ☐☐ 38J |
| | 4000K | 1270lm | | |
| 29.6W | 3000K | 2310lm | 1205 | 0 5 0 - 3 2 1 4 ☐☐ 38J |
| | 4000K | 2550lm | | |



MICROPRISMATIC UGR ≤ 19

| INSET POWER | COLOUR TEMP. | LUM. FLUX | L (mm) | ORDER CODE |
|-------------|--------------|-----------|--------|------------------------|
| 9.2W | 3000K | 636lm | 605 | 0 5 0 - 3 2 1 2 ☐☐ 38P |
| | 4000K | 701lm | | |
| 18.3W | 3000K | 1270lm | 1205 | 0 5 0 - 3 2 1 4 ☐☐ 38P |
| | 4000K | 400lm | | |



MICROPRISMATIC UGR ≤ 22

| INSET POWER | COLOUR TEMP. | LUM. FLUX | L (mm) | ORDER CODE |
|-------------|--------------|-----------|--------|------------------------|
| 23W | 3000K | 1640lm | 605 | 0 5 0 - 3 2 4 2 ☐☐ 38P |
| | 4000K | 1750lm | | |
| 45W | 3000K | 3280lm | 1205 | 0 5 0 - 3 2 4 4 ☐☐ 38P |
| | 4000K | 3500lm | | |

INSET POWER in watts is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI ≥ 90, colour black

Order options

COLOUR TEMPERATURE

| | |
|----------------------------|---|
| 3000 K | 5 |
| 4000 K | 6 |
| tunable white 2700–5000 K* | D |

*DALI-2 DT8

CONTROL

DALI-2

LIGHT OPTIC

| | |
|--------------------------|---|
| medium square (UGR ≤ 10) | E |
| flood square (UGR ≤ 19) | F |

LIGHT OPTIC COLOUR

| | |
|------------------|---|
| chrome reflector | 0 |
| black reflector* | B |

*not available for spot round, narrow medium round and wallwasher

MATERIAL COLOUR

● jet black RAL 9005

Options on request


LIGHT OPTIC

| |
|--------------------------|
| spot round |
| narrow medium round |
| medium round (UGR ≤ 19) |
| medium square (UGR ≤ 10) |
| flood round (UGR ≤ 19) |
| flood square (UGR ≤ 19) |
| wide flood round |
| wide flood square |
| rectangular |
| wallwasher |
| wallwasher floor |

LIGHT OPTIC COLOUR

gold reflector

Planning information





The icons of the light optics are shown in the reflected ceiling plan (RCP) view.

INSET POWER in watts is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI ≥ 90, colour black, reflector chrome



L1 LIGHT INSET




FLOOR

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-----------------|
| 3.4 W | 3000 K | up to 338 lm | 090-9L1::3▲B■01 |
| | 4000 K | up to 361 lm | |

choose one light optic ▲ from the options on the left depending on your room needs



L2 LIGHT INSET



WALL

2 × wallwasher

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-----------------|
| 6.9 W | 3000 K | 590 lm | 090-9L2::3AB001 |
| | 4000 K | 633 lm | |



WALL FLOOR

2 × wallwasher floor

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-----------------|
| 6.9 W | 3000 K | 620 lm | 090-9L2::3WB■01 |
| | 4000 K | 662 lm | |





CORRIDOR

2 × rectangular

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-----------------|
| 6.9 W | 3000 K | 624 lm | 090-9L2::3RB■01 |
| | 4000 K | 667 lm | |



L4 LIGHT INSET



FLOOR/CORRIDOR

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-----------------|
| 14 W | 3000 K | up to 1350 lm | 090-9L4::3▲B■01 |
| | 4000 K | up to 1450 lm | |

choose one light optic ▲ from the options on the left depending on your room needs



WALL

4 × wallwasher

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-----------------|
| 14 W | 3000 K | 1180 lm | 090-9L4::3AB001 |
| | 4000 K | 1270 lm | |



WALL

2 × wallwasher 180° + 2 × wallwasher

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-----------------|
| 14 W | 3000 K | 1180 lm | 090-9L4::3AB002 |
| | 4000 K | 1270 lm | |



WALL FLOOR

4 × wallwasher floor

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-----------------|
| 14 W | 3000 K | 1240 lm | 090-9L4::3WB■01 |
| | 4000 K | 1320 lm | |



WALL FLOOR

2 × wallwasher floor 180° + 2 × wallwasher floor

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-----------------|
| 14 W | 3000 K | 1240 lm | 090-9L4::3WB■02 |
| | 4000 K | 1320 lm | |

Order options

| | |
|---------------------------|---|
| COLOUR TEMPERATURE | |
| 3000K | 5 |
| 4000K | 6 |
| tunable white 2700–6500K* | |

| |
|----------------|
| CONTROL |
| DALI-2 |

| | |
|---------------------------|---|
| LIGHT OPTIC COLOUR | |
| chrome reflector | 0 |
| black reflector* | B |

*not available for spot round, narrow medium round and wallwasher

| |
|------------------------|
| MATERIAL COLOUR |
| ● jet black RAL 9005 |

Options on request



| |
|-------------------------------|
| COLOUR RENDERING INDEX |
| CRI ≥ 98 XPECTRUM* |

*only for L24 light inset

| |
|--------------------------|
| LIGHT OPTIC |
| spot round |
| narrow medium round |
| medium round (UGR ≤ 19) |
| medium square (UGR ≤ 10) |
| flood round (UGR ≤ 19) |
| flood square (UGR ≤ 19) |
| wide flood round |
| wide flood square |
| rectangular |
| wallwasher |
| wallwasher floor |

| |
|---------------------------|
| LIGHT OPTIC COLOUR |
| gold reflector |

not available for L24 light inset





L6 LIGHT INSET



WALL

6 × wallwasher

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|---------------|---------------|-----------------|
| 21W | 3000K | 1780lm | 090-9L6::3AB001 |
| 15.1W | 4000K | 1900lm | |
| | TW 2700–5000K | 1120lm | 090-9L6D3AB001 |





L10 LIGHT INSET



OFFICE UGR ≤ 19

10 × medium square

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|---------------|---------------|---------------|
| 30W | 3000K | 2840lm | 050-3211::38R |
| 22.2W | 4000K | 3060lm | |
| | TW 2700–6500K | 2790lm | 050-3211D38R |



L24 LIGHT INSET



OFFICE UGR ≤ 19

24 × medium square

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|---------------|---------------|---------------|
| 21W | 3000K | 2350lm | 050-3213::38R |
| 20.2W | 4000K | 2510lm | |
| | TW 2700–6500K | 2800lm | 050-3213D38R |

INSET POWER in watts is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI ≥ 90, colour black, reflector chrome



JUST 45/55

spotlight inset 45

Quickinfo

2700 K, 3000 K, 4000 K, CWD, TW
CRI ≥ 90, 2 SDCM

non DIM, DALI-2


L80 @ 50 000 h
JUST 45 up to 72lm/W

L90 @ 50 000 h
JUST 55 up to 88lm/W



Types




Colours



Light distributions



ARY rod




ARY shade



TULA



PAL



**TW 1800–3000K
or 2700–6500K**



CWD 2000–3000K

Order options

COLOUR TEMPERATURE

| | |
|-------------------------------|---|
| 2700 K | 4 |
| 3000 K | 5 |
| 4000 K | 6 |
| colour warm dim. 2000–3000 K* | |
| tunable white 1800–3000 K** | |
| tunable white 2700–6500 K** | |

*DALI-2 **DALI-2 DT8

CONTROL

| | |
|---------|---|
| non DIM | 1 |
| DALI-2 | 3 |

MATERIAL COLOUR



| | |
|---|---|
| <input type="radio"/> traffic white RAL 9016 | 7 |
| <input checked="" type="radio"/> jet black RAL 9005 | 8 |
| <input type="radio"/> special colours | X |

BEAM ANGLE JUST 45

| | |
|------------|---|
| medium 23° | M |
| flood 44° | F |

BEAM ANGLE JUST 55

| | |
|------------|---|
| spot 16° | S |
| medium 28° | M |
| flood 37° | F |



JUST 45



SPOTLIGHT

| INSET POWER | LUMINOUS FLUX | ORDER CODE |
|--------------------|---------------|------------------|
| 6.1W super spot 8° | 297lm | 050-013131:3:3▲V |
| 11W | 788lm | 050-013131:3:3▲▲ |
| 12W CWD 2000–3000K | 430lm | 050-0131E3:3▲▲ |
| 11W TW 1800–3000K | 555lm | 050-0131L3:3▲▲ |
| 11W TW 2700–6500K | 683lm | 050-0131D3:3▲▲ |

JUST 55



SPOTLIGHT

| INSET POWER | LUMINOUS FLUX | ORDER CODE |
|-------------|---------------|-----------------|
| 16.4W | 1430lm | 050-01433:3:3▲▲ |
| 25.4W | 2010lm | 050-01423:3:3▲▲ |

Optical accessories

HONEYCOMB LOUVER

| TYPE | Ø-H (mm) | ORDER CODE |
|---------|----------|-------------|
| JUST 45 | 42:3 | 007-1965188 |
| JUST 55 | 50:3 | 007-1965598 |

INSET POWER in watts is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for 3000K, CRI ≥ 90, colour white, lens flood 2700K -5%, 4000K +5%



reddot award 2019
winner




PIVOT

graphic light inset 25/25S/45

Quickinfo

2700 K, 3000 K, TW
CRI \geq 90, 3 SDCM
up to 123 lm/W
L90 @ 50 000 h
non DIM, DALI-2

Types




Colour




Light distribution



opal



tunable white
1800–4000K



CRI \geq 98
XPECTRUM

Order options

COLOUR TEMPERATURE

| | |
|----------------------------|---|
| 2700 K | 4 |
| 3000 K | 5 |
| tunable white 1800–4000 K* | L |

*DALI-2 DT8

CONTROL

| | |
|---------|---|
| non DIM | 1 |
| DALI-2 | 3 |

MATERIAL COLOUR


● jet black RAL 9005

Options on request


COLOUR RENDERING INDEX
CRI ≥ 98 XPECTRUM

COLOUR TEMPERATURE
4000 K

MATERIAL COLOUR
○ traffic white RAL 9016





LIGHT INSET 25S




PIVOT

| INS. POWER | COLOUR TEMP. | LUM. FLUX | L (mm) | ORDER CODE |
|------------|--------------|-----------|--------|------------------------|
| 10.6 W | 2700 K | 1190 lm | 610 | 0 5 0 - 1 3 1 2 :: 8 0 |
| | 3000 K | 1260 lm | | |
| 15.9 W | 2700 K | 1780 lm | 910 | 0 5 0 - 1 3 1 3 :: 8 0 |
| | 3000 K | 1890 lm | | |
| 21.2 W | 2700 K | 2380 lm | 1210 | 0 5 0 - 1 3 1 4 :: 8 0 |
| | 3000 K | 2530 lm | | |
| 26.4 W | 2700 K | 2970 lm | 1510 | 0 5 0 - 1 3 1 5 :: 8 0 |
| | 3000 K | 3160 lm | | |
| 32 W | 2700 K | 3570 lm | 1810 | 0 5 0 - 1 3 1 6 :: 8 0 |
| | 3000 K | 3790 lm | | |

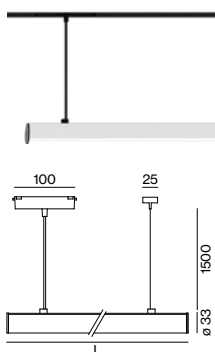


PIVOT SUSPENDED

| INS. POWER | COLOUR TEMP. | LUM. FLUX | L (mm) | ORDER CODE |
|------------|--------------|-----------|--------|------------------------|
| 10.6 W | 2700 K | 1190 lm | 610 | 0 5 0 - 0 3 2 2 :: 8 0 |
| | 3000 K | 1260 lm | | |
| 15.9 W | 2700 K | 1780 lm | 910 | 0 5 0 - 0 3 2 3 :: 8 0 |
| | 3000 K | 1890 lm | | |
| 21.2 W | 2700 K | 2380 lm | 1210 | 0 5 0 - 0 3 2 4 :: 8 0 |
| | 3000 K | 2530 lm | | |
| 26.4 W | 2700 K | 2970 lm | 1510 | 0 5 0 - 0 3 2 5 :: 8 0 |
| | 3000 K | 3160 lm | | |





LIGHT INSET 25/45



PIVOT


| INS. POWER | COLOUR TEMP. | LUM. FLUX | L (mm) | ORDER CODE |
|------------|--------------|-----------|--------|------------------------|
| 10.6 W | 2700 K | 1190 lm | 610 | 0 5 0 - 0 3 1 2 :: 8 0 |
| | 3000 K | 1260 lm | | |
| 15.9 W | 2700 K | 1780 lm | 910 | 0 5 0 - 0 3 1 3 :: 8 0 |
| | 3000 K | 1890 lm | | |
| 21.2 W | 2700 K | 2380 lm | 1210 | 0 5 0 - 0 3 1 4 :: 8 0 |
| | 3000 K | 2530 lm | | |
| 26.4 W | 2700 K | 2970 lm | 1510 | 0 5 0 - 0 3 1 5 :: 8 0 |
| | 3000 K | 3160 lm | | |
| 32 W | 2700 K | 3570 lm | 1810 | 0 5 0 - 0 3 1 6 :: 8 0 |
| | 3000 K | 3790 lm | | |

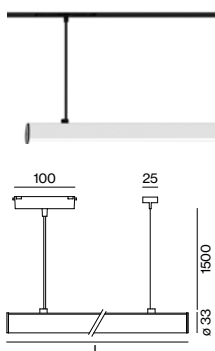

PIVOT SUSPENDED

| INS. POWER | COLOUR TEMP. | LUM. FLUX | L (mm) | ORDER CODE |
|------------|--------------|-----------|--------|------------------------|
| 10.6 W | 2700 K | 1190 lm | 610 | 0 5 0 - 0 3 2 2 :: 8 0 |
| | 3000 K | 1260 lm | | |
| 15.9 W | 2700 K | 1780 lm | 910 | 0 5 0 - 0 3 2 3 :: 8 0 |
| | 3000 K | 1890 lm | | |
| 21.2 W | 2700 K | 2380 lm | 1210 | 0 5 0 - 0 3 2 4 :: 8 0 |
| | 3000 K | 2530 lm | | |
| 26.4 W | 2700 K | 2970 lm | 1510 | 0 5 0 - 0 3 2 5 :: 8 0 |
| | 3000 K | 3160 lm | | |


LUMINOUS FLUX value calculated for CRI ≥ 90, colour black

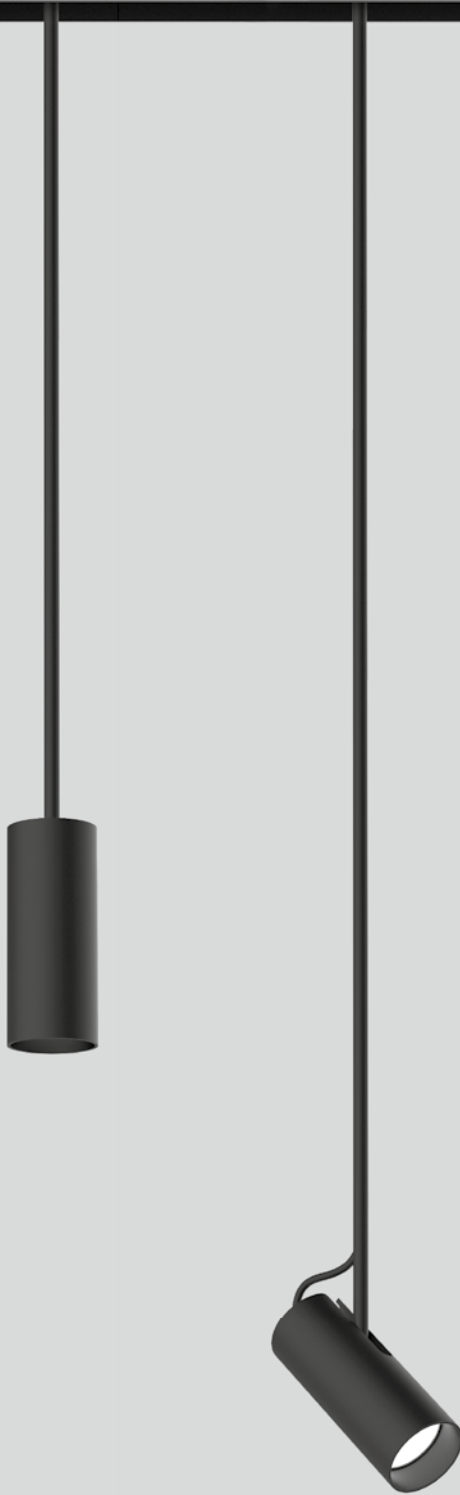

Quickinfo

2700 K, 3000 K, 4000 K, TW
 CRI ≥ 90, 3 SDCM
 up to 84 lm/W
 L90 @ 50 000h
 non DIM, DALI-2

Types




Colours



Light distributions



ARY rod
 decorative inset 25/25S/45

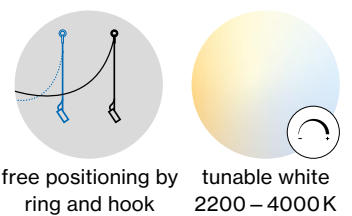

Order options

CABLE SUSPENSION

| | |
|--------------------|---|
| 1500 mm | 5 |
| 2000 mm with hook* | 6 |

*one ring included

COLOUR TEMPERATURE

| | |
|----------------------------|---|
| 2700 K | 4 |
| 3000 K | 5 |
| 4000 K | 6 |
| tunable white 2200–4000 K* | |

*DALI-2 DT8

CONTROL

| | |
|---------|---|
| non DIM | 1 |
| DALI-2 | 3 |

MATERIAL COLOUR


| | |
|--------------------------|---|
| ○ traffic white RAL 9016 | 7 |
| ● jet black RAL 9005 | 8 |
| ● special colours | X |

ACCESSORY COLOUR

| | |
|--------------------------|---|
| ○ traffic white RAL 9016 | 7 |
| ● jet black RAL 9005 | 8 |

BEAM ANGLE

| | |
|------------|---|
| medium 25° | M |
| flood 44° | F |



ARY rod



DOWNLIGHT


| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-----------------|
| 14 W | 2700 K | 1050 lm | 050-0 3 2 1 |
| | 3000 K | 1100 lm | |
| | 4000 K | 1180 lm | |
| 5.4 W TW | 2200–4000 K | 284 lm | 050-0 3 2 1 D 3 |

ARY rod adjustable



SPOTLIGHT


| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-----------------|
| 14 W | 2700 K | 1050 lm | 050-0 3 3 1 |
| | 3000 K | 1100 lm | |
| | 4000 K | 1180 lm | |
| 5.4 W TW | 2200–4000 K | 284 lm | 050-0 3 3 1 D 3 |



Mounting accessories

RING track mounted

| TYPE | Ø-H (mm) | ORDER CODE |
|---------------|----------|------------|
| MOVE IT 25 S | 50-70 | 050-151011 |
| MOVE IT 25/45 | 50-91 | 050-051011 |



RING ceiling mounted

| TYPE | Ø-H (mm) | ORDER CODE |
|-------------------|----------|------------|
| MOVE IT 25/25S/45 | 50-88 | 050-051021 |






Quickinfo

2700 K, 3000 K, 4000 K, TW
 CRI ≥ 90, 3 SDCM
 up to 84 lm/W
 L90 @ 50 000h
 non DIM, DALI-2

Types



Colours



Light distributions




reddot winner 2020




ARY cable

decorative inset 25/25S/45



free positioning by ring and hook



tunable white 2200 – 4000K

Order options

CABLE SUSPENSION

| | |
|-------------------|---|
| 1500mm | 5 |
| 2000mm with hook* | 6 |

*one ring included

COLOUR TEMPERATURE

| | |
|----------------------------|---|
| 2700 K | 4 |
| 3000 K | 5 |
| 4000 K | 6 |
| tunable white 2200–4000 K* | |

*DALI-2 DT8

CONTROL

| | |
|---------|---|
| non DIM | 1 |
| DALI-2 | 3 |

MATERIAL COLOUR

| | |
|--------------------------|---|
| ○ traffic white RAL 9016 | 7 |
| ● jet black RAL 9005 | 8 |
| ●●● special colours | X |

ACCESSORY COLOUR


| | |
|--------------------------|---|
| ○ traffic white RAL 9016 | 7 |
| ● jet black RAL 9005 | 8 |

BEAM ANGLE

| | |
|------------|---|
| medium 25° | M |
| flood 44° | F |

SHADE COLOUR

| | |
|---------------------------------|---|
| ● velvet beige RAL 085 8010 | C |
| ● madeira brown RAL 050 40 40 | T |
| ● kingfisher grey RAL 230 60 10 | L |
| ● woodpecker olive RAL 10 50 20 | G |
| ○ signal white RAL 9003 | W |
| ● signal black RAL 9004 | B |



ARY cable



DOWNLIGHT

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|---------------------|
| 14 W | 2700 K | 1050 lm | 0 5 0 - 0 5 1 1 1 |
| | 3000 K | 1100 lm | |
| | 4000 K | 1180 lm | |
| 5.4 W TW | 2200–4000 K | 284 lm | 0 5 0 - 0 5 1 1 D 3 |

Mounting accessories

RING track mounted

| TYPE | Ø-H (mm) | ORDER CODE |
|---------------|----------|---------------------|
| MOVE IT 25 S | 50-70 | 0 5 0 - 1 5 1 0 1 1 |
| MOVE IT 25/45 | 50-91 | 0 5 0 - 0 5 1 0 1 1 |

RING ceiling mounted


| TYPE | Ø-H (mm) | ORDER CODE |
|-------------------|----------|---------------------|
| MOVE IT 25/25S/45 | 50-88 | 0 5 0 - 0 5 1 0 2 1 |

Optical accessories

SHADE

| TYPE | Ø-H (mm) | ORDER CODE |
|----------|----------|---------------------|
| cone 300 | 300-188 | 0 4 9 - 5 9 3 3 1 1 |
| cone 400 | 400-253 | 0 4 9 - 5 9 3 4 1 1 |
| cone 500 | 500-318 | 0 4 9 - 5 9 3 5 1 1 |


only available for ARY cable

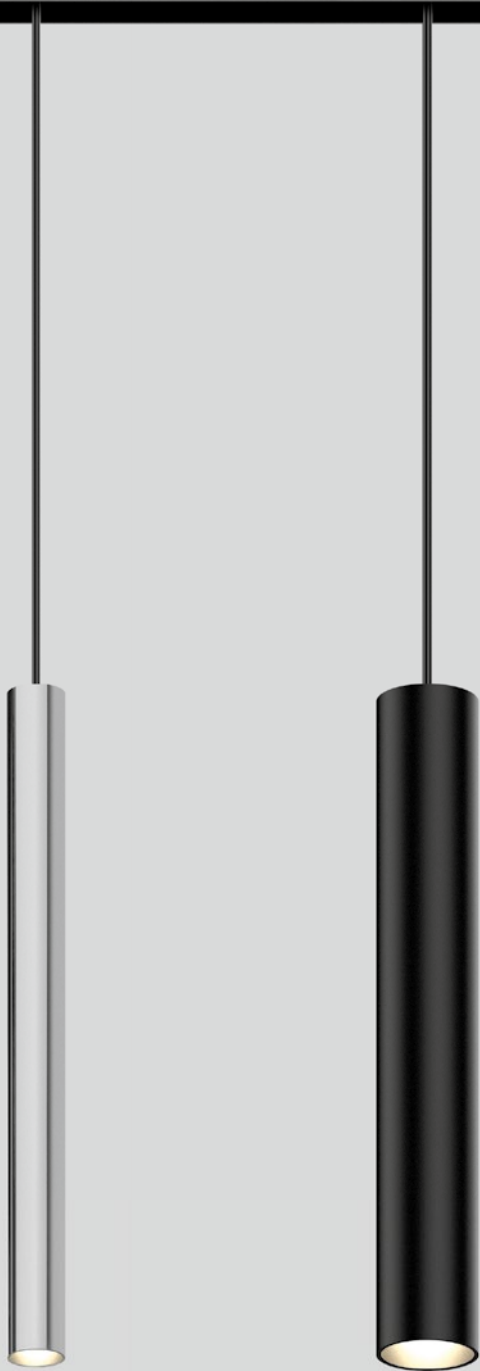

Quickinfo

2700 K, 3000 K, TW
 CRI ≥ 90, 3 SDCM
 up to 75 lm/W
 L80 @ 50 000 h
 non DIM, DALI-2

Types

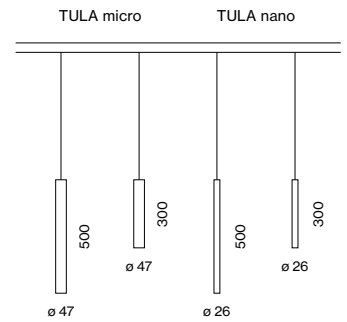

Colours




Light distributions




TULA

decorative inset 25/25S/45



free positioning by
ring and hook



tunable white
2200 – 4000 K

Order options

| HOUSING HEIGHT | L |
|----------------|---|
| 300 mm | 0 |
| 500 mm | 1 |

| CABLE SUSPENSION | ☞ |
|--------------------|---|
| 1500 mm | 7 |
| 2000 mm with hook* | 8 |

*one ring included

| COLOUR TEMPERATURE | ☼☼ |
|------------------------------|----|
| 2700 K | 4 |
| 3000 K | 5 |
| tunable white 2200 – 4000 K* | |

*DALI-2 DT8

| CONTROL | ◆ |
|---------|---|
| non DIM | 1 |
| DALI-2 | 3 |


| MATERIAL COLOUR | ☑ |
|--------------------------|---|
| ☉ chrome | 4 |
| ○ traffic white RAL 9016 | 7 |
| ● jet black RAL 9005 | 8 |
| 🌈 special colours | X |

| ACCESSORY COLOUR | ■ |
|--------------------------|---|
| ○ traffic white RAL 9016 | 7 |
| ● jet black RAL 9005 | 8 |

| BEAM ANGLE | ▲ |
|------------|---|
| medium 25° | M |
| flood 44° | F |

Options on request

| COLOUR TEMPERATURE |
|--------------------|
| 4000 K |




TULA nano suspended




DOWNLIGHT

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-------------------|
| 11W | 2700K | 642lm | 050-L ☞ 11 ☼☼ ◆ ▲ |
| | 3000K | 688lm | |



TULA micro suspended




DOWNLIGHT

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|--------------------|
| 14W | 2700K | 998lm | 050-L ☞ 15 ☼☼ ◆ ▲ |
| | 3000K | 1048lm | |
| 5.4W | 2200 – 4000K | 254lm | 050-L ☞ 15 D 3 ◆ ▲ |

Mounting accessories

RING track mounted




| TYPE | Ø-H (mm) | ORDER CODE |
|---------------|----------|--------------|
| MOVE IT 25 S | 50-70 | 050-151011 ■ |
| MOVE IT 25/45 | 50-91 | 050-051011 ■ |

RING ceiling mounted




| TYPE | Ø-H (mm) | ORDER CODE |
|-------------------|----------|--------------|
| MOVE IT 25/25S/45 | 50-88 | 050-051021 ■ |

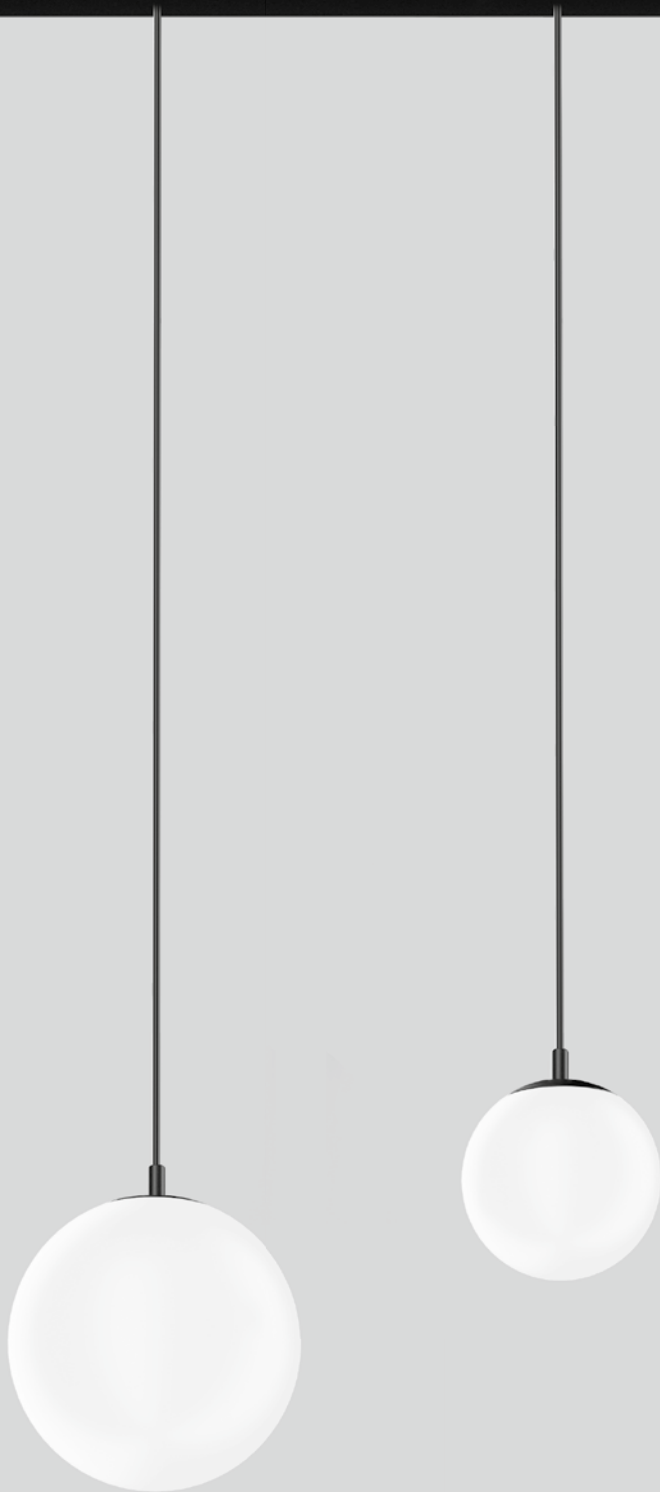

Quickinfo

2700 K, 3000 K
CRI \geq 90, 3 SDCM
up to 55 lm/W
L80 @ 50 000 h
non DIM, DALI-2

Types



Colours



Light distribution



PAL

decorative inset 25/25S/45

Order options

CABLE SUSPENSION

| | |
|--------------------|---|
| 1500 mm | 5 |
| 2000 mm with hook* | 6 |

*one ring included

COLOUR TEMPERATURE

| | |
|--------|---|
| 2700 K | 4 |
| 3000 K | 5 |

CONTROL


| | |
|---------|---|
| non DIM | 1 |
| DALI-2 | 3 |

MATERIAL COLOUR


| | |
|-----------------------|---|
| ○ pure white RAL 9010 | 7 |
| ● jet black RAL 9005 | 8 |
| ● special colours | X |

ACCESSORY COLOUR

| | |
|-----------------------|---|
| ○ pure white RAL 9010 | 7 |
| ● jet black RAL 9005 | 8 |



PAL suspended




DOWNLIGHT

| INS. POWER | COLOUR TEMP. | LUM. FLUX | Ø (mm) | ORDER CODE |
|------------|--------------|-----------|--------|-------------|
| 9.1W | 2700K | 472lm | 80 | 050-1 8 1 1 |
| | 3000K | 498lm | | |
| 9.1W | 2700K | 472lm | 120 | 050-1 8 1 3 |
| | 3000K | 498lm | | |

Mounting accessories

RING track mounted

| TYPE | Ø-H (mm) | ORDER CODE |
|---------------|----------|------------|
| MOVE IT 25 S | 50-70 | 050-151011 |
| MOVE IT 25/45 | 50-91 | 050-051011 |



RING ceiling mounted


| TYPE | Ø-H (mm) | ORDER CODE |
|-------------------|----------|------------|
| MOVE IT 25/25S/45 | 50-88 | 050-051021 |



INSET POWER in watts is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI≥90, colour white, glass

**Quickinfo**

2700 K
CRI ≥ 95, 3 SDCM
up to 72 lm/W
L90 @ 50 000h
non DIM, DALI-2

Types**Colours**

wästberg

w201 Extra small pendant

Design by Claesson Koivisto Rune

Order options


| CABLE SUSPENSION | |
|-------------------|---|
| 3000 mm | 5 |
| 3000 mm with hook | 6 |

| COLOUR TEMPERATURE | |
|--------------------|--|
| 2700 K | |

| CONTROL | |
|---------|---|
| non DIM | 1 |
| DALI-2 | 3 |

| MATERIAL COLOUR | |
|--------------------------|---|
| ○ traffic white RAL 9016 | 7 |
| ● jet black RAL 9005 | 8 |

| ACCESSORY COLOUR | |
|-----------------------|---|
| ○ pure white RAL 9010 | 7 |
| ● jet black RAL 9005 | 8 |




w201 Extra small pendant s1



DOWNLIGHT

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|------------|
| 7.9W | 2700 K | 544lm | 050-04814 |




w201 Extra small pendant s2



DOWNLIGHT

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|------------|
| 7.9W | 2700 K | 572lm | 050-04824 |




w201 Extra small pendant s3



DOWNLIGHT

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|------------|
| 7.9W | 2700 K | 572lm | 050-04834 |

Mounting accessories



RING track mounted

| TYPE | Ø-H (mm) | ORDER CODE |
|---------------|----------|------------|
| MOVE IT 25 S | 50-70 | 050-151011 |
| MOVE IT 25/45 | 50-91 | 050-051011 |



RING ceiling mounted

| TYPE | Ø-H (mm) | ORDER CODE |
|-------------------|----------|------------|
| MOVE IT 25/25S/45 | 50-88 | 050-051021 |

INSET POWER in watts is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI≥90, colour white

MOVE IT 45 system

acoustic elements

EN Acoustic element made of high quality, self-supporting, recycled PET felt with sound absorbing properties; different versions: choice of square or rectangular design; high quality visual and tactile surface with embossed pattern; foreign fiber inclusions possible; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; for installation in the MOVE IT 45 suspended system composed of node connectors and profiles; subsequent insertion in already installed MOVE IT suspended system possible; installation without tools

DE Akustikelement aus hochwertigem, selbsttragendem, recyceltem PET-Filz mit schallabsorbierenden Eigenschaften; unterschiedliche Varianten: Bauform wahlweise quadratisch oder rechteckig; optisch und haptisch hochwertige Oberfläche mit Musterprägung; Fremdfasereinschlüsse möglich; Absorption des Direktschalls und des von der Decke reflektierten Schalls; dadurch hohe akustische Performance; zum Einlegen in das MOVE IT 45 suspended system aus Knotenverbindern und Profilen; nachträgliches Einlegen in bereits installiertes MOVE IT suspended system möglich; werkzeuglose Montage


Quickinfo

PET felt

from recycled material

available as B-s1, d0


Types



Colours



easy
mounting



sound absorption
by recycled PET


Order options

| MATERIAL COLOUR | | <input checked="" type="checkbox"/> |
|-----------------------------------|--|-------------------------------------|
| <input type="radio"/> white | | W |
| <input type="radio"/> marble grey | | D |
| <input type="radio"/> black | | L |

Options on request

MATERIAL COLOUR
 painted in custom colour _____

DIMENSIONS
 cut in custom dimensions _____

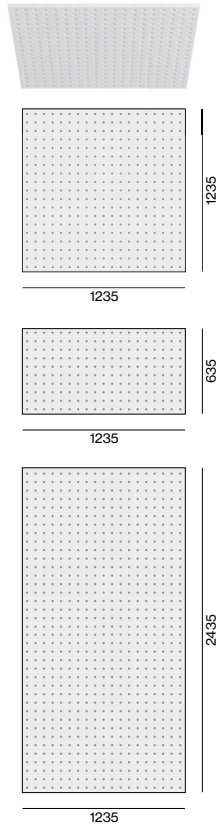

MOVE IT 45 acoustic suspended

PET
felt

ACOUSTIC ELEMENT

| TYPE | L-W-H (mm) | ORDER CODE |
|-------------------|--------------|--|
| square grid inlay | 1235-1235-25 | 050-231121 <input checked="" type="checkbox"/> |
| half grid inlay | 635-1235-25 | 050-231221 <input checked="" type="checkbox"/> |
| double grid inlay | 2435-1235-25 | 050-231321 <input checked="" type="checkbox"/> |

mounting only in MOVE IT 45 system with NODE connector + track 1220 mm, 620 mm or 2420 mm

ACOUSTIC EXAMPLES

