


### Quickinfo

4000 K  
 CRI ≥ 90, 3 SDCM  
 UGR ≤ 19 / 65° ≤ 3000 cd/m<sup>2</sup>  
 up to 117 lm/W  
 L95 @ 50 000 h  
 DALI-2  
 microprismatic (UGR ≤ 19)

### Types



### Colours



### Light distribution



## TASK circle

suspended

EN Ring-shaped suspended luminaire, consisting of single elements in quarter circle or rectangular shape; Luminaire housing made of aluminium – rounded edges; ultra low-profile design (only 15 mm); surface powder coated; cable suspension, tool-less height adjustment; convenient quick mounting system without tools; incl. feed; direct light distribution by LGP body (Light Guiding Prism); side coupled light directed downwards by laser engraving; indirect component with special PCBs for increased luminous flux and maximum ceiling illumination; completely homogeneous illumination; energy-eff. LEDs – very good colour rendering; canopy for through wiring


II Corpo illuminante a sospensione di forma circolare, composto da singoli elementi in un quarto di cerchio o in una forma rettangolare; corpo illuminante in alluminio – bordi arrotondati; forma ultrapiatta (solo 15 mm); verniciatura a polvere; cavo regolabile in altezza senza attrezzi; pratico sistema di montaggio rapido senza utensili; incl. cavo di alimentazione; distribuzione della luce diretta con sistema LGP-Body (Light Guiding Prism); luce convogliata lateralmente e direzionata in basso tramite incisione laser; percentuale indiretta con piastre a flusso luminoso potenziato e massima illuminazione del soffitto; illuminazione assolutamente omogenea; LED a risp. energ. – ottima resa cromatica; rosone per cablaggio passante




DiiA® standards  
 251, 252, 253



click-  
 system



DIN EN 12464-1  
 UGR ≤ 19



CRI ≥ 98  
 XPECTRUM

### Order options

#### COLOUR TEMPERATURE

4000 K

#### CONTROL

DALI-2

#### LUMINAIRE COLOUR

- pure white RAL 9010 7
- jet black RAL 9005 8

#### LIGHT OPTIC COVER

microprismatic (UGR ≤ 19)



### Options on request

#### COLOUR RENDERING INDEX

CRI ≥ 80  
CRI ≥ 98 XPECTRUM

#### FORM

for other configurations see  
TASK S suspended system

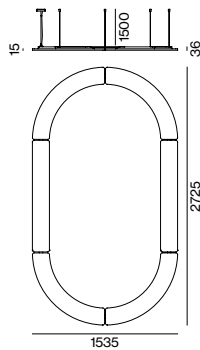

### TASK circle suspended



#### DIRECT / INDIRECT POWER

SYSTEM POWER 169 W    COLOUR TEMP. 4000 K    LUMINOUS FLUX ↓ 12900 / ± 6870 lm    ORDER CODE 059-528113 K


### TASK long circle suspended



#### DIRECT / INDIRECT POWER

SYSTEM POWER 252 W    COLOUR TEMP. 4000 K    LUMINOUS FLUX ↓ 20200 / ± 10460 lm    ORDER CODE 059-528213 K

### Technical data



#### TASK long circle

252 W, 4000 K, direct/indirect power

#### ROOM VALUES

Room dimensions 5,4 × 4 × 2,8 m  
Reflection factor 0,7 | 0,5 | 0,2  
Maintenance factor 0,8  
Suspension height 2,25 m


#### CALCULATION SURFACE .....

Surface dimensions 3,2 × 1,2 m  
Surface height 0,75 m  
Average illuminance (E<sub>m</sub>) > 500 lx  
Uniformity (U<sub>0</sub>) > 0,6

#### GLARE EVALUATION

Table Classification X=4H | Y=8H | S=0.25H  
UGR transversal ≤ 19  
UGR axial ≤ 19

### Light distribution



microprismatic  
direct/indirect power

LUMINOUS FLUX value calculated for  
CRI ≥ 90, colour white, cover microprismatic