


# MINIMAL 100 mid lumen

trimless

052-33L3517G



Projekt / Typ
Notizen
Anzahl / Datum

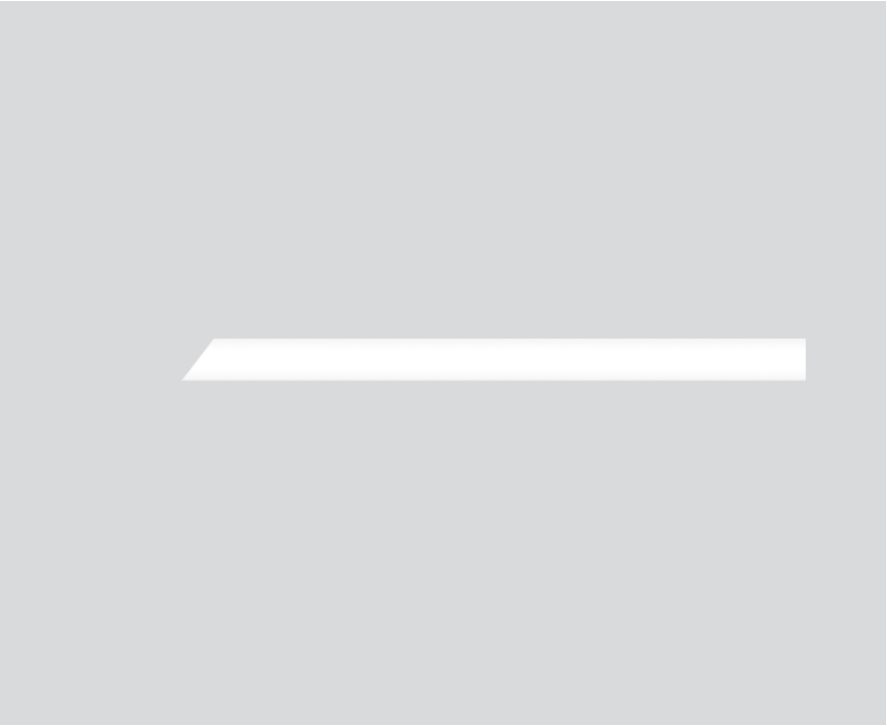

RG0 IEC 62471	220-240V	X-PERT	X-PERT
------------------	----------	--------	--------

## Allgemein

Decke , Einbau
Weiß , RAL9016 <sup>1</sup>
1560 lm/m
IP20
1360 lm

## LED

3000 K
CRI ≥ 80
L90 / 50000 h
photobiologische Sicherheit RG 0 - kein Risiko
initial MacAdam ≤ 3 SDCM
MR 0.54
MDER 0.49

## Optisch

Microprismatic
microprismatic
UGR < 19 , ≥65° <3000 cd/m <sup>2</sup>
PstLM ≤ 1.0 <sup>2</sup>
SVM ≤ 0.4 <sup>2</sup>

## Elektrisch

nicht dimmbar
System 13.0 W
SK1 220-240V
System 105 lm/W <sup>3</sup>
15 W/m

## Abmessungen


randlos
Länge 876 mm
Breite 102 mm
Höhe 82 mm
3.1 kg

## Ausschnitt


Länge 879 mm
Breite 106 mm
min. Deckenstärke 8 mm
max. Deckenstärke 25 mm
Einbautiefe 106 mm

<sup>1</sup> RAL Code  
<sup>2</sup> Wert von umgebendem Produkt bei Vollast (ungedimmt)  
<sup>3</sup> inkl. Berücksichtigung von optischen Verlusten und der Effizienz des Betriebsgeräts

## Lichtverteilung



## Produktskizze



## Montage- anleitung



## Beleuchtungs- rechner

