



SASSO 60/100 round

wall


EN Cylindrical wall surface mounted luminaire made of aluminium, available in 2 sizes; light inset lacquered; housing powder coated; optionally symmetric direct or direct / indirect light distribution; homogeneous wall or ceiling illumination through uniform light distribution; precise radiation characteristic due to high quality lens system; installation of variant DIRECT optionally for floor or ceiling illumination; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; efficient LEDs with very good colour rendering

DE Zylindrische Wandanbauleuchte aus Aluminium in 2 Größen; Lichteinsatz lackiert; Gehäuse pulverbeschichtet; wahlweise symmetrisch direkte oder direkt/indirekte Abstrahlcharakteristik; homogene Wand- bzw. Deckenaufhellung durch gleichmäßige Lichtverteilung; präzise Abstrahlcharakteristik durch hochwertige Linsenoptik; Montage Variante DIRECT wahlweise zur Boden- oder Deckenaufhellung; COB (Chip on Board) Technologie für höchste Effizienz; keine Mehrfachschatten; effiziente LEDs mit sehr guter Farbwiedergabe

Quickinfo

2700 K, 3000 K, 4000 K
 CRI ≥ 90, 2 SDCM
 SASSO 60 up to 69lm/W
 SASSO 100 up to 61lm/W
 L80 @ 50000h
 non DIM, DALI-2

Types

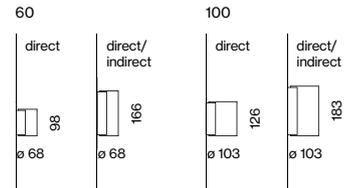


Housing colours



Inset colours



Light distributions



direct and direct/
indirect illumination



high quality
lens



easy
mounting



CRI ≥ 95
2 SDCM

Order options

COLOUR TEMPERATURE

2700 K	4
3000 K	5
4000 K	6

CONTROL

non DIM	1
DALI-2	3

HOUSING COLOUR

<input type="radio"/> traffic white RAL 9016	7
<input checked="" type="radio"/> jet black RAL 9005	1

INSET COLOUR

<input type="radio"/> traffic white RAL 9016 (UGR _{≤22})	7
<input type="radio"/> matt silver (UGR _{≤19})	4
<input checked="" type="radio"/> jet black RAL 9005 (UGR _{≤16})	1
<input type="radio"/> gold dust RAL 260-M (UGR _{≤19})	9




BEAM ANGLE

opal lens

Options on request

COLOUR RENDERING INDEX

CRI ≥ 95, 2 SDCM



SASSO 60 round wall



DIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
11.7 W	2700 K	647 lm	0 48-3 1 5 0 :: ◆ ◆ ■ ■ ○
	3000 K	683 lm	
	4000 K	724 lm	

DIRECT / INDIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
20.4 W	2700 K	2 × 643 lm	0 48-3 1 6 0 :: ◆ ◆ ■ ■ ○
	3000 K	2 × 678 lm	
	4000 K	2 × 720 lm	

SASSO 100 round wall



DIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
20.4 W	2700 K	1130 lm	0 48-3 4 5 0 :: ◆ ◆ ■ ■ ○
	3000 K	1180 lm	
	4000 K	1240 lm	

DIRECT / INDIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
41 W	2700 K	2 × 1130 lm	0 48-3 4 6 0 :: ◆ ◆ ■ ■ ○
	3000 K	2 × 1180 lm	
	4000 K	2 × 1240 lm	