



reddot winner 2024



## MOVE IT PRO system

trimless

**EN** Extruded aluminium profile with 45 mm width and 55 mm height; for trimless installation in 12.5 mm plasterboard ceilings; designed for continuous lighting systems, L / T / X connectors for flexible system design; with integrated 3-phase copper conductors + 4 emergency lighting copper conductors (2 emergency lighting circuits) + 2 DALI copper conductors for take off of supply voltage, emergency lighting power supply and DALI signal; customcut possible; surface powder coated; insets, incl. high power adapter + converter can be installed flexibly and without tools; light inserts with different patterns of light distribution, emergency light inserts (escape sign and emergency luminaires) for operation on a central battery system and sensor inserts can be integrated

**DE** Aluminiumstrangpressprofil mit 45 mm Breite und 55 mm Höhe; für randlosen Einbau in 12,5 mm Gipskartondecken; ausgelegt für durchgehende Lichtsysteme, L- / T- / X-Verbinder für flexiblen Systemaufbau; mit integrierten 3-Phasen Kupferleitern + 4 Notlicht-Kupferleitern (2 Notlichtkreise) + 2 DALI-Kupferleitern für Abnahme von Versorgungsspannung, Notlicht-Spannungsversorgung und DALI Signal; auf Kundenwunsch ablängbar; Oberfläche pulverbeschichtet; flexible und werkzeuglose Montage der Einsätze, inkl. High Power Adapter + Konverter; Leuchteinsätze mit unterschiedlichen Abstrahlcharakteristiken, Notlichteinsätze (Rettungszeichen- und Sicherheitsleuchten) für den Betrieb an einer Zentralbatterieanlage und Sensor-Einsätze integrierbar

### Quickinfo

DALI-2

### Types

recessed  
trimless



connectors



L-connector

T-connector

X-connector

### Colours



up to 192lm/W  
(high efficiency)

## Order options

### CONTROL



DALI-2

### MATERIAL COLOUR

- jet black RAL 9005 8
- traffic white RAL 9016 7



## MOVE IT PRO trimless



### INSTALLATION TRACK 220V-250V/440V | EM 220V-250V

L (mm)	TYPE	ORDER CODE
1000	channel	086-512113
2000	channel	086-512213
3000	channel	086-512313
4000	channel	086-512413
custom cut	channel	E83810

## Pole options



## Accessories

### END CAPS

TYPE	ORDER CODE
end cap	086-522011

### BLIND COVER

L (mm)	TYPE	ORDER CODE
1000	blind cover (aluminium)	086-601000
2000	blind cover (aluminium)	086-602000
3000	blind cover (aluminium)	086-603000
25000	blind cover	086-608250

### POWER FEEDER WITH EMERGENCY CONDUCTORS



supply 220-250V/440V | EM 220-250V

TYPE	ORDER CODE
end feed poles right	086-522313
end feed poles left	086-522413
middle feed	086-522323

### POWER FEEDER WITHOUT EMERGENCY CONDUCTORS


supply 220-250V/440V

TYPE	ORDER CODE
intrack feed (incl. cable 3000mm)	086-5213338



## CONNECTORS

TYPE	ORDER CODE
linear connector electrical	086-5211138
L-connector poles external	086-522133
L-connector poles internal	086-522233
L-connector mechanical	086-522230
T-connector poles internal   right	086-522143
T-connector poles internal   left	086-522243
T-connector poles external   right	086-522173
T-connector poles external   left	086-522273
T-connector (mechanical)	086-522240
X-connector	086-522153
X-connector (mechanical)	086-522150

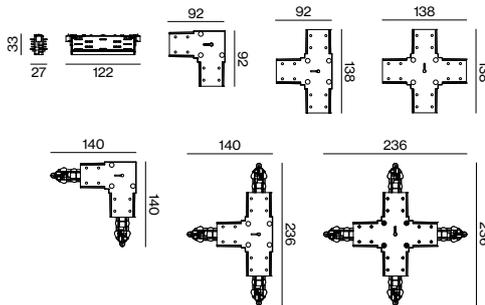

## MOUNTING ACCESSORIES

TYPE	ORDER CODE
mechanical linear connector (pair)	050-2011110
conductors cutting tool	086-5219110





reddot winner 2024



## MOVE IT PRO system

surface/suspended

**EN** Extruded aluminium profile with 45 mm width and 59 mm height; for ceiling surface mounting or suspended mounting (cable suspension); height adjustment without tools; designed for continuous lighting systems, L / T / X connectors for flexible system design; with integrated 3-phase copper conductors + 4 emergency lighting copper conductors (2 emergency lighting circuits) + 2 DALI copper conductors for take off of supply voltage, emergency lighting power supply and DALI signal; customcut possible; surface powder coated; insets, incl. high power adapter + converter can be installed flexibly and without tools; light inserts with different patterns of light distribution, emergency light inserts (escape sign and emergency luminaires) for operation on a central battery system and sensor inserts can be integrated

**DE** Aluminiumstrangpressprofil mit 45 mm Breite und 59 mm Höhe; für Deckenanbaumontage oder für abgehängte Montage (Seilabhängung); werkzeuglose Höhenverstellung; ausgelegt für durchgehende Lichtsysteme, L- / T- / X-Verbinder für flexiblen Systemaufbau; mit integrierten 3-Phasen Kupferleitern + 4 Notlicht-Kupferleitern (2 Notlichtkreise) + 2 DALI-Kupferleitern für Abnahme von Versorgungsspannung, Notlicht-Spannungsversorgung und DALI Signal; auf Kundenwunsch ablängbar; Oberfläche pulverbeschichtet; flexible und werkzeuglose Montage der Einsätze, inkl. High Power Adapter + Konverter; Lichteinsätze mit unterschiedlichen Abstrahlcharakteristiken, Notlichteinsätze (Rettungszeichen- und Sicherheitsleuchten) für den Betrieb an einer Zentralbatterieanlage und Sensor-Einsätze integrierbar

### Quickinfo

DALI-2

### Types

surface      suspended



connectors



L-connector

T-connector

X-connector

Colours



up to 192 lm/W  
(high efficiency)

## Order options

### CONTROL

DALI-2

### MATERIAL COLOUR

- jet black RAL 9005 8
- traffic white RAL 9016 7

### MATERIAL COLOUR CABLE SUSPENSION

- black 8
- chrome 0



## MOVE IT PRO surface/suspended



### INSTALLATION TRACK 220V-250V/440V | EM 220V-250V

L (mm)	TYPE	ORDER CODE
1000	channel	086-511113
2000	channel	086-511213
3000	channel	086-511313
4000	channel	086-511413
custom cut	channel	E83820

## Accessories

### END CAPS

TYPE	ORDER CODE
end cap	086-521011

### BLIND COVER

L (mm)	TYPE	ORDER CODE
1000	blind cover (aluminium)	086-601000
2000	blind cover (aluminium)	086-602000
3000	blind cover (aluminium)	086-603000
25000	blind cover	086-608250

### POWER FEEDER WITH EMERGENCY CONDUCTORS

supply 220-250V/440V | EM 220-250V

TYPE	ORDER CODE
end feed poles right	086-521413
end feed poles left	086-521313
middle feed	086-521323

### POWER FEEDER WITHOUT EMERGENCY CONDUCTORS

supply 220-250V/440V

TYPE	ORDER CODE
intrack feed (incl. cable 3000mm)	086-521333

### CONNECTORS

TYPE	ORDER CODE
linear connector electrical	086-521113
L-connector poles external	086-521133
L-connector poles internal	086-521233
L-connector mechanical	086-521230
T-connector poles internal   right	086-521143
T-connector poles internal   left	086-521243
T-connector poles external   right	086-521173
T-connector poles external   left	086-521273
T-connector (mechanical)	086-521240
X-connector	086-521153
X-connector (mechanical)	086-521150






### MOUNTING ACCESSORIES

TYPE	ORDER CODE
ceiling fastener	086-521511
suspension bracket	086-521521
linear suspension connector (mechanical)	086-521531
linear connector (mechanical)	086-521110
conductors cutting tool	086-521911
drilling template for indirect inset	086-521951

### CABLE SUSPENSION

TYPE	L (mm)	ORDER CODE
cable suspension	1500	086-521711
cable suspension	3000	086-521721
cable suspension	6000	086-521731
connector cable suspension	1500	058-301811
connector cable suspension	3000	058-301821
connector cable suspension	6000	058-301831
tool for connector cable suspension		050-204921

## Pole options

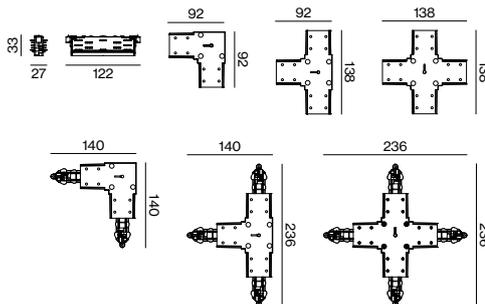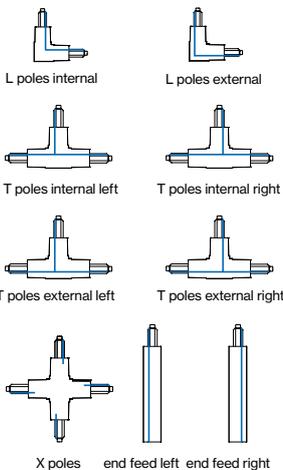



**Quickinfo**

DALI-2

**Types**



connector



L-connector

**Colours**



# MOVE IT PRO emergency SELV system

surface/suspended

**EN** Extruded aluminium profile with 45 mm width and 59 mm height; for ceiling surface mounting or suspended mounting (cable suspension); height adjustment without tools; designed for continuous lighting systems, L / T / X connectors for flexible system design; with integrated 3-phase copper conductors + 4 emergency lighting copper conductors (2 emergency lighting circuits SELV) + 2 DALI copper conductors for take off of supply voltage, emergency lighting power supply and DALI signal; customcut possible; surface powder coated; insets, incl. high power adapter + converter can be installed flexibly and without tools; light inserts with different patterns of light distribution, emergency light inserts (escape sign and emergency luminaires) for operation on a central battery system and sensor inserts can be integrated

**DE** Aluminiumstrangpressprofil mit 45 mm Breite und 59 mm Höhe; für Deckenanbaumontage oder für abgehängte Montage (Seilabhängung); werkzeuglose Höhenverstellung; ausgelegt für durchgehende Lichtsysteme, L- / T- / X-Verbinder für flexiblen Systemaufbau; mit integrierten 3-Phasen Kupferleitern + 4 Notlicht-Kupferleitern (2 Notlichtkreise SELV) + 2 DALI-Kupferleitern für Abnahme von Versorgungsspannung, Notlicht-Spannungsversorgung und DALI Signal; auf Kundenwunsch ablängbar; Oberfläche pulverbeschichtet; flexible und werkzeuglose Montage der Einsätze, inkl. High Power Adapter + Konverter; Lichteinsätze mit unterschiedlichen Abstrahlcharakteristiken, Notlichteinsätze (Rettungszeichen- und Sicherheitsleuchten) für den Betrieb an einer Zentralbatterieanlage und Sensor-Einsätze integrierbar



up to 192 lm/W  
(high efficiency)

## Order options

### CONTROL

DALI-2

### MATERIAL COLOUR

- jet black RAL 9005 8
- traffic white RAL 9016 7


### MATERIAL COLOUR

### CABLE SUSPENSION

- black 8
- chrome 0



## MOVE IT PRO emergency SELV surface/suspended



### INSTALLATION TRACK 220 V – 250 V / 440 V | EM 0-48 V

L (mm)		ORDER CODE
1000	channel	086-531113
2000	channel	086-531213
3000	channel	086-531313
4000	channel	086-531413
custom cut	channel	E83840



## Pole options



L poles internal



L poles external



end feed left



end feed right



## Accessories

### END CAPS

TYPE	ORDER CODE
end cap	086-521011

### BLIND COVER

L (mm)		ORDER CODE
1000	blind cover (aluminium)	086-601000
2000	blind cover (aluminium)	086-602000
3000	blind cover (aluminium)	086-603000
25000	blind cover	086-608250



### POWER FEEDER WITH EMERGENCY CONDUCTORS

supply 220-250V / 440 V | EM 0-48 V

TYPE	ORDER CODE
end feed poles right	086-541413
end feed poles left	086-541313
middle feed	086-541323



### POWER FEEDER WITHOUT EMERGENCY CONDUCTORS

supply 220-250V / 440 V

TYPE	ORDER CODE
intrack feed (incl. cable 3000 mm)	086-5213338



### CONNECTORS

TYPE	ORDER CODE
linear connector electrical	086-5411138
L-connector poles external	086-541133
L-connector poles internal	086-541233
L-connector mechanical	086-521230



### MOUNTING ACCESSORIES

TYPE	ORDER CODE
ceiling fastener	086-521511
suspension bracket	086-521521
linear suspension connector (mechanical)	086-521531
linear connector (mechanical)	086-521110



conductors cutting tool	086-5219110
drilling template for indirect inset	086-5219510



### CABLE SUSPENSION

TYPE	L (mm)	ORDER CODE
cable suspension	1500	086-521711
cable suspension	3000	086-521721
cable suspension	6000	086-521731
connector cable suspension	1500	058-301811
connector cable suspension	3000	058-301821
connector cable suspension	6000	058-301831
tool for connector cable suspension		050-2049210

## Quickinfo

2700 K, 3000 K, 3500 K, 4000 K  
 CRI  $\geq$  80, CRI  $\geq$  90, 3 SDCM  
 UGR  $\leq$  19 / 65°  $\leq$  1500 cd/m<sup>2</sup>  
 up to 187 lm/W  
 up to 2940 lm/m  
 L90 @ 50 000 h  
 DALI-2

## Types

louver



## Colours



## Light distribution



super  
wide  
flood



reddot winner 2024



# LOUVER

linear inset

**EN** Linear light inset made of plastic; light inset, incl. high power adapter + converter can be installed flexibly and without tools; flush with profile system; high quality reflector with micro-faceted, aluminum-vaporised surface; precise radiation characteristic with symmetrical light distribution; for use in schools and offices; energy-efficient LEDs with very good colour rendering

**DE** Linear-Lichteinsatz aus Kunststoff; Lichteinsatz, inkl. High Power Adapter + Konverter, werkzeuglos einsetz- und verschiebbar; bündig im Profilsystem; hochwertiger Reflektor mit mikrofaccettierter, aluminiumbedampfter Oberfläche; präzise Abstrahlcharakteristik mit symmetrischer Lichtverteilung; für den Einsatz in Schulen und im Bürobereich; energieeffiziente LEDs mit sehr guter Farbwiedergabe



DIN EN 12464-1  
UGR  $\leq$  19



up to 187 lm/W  
(high efficiency)

## Order options

### COLOUR TEMPERATURE

2700K CRI ≥ 90	9
3000K CRI ≥ 90	0
3500K CRI ≥ 90	2
4000K CRI ≥ 90	1
2700K CRI ≥ 80	4
3000K CRI ≥ 80	5
3500K CRI ≥ 80	7
4000K CRI ≥ 80	6

### CONTROL

DALI-2

### LIGHT OPTIC

super wide flood 74°

### MATERIAL COLOUR

chrome reflector	4
black reflector	8



## LOUVER inset



### REFLECTOR WIDE

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
18.4W	2700K	2580lm	1000	0 8 6 - 6 4 1 0 :: 3 X
	3000K	2580lm		
	3500K	2760lm		
	4000K	2940lm		
26.7W	2700K	3870lm	1500	0 8 6 - 6 4 2 0 :: 3 X
	3000K	3870lm		
	3500K	4140lm		
	4000K	4400lm		
34W	2700K	5160lm	2000	0 8 6 - 6 4 3 0 :: 3 X
	3000K	5160lm		
	3500K	5520lm		
	4000K	5870lm		
41W	2700K	6450lm	2500	0 8 6 - 6 4 4 0 :: 3 X
	3000K	6450lm		
	3500K	6890lm		
	4000K	7340lm		
47W	2700K	7740lm	3000	0 8 6 - 6 4 5 0 :: 3 X
	3000K	7740lm		
	3500K	8270lm		
	4000K	8810lm		



**Quickinfo**

2700 K, 3000 K, 3500 K, 4000 K  
 CRI ≥ 80, CRI ≥ 90, 3 SDCM  
 UGR ≤ 19  
 up to 189 lm/W  
 up to 2900 lm/m  
 L90 @ 50 000 h  
 DALI-2

**Types**



**Colour**



**Light distribution**



wide flood



reddot winner 2024



**LENS**

linear inset

**EN** Linear light inset made of plastic; light inset, incl. high power adapter + converter can be installed flexibly and without tools; flush with profile system; equipped with specially computed wide beam lenses; precise radiation characteristic with symmetrical light distribution; for use in schools and offices; energy-efficient LEDs with very good colour rendering

**DE** Linear-Lichteinsatz aus Kunststoff; Lichteinsatz, inkl. High Power Adapter + Konverter, werkzeuglos einsetz- und verschiebbar; bündig im Profilsystem; bestückt mit speziell berechneten wide beam Linsen; präzise Abstrahlcharakteristik mit symmetrischer Lichtverteilung; für den Einsatz in Schulen und im Bürobereich; energieeffiziente LEDs mit sehr guter Farbwiedergabe



DIN EN 12464-1  
 UGR ≤ 19



up to 189 lm/W  
 (high efficiency)

### Order options


COLOUR TEMPERATURE	
2700K CRI ≥ 90	9
3000K CRI ≥ 90	0
3500K CRI ≥ 90	2
4000K CRI ≥ 90	1
2700K CRI ≥ 80	4
3000K CRI ≥ 80	5
3500K CRI ≥ 80	7
4000K CRI ≥ 80	6

### CONTROL

DALI-2

### LIGHT OPTIC

wide flood 68°



### LENS inset



### LENS WIDE


SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
18.2W	3000K	2590lm	1000	0 8 6 - 6 7 1 0 :: 30 W
	3500K	2770lm		
	4000K	2940lm		
26.4W	3000K	3880lm	1500	0 8 6 - 6 7 2 0 :: 30 W
	3500K	4150lm		
	4000K	4420lm		
33W	3000K	5170lm	2000	0 8 6 - 6 7 3 0 :: 30 W
	3500K	5530lm		
	4000K	5890lm		
41W	3000K	6470lm	2500	0 8 6 - 6 7 4 0 :: 30 W
	3500K	6910lm		
	4000K	7360lm		
46W	3000K	7760lm	3000	0 8 6 - 6 7 5 0 :: 30 W
	3500K	8300lm		
	4000K	8830lm		

## Quickinfo

2700 K, 3000 K, 3500 K, 4000 K  
 CRI  $\geq$  80, CRI  $\geq$  90, 3 SDCM  
 up to 163 lm/W  
 up to 2590 lm/m  
 L90 @ 50 000 h  
 DALI-2

## Types

lens wallwasher



## Colour



## Light distribution



wall  
wash.



reddot winner 2024



## LENS

linear inset

**EN** Linear light inset made of plastic; light inset, incl. high power adapter + converter can be installed flexibly and without tools; flush with profile system; equipped with specially computed wallwasher lenses; precise radiation characteristic with asymmetrical light distribution; energy-efficient LEDs with very good colour rendering

**DE** Linear-Lichteinsatz aus Kunststoff; Lichteinsatz, inkl. High Power Adapter + Konverter, werkzeuglos einsetz- und verschiebbar; bündig im Profilsystem; bestückt mit speziell berechneten wallwasher Linsen; präzise Abstrahlcharakteristik mit asymmetrischer Lichtverteilung; energieeffiziente LEDs mit sehr guter Farbwiedergabe



up to 190 lm/W  
(high efficiency)

## Order options

### COLOUR TEMPERATURE

2700 K CRI ≥ 90	9
3000 K CRI ≥ 90	0
3500 K CRI ≥ 90	2
4000 K CRI ≥ 90	1
2700 K CRI ≥ 80	4
3000 K CRI ≥ 80	5
3500 K CRI ≥ 80	7
4000 K CRI ≥ 80	6

### CONTROL

DALI-2

### LIGHT OPTIC

wallwasher




## LENS inset



## LENS WALLWASHER

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
18.4W	3000K	2270lm	1000	0 8 6 - 6 7 1 0  30 A
26.7W	4000K	2590lm	1500	0 8 6 - 6 7 2 0  30 A
	3000K	3330lm		
34W	4000K	3790lm	2000	0 8 6 - 6 7 3 0  30 A
	3000K	4440lm		
41W	4000K	5050lm	2500	0 8 6 - 6 7 4 0  30 A
	3000K	5550lm		
46W	4000K	6310lm	3000	0 8 6 - 6 7 5 0  30 A
	3000K	6650lm		
	4000K	7580lm		

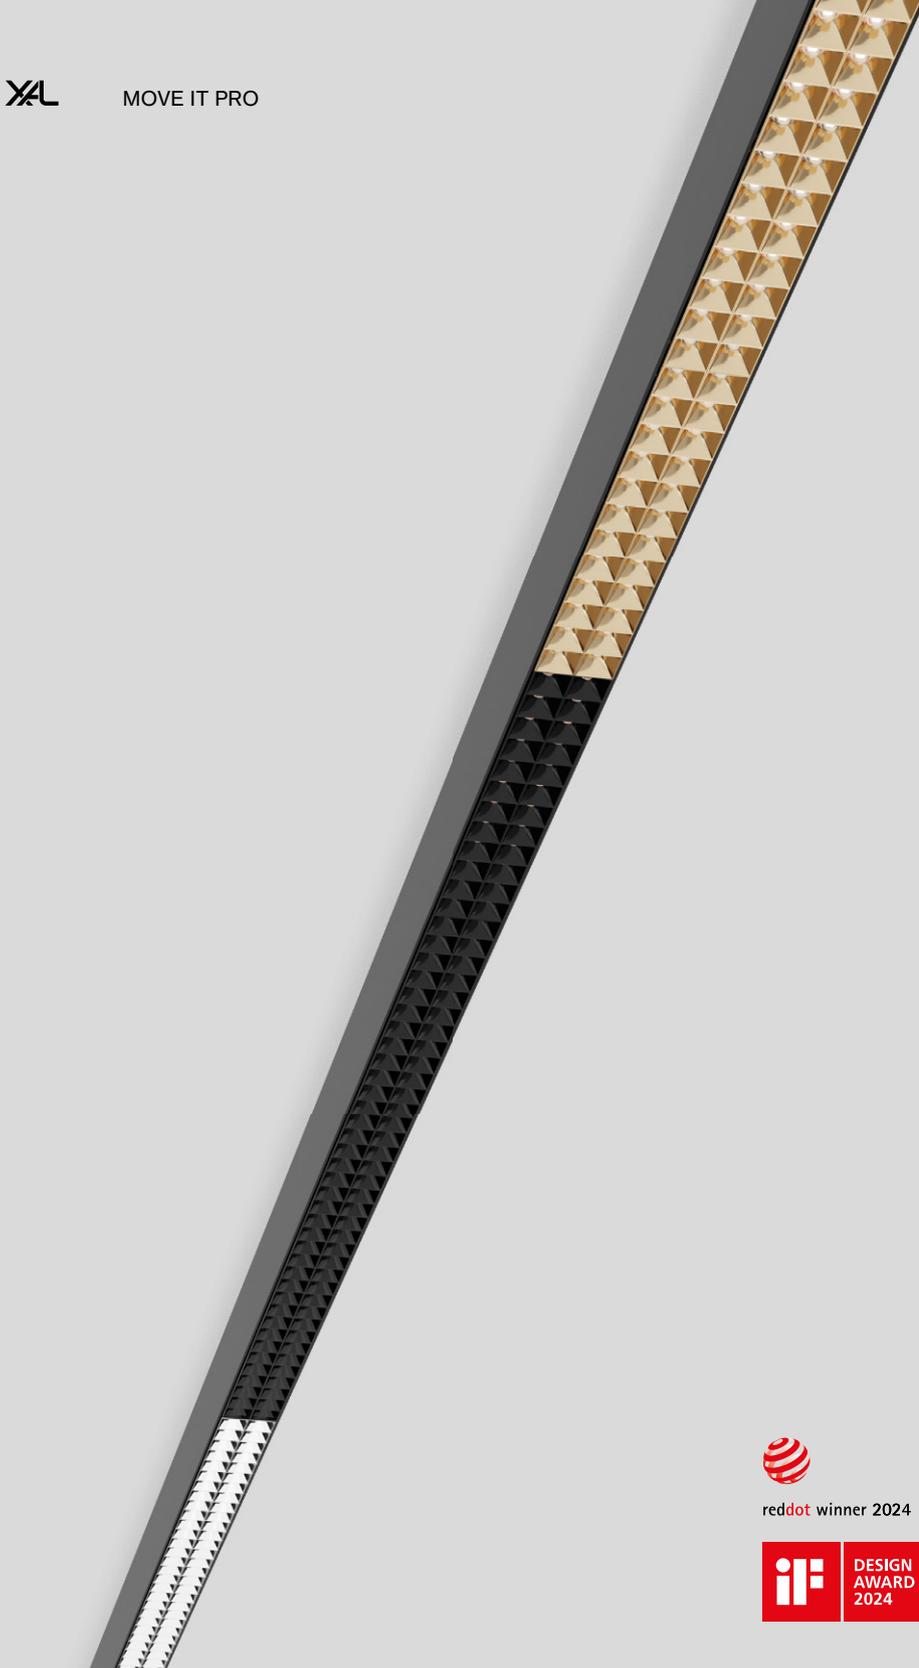

reddot winner 2024




**Quickinfo**

2700 K, 3000 K, 3500 K, 4000 K  
 CRI ≥ 80, CRI ≥ 90, 3 SDCM  
 UGR ≤ 16, 19 / 65° ≤ 1500 cd/m²  
 up to 183 lm/W  
 up to 2870 lm/m  
 L90 @ 50 000 h  
 DALI-2

**Types**

spot line



**Colours**



**Light distributions**




**SPOT LINE**

linear inset

**EN** Linear light inset made of plastic; light inset, incl. high power adapter + converter can be installed flexibly and without tools; flush with profile system; fitted with single LED light points; good glare reduction due to recessed light point plane; despite this increased efficiency through special lens technology; inserted lenses with medium or wide flood radiation characteristic; for use in schools, retail and offices; energy-efficient LEDs with very good colour rendering

**DE** Linear-Lichteinsatz aus Kunststoff; Lichteinsatz, inkl. High Power Adapter + Konverter, werkzeuglos einsetz- und verschiebbar; bündig im Profilsystem; bestückt mit LED Einzellichtpunkten; gute Entblendung durch zurückversetzte Lichtpunktebene; trotzdem erhöhte Effizienz durch spezielle Linsentechnik; eingesetzte Linsen mit medium oder wide flood Strahlungscharakteristik; für den Einsatz in Schulen, Retail- und im Bürobereich; energieeffiziente LEDs mit sehr guter Farbwiedergabe



DIN EN 12464-1  
 UGR ≤ 16



up to 183 lm/W  
 (high efficiency)

## Order options

### COLOUR TEMPERATURE ◆◆

2700 K CRI ≥ 90	9
3000 K CRI ≥ 90	0
3500 K CRI ≥ 90	2
4000 K CRI ≥ 90	1
2700 K CRI ≥ 80	4
3000 K CRI ≥ 80	5
3500 K CRI ≥ 80	7
4000 K CRI ≥ 80	6

### CONTROL

DALI-2 


---

### LIGHT OPTIC ▲

medium 28°	M
wide flood 67°	W

### MATERIAL COLOUR ▣

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● gold	9



## SPOT LINE inset



UGR  
≤ 16

cd/m<sup>2</sup>  
≤ 1500

CRI  
≥ 90

DALI  
1 ADDR.

220-240V

X-PERT

X-PERT

### SPOT LINE

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
18.4W	2700K	2460lm	1000	0 8 6 - 6 3 1 0 <span style="color: blue;">◆◆</span> <span style="color: blue;">▲</span>
	3000K	2460lm		
	3500K	2630lm		
	4000K	2800lm		
26.7W	2700K	3700lm	1500	0 8 6 - 6 3 2 0 <span style="color: blue;">◆◆</span> <span style="color: blue;">▲</span>
	3000K	3700lm		
	3500K	3950lm		
	4000K	4210lm		
34W	2700K	4930lm	2000	0 8 6 - 6 3 3 0 <span style="color: blue;">◆◆</span> <span style="color: blue;">▲</span>
	3000K	4930lm		
	3500K	5270lm		
	4000K	5610lm		
41W	2700K	6160lm	2500	0 8 6 - 6 3 4 0 <span style="color: blue;">◆◆</span> <span style="color: blue;">▲</span>
	3000K	6160lm		
	3500K	6580lm		
	4000K	7010lm		
47W	2700K	7390lm	3000	0 8 6 - 6 3 5 0 <span style="color: blue;">◆◆</span> <span style="color: blue;">▲</span>
	3000K	7390lm		
	3500K	7900lm		
	4000K	8410lm		

## Quickinfo

2700 K, 3000 K, 3500 K, 4000 K  
 CRI  $\geq$  80, CRI  $\geq$  90, 3 SDCM  
 up to 152 lm/W  
 up to 2330 lm/m  
 L90 @ 50000h  
 DALI-2

## Types

opal



## Colours



## Light distribution



opal



reddot winner 2024



# OPAL

linear inset

**EN** Linear light inset made of plastic; light inset, incl. high power adapter + converter can be installed flexibly and without tools; flush with profile system; equipped with specially computed lenses; homogeneously illuminated, satinised PMMA cover; energy-efficient LEDs with very good colour rendering; energy-efficient LEDs with very good colour rendering

**DE** Linear-Lichteinsatz aus Kunststoff; Lichteinsatz, inkl. High Power Adapter + Konverter, werkzeuglos einsetz- und verschiebbar; bündig im Profilsystem; bestückt mit speziell berechneten Linsen; homogen ausgeleuchtete, satinierte PMMA-Abdeckung; energieeffiziente LEDs mit sehr guter Farbwiedergabe; energieeffiziente LEDs mit sehr guter Farbwiedergabe



continuous  
cover



up to 152 lm/W  
(high efficiency)

## Order options

### COLOUR TEMPERATURE

2700 K CRI ≥ 90	9
3000 K CRI ≥ 90	0
3500 K CRI ≥ 90	2
4000 K CRI ≥ 90	1
2700 K CRI ≥ 80	4
3000 K CRI ≥ 80	5
3500 K CRI ≥ 80	7
4000 K CRI ≥ 80	6

### CONTROL


DALI-2

### LIGHT OPTIC

opal

### MATERIAL COLOUR

<input type="radio"/> traffic white RAL 9016	7
<input checked="" type="radio"/> jet black RAL 9005	8



## OPAL inset



### LIGHT INSET

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
18.2W	2700K	2050lm	1000	0 8 6 - 6 1 1 0  30
	3000K	2330lm		
26.4W	2700K	3070lm	1500	0 8 6 - 6 1 2 0  30
	3000K	3490lm		
33W	2700K	4090lm	2000	0 8 6 - 6 1 3 0  30
	3000K	4660lm		
41W	2700K	5110lm	2500	0 8 6 - 6 1 4 0  30
	3000K	5820lm		
46W	2700K	6140lm	3000	0 8 6 - 6 1 5 0  30
	3000K	6980lm		

## Accessories

### END CAPS

#### TYPE

end caps pair for opal

#### ORDER CODE

0 8 6 - 6 0 9 1 1 1

### COVER

#### TYPE

TYPE	L (mm)	ORDER CODE
continuous opal cover	6000	0 8 6 - 6 0 8 0 6 0 0 0
continuous opal cover	25000	0 8 6 - 6 0 8 2 5 0 0 0
opal cover	999	0 8 6 - 6 0 1 0 0 0 0 0
opal cover	1499	0 8 6 - 6 0 2 0 0 0 0 0
opal cover	1999	0 8 6 - 6 0 3 0 0 0 0 0
opal cover	2498	0 8 6 - 6 0 4 0 0 0 0 0
opal cover	2998	0 8 6 - 6 0 5 0 0 0 0 0

## Quickinfo

2700 K, 3000 K, 3500 K, 4000 K  
 CRI  $\geq$  80, CRI  $\geq$  90, 3 SDCM  
 UGR  $\leq$  19 / 65°  $\leq$  3000 cd/m<sup>2</sup>  
 up to 129 lm/W  
 up to 1940 lm/m  
 L90 @ 50 000 h  
 DALI-2

## Types

microprismatic



1000 / 1500 / 2000 / 2500 / 3000

## Colours



## Light distribution



micropr.



reddot winner 2024




# MICROPRISMATIC

linear inset

**EN** Linear light inset made of plastic; light inset, incl. high power adapter + converter can be installed flexibly and without tools; flush with profile system; completely homogeneously illuminated, microprismatic PMMA cover; for use in offices; energy-efficient LEDs with very good colour rendering

**DE** Linear-Lichteinsatz aus Kunststoff; Lichteinsatz, inkl. High Power Adapter + Konverter, werkzeuglos einsetz- und verschiebbar; bündig im Profilsystem; absolut homogen ausgeleuchtete, mikroprismatische PMMA-Abdeckung; für den Einsatz im Bürobereich; energieeffiziente LEDs mit sehr guter Farbwiedergabe



continuous cover



up to 129 lm/W  
(high efficiency)

## Order options

### COLOUR TEMPERATURE

2700 K CRI ≥ 90	9
3000 K CRI ≥ 90	0
3500 K CRI ≥ 90	2
4000 K CRI ≥ 90	1
2700 K CRI ≥ 80	4
3000 K CRI ≥ 80	5
3500 K CRI ≥ 80	7
4000 K CRI ≥ 80	6

### CONTROL


DALI-2

### LIGHT OPTIC

microprismatic

### MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8



## MICROPRISMATIC inset



### LIGHT INSET UGR ≤ 22

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
18.2 W	3000 K	1710 lm	1000	0 8 6 - 6 1 1 0 :: 30
	4000 K	1940 lm		
26.4 W	3000 K	2560 lm	1500	0 8 6 - 6 1 2 0 :: 30
	4000 K	2910 lm		
33 W	3000 K	3420 lm	2000	0 8 6 - 6 1 3 0 :: 30
	4000 K	3890 lm		
41 W	3000 K	4270 lm	2500	0 8 6 - 6 1 4 0 :: 30
	4000 K	4860 lm		
46 W	3000 K	5120 lm	3000	0 8 6 - 6 1 5 0 :: 30
	4000 K	5830 lm		



### LIGHT INSET UGR ≤ 19

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
8 W	3000 K	768 lm	1000	0 8 6 - 6 2 1 0 :: 30
	4000 K	873 lm		
11.6 W	3000 K	1150 lm	1500	0 8 6 - 6 2 2 0 :: 30
	4000 K	1310 lm		
14.7 W	3000 K	1540 lm	2000	0 8 6 - 6 2 3 0 :: 30
	4000 K	1750 lm		
17.9 W	3000 K	1920 lm	2500	0 8 6 - 6 2 4 0 :: 30
	4000 K	2180 lm		
20.3 W	3000 K	2300 lm	3000	0 8 6 - 6 2 5 0 :: 30
	4000 K	2620 lm		

## Accessories

### END CAPS

TYPE	ORDER CODE
end caps pair for microprismatic	0 8 6 - 6 0 9 1 1 1

### COVER

TYPE	L (mm)	ORDER CODE
continuous microprismatic cover	6000	0 8 6 - 6 0 8 0 6 0 0 P
continuous microprismatic cover	25000	0 8 6 - 6 0 8 2 5 0 0 P
microprismatic cover	999	0 8 6 - 6 0 1 0 0 0 0 P
microprismatic cover	1499	0 8 6 - 6 0 2 0 0 0 0 P
microprismatic cover	1999	0 8 6 - 6 0 3 0 0 0 0 P
microprismatic cover	2498	0 8 6 - 6 0 4 0 0 0 0 P
microprismatic cover	2998	0 8 6 - 6 0 5 0 0 0 0 P

## Quickinfo

2700 K, 3000 K, 3500 K, 4000 K  
 CRI ≥ 80, CRI ≥ 90, 3 SDCM  
 up to 162lm/W  
 up to 3400lm/m  
 L90 @ 50 000h  
 DALI-2

## Types

indirect



low power: 1500 / 3000 / 4500  
 high power: 1000 / 2000

## Colour



## Light distribution



indirect



reddot winner 2024



# INDIRECT

linear inset

**EN** Linear light inset made of plastic; light inset, incl. high power adapter + converter can be installed flexibly and without tools; flush with profile system; with indirect light component for additional accentuation of the ceiling; high quality lens system for maximum, homogeneous ceiling illumination; energy-efficient LEDs with very good colour rendering

**DE** Linear-Lichteinsatz aus Kunststoff; Lichteinsatz, inkl. High Power Adapter + Konverter, werkzeuglos einsetz- und verschiebbar; bündig im Profilsystem; mit indirekter Lichtkomponente für zusätzliche Akzentuierung der Decke; hochwertige Linsenoptik für maximale, homogene Deckenaufhellung; energieeffiziente LEDs mit sehr guter Farbwiedergabe



170° indirect illumination

### Order options

**COLOUR TEMPERATURE** ⚡


2700 K CRI ≥ 90	9
3000 K CRI ≥ 90	0
3500 K CRI ≥ 90	2
4000 K CRI ≥ 90	1
2700 K CRI ≥ 80	4
3000 K CRI ≥ 80	5
3500 K CRI ≥ 80	7
4000 K CRI ≥ 80	6

**CONTROL**

DALI-2

**LIGHT OPTIC**

batwing



### INDIRECT inset



#### INDIRECT BATWING LOW POWER

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
17.7W	2700K	2240lm	1472	0 8 6 - 6 8 2 0 <span style="color: blue;">⚡</span> 30 B
	3000K	2240lm		
	3500K	2400lm		
	4000K	2550lm		
32W	2700K	4480lm	2942	0 8 6 - 6 8 5 0 <span style="color: blue;">⚡</span> 30 B
	3000K	4480lm		
	3500K	4790lm		
	4000K	5100lm		
47W	2700K	6720lm	4412	0 8 6 - 6 8 8 0 <span style="color: blue;">⚡</span> 30 B
	3000K	6720lm		
	3500K	7190lm		
	4000K	7650lm		

#### INDIRECT BATWING HIGH POWER

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
24.3W	2700K	2990lm	982	0 8 6 - 6 8 1 5 <span style="color: blue;">⚡</span> 30 B
	3000K	2990lm		
	3500K	3190lm		
	4000K	3400lm		
43W	2700K	5980lm	1962	0 8 6 - 6 8 3 5 <span style="color: blue;">⚡</span> 30 B
	3000K	5980lm		
	3500K	6390lm		
	4000K	6800lm		

### Accessories



#### MOUNTING ACCESSORIES

TYPE	ORDER CODE
drilling template for indirect inset	0 8 6 - 5 2 1 9 5 1 0

#### INDIRECT EXTENSION

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
2.6W low power	2700K	374lm	245	0 8 6 - 6 8 0 0 <span style="color: blue;">⚡</span> 30 B
	3000K	374lm		
	3500K	399lm		
5.4W high power	4000K	425lm	245	0 8 6 - 6 8 0 5 <span style="color: blue;">⚡</span> 30 B
	2700K	747lm		
	3000K	747lm		
	3500K	799lm		
	4000K	850lm		

max. inset length per driver: low power 4500mm, high power 2000mm without power supply

### Example for extension

1500mm Scope of delivery low power PCBA



Extension by 250mm PCBA (new total length 1750mm)



reddot winner 2024



## NOBA

decorative inset


**EN** Decorative pendant light inset made of aluminium; choice of single lamp, double lamps or triple lamp; light inset, incl. high power adapter + converter can be installed flexibly and without tools; surface polished chrome, brushed aluminium or powder coated; pendant fitting with suspension, incl. feed (black); can be individually shortened; high quality plano-convex glass lens; no multiple shadows; energy-efficient LEDs with very good colour rendering; ceiling mounting rings for multiple positioning of the luminaire in the room available as accessory

**DE** Dekorativer Pendelleuchten-Lichteinsatz aus Aluminium; wahlweise ein-, zwei- oder dreiflämmig; Lichteinsatz, inkl. High Power Adapter + Konverter, werkzeuglos einsetz- und verschiebbar; Oberfläche chrom poliert, Aluminium gebürstet oder pulverbeschichtet; abgependelt mit Pendelabhängung, inkl. Einspeiseleitung (schwarz); beliebig kürzbar; hochwertige plan-konvexe Glaslinse; keine Mehrfachschatten; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Deckenmontageringe für multiple Positionierung der Leuchte im Raum als Zubehör erhältlich

### Quickinfo

2700 K, 3000 K, 3500 K, 4000 K  
 CRI ≥ 90, 2 SDCM  
 up to 111lm/W  
 L80 @ 50 000 h  
 DALI-2

### Types

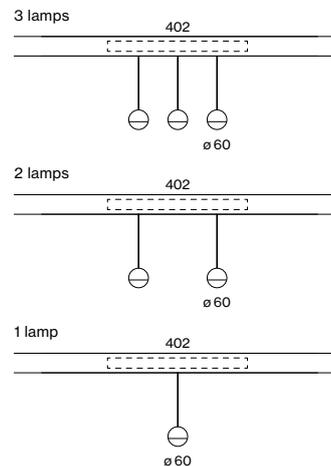


### Colours



### Light distribution



direct



free positioning  
by cable and hook



high quality  
glass lens

### Order options

#### MOUNTING

suspension 2000 mm

#### COLOUR TEMPERATURE

2700K	9
3000K	0
3500K	2
4000K	1

#### CONTROL

DALI-2

#### MATERIAL COLOUR

<input type="checkbox"/> traffic white RAL 9016	7
<input checked="" type="checkbox"/> jet black RAL 9005	8
<input type="checkbox"/> brushed aluminium	6
<input type="checkbox"/> chrome	4
<input type="checkbox"/> gun metal	5
<input type="checkbox"/> brushed brass	3
<input type="checkbox"/> rose gold	9

#### MATERIAL COLOUR ACCESSORIES / DRIVER

<input type="checkbox"/> traffic white RAL 9016	7
<input checked="" type="checkbox"/> jet black RAL 9005	8

#### BEAM ANGLE


wide flood 67°

### NOBA 60




#### DOWNLIGHT 1 LAMP

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14.1W	2700K	1040lm	086-711003
	3000K	1090lm	
	3500K	1140lm	
	4000K	1170lm	



#### DOWNLIGHT 2 LAMPS

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
28.2W	2700K	2080lm	086-711103
	3000K	2180lm	
	3500K	2280lm	
	4000K	2340lm	



#### DOWNLIGHT 3 LAMPS

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
41W	2700K	3120lm	086-711203
	3000K	3270lm	
	3500K	3410lm	
	4000K	3510lm	

### Mounting accessories



#### HOOK ceiling mounted

TYPE	Ø-H (mm)	ORDER CODE
hook	16-30	030-100001



reddot winner 2024



## ARY

decorative inset


**EN** Decorative pendant light inset made of aluminium; choice of single lamp, double lamps or triple lamp; light inset, incl. high power adapter + converter can be installed flexibly and without tools; surface powder coated; pendant fitting with suspension, incl. feed (black or white); can be individually shortened; good glare reduction due to recessed light point plane; incl. high quality lens system; precise radiation characteristics with different beam angles; shades available as accessory in RAL colours velvet beige, madeira brown, kingfisher grey, woodpecker olive, signal white or signal black; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; energy-efficient LEDs with very good colour rendering; ceiling mounting rings for multiple positioning of the luminaire in the room available as accessory

**DE** Dekorativer Pendelleuchten-Lichteinsatz aus Aluminium; wahlweise ein-, zwei- oder dreiflammig; Lichteinsatz, inkl. High Power Adapter + Konverter, werkzeuglos einsetz- und verschiebbar; Oberfläche pulverbeschichtet; abgependelt mit Pendelabhängung, inkl. Einspeiseleitung (schwarz oder weiß); beliebig kürzbar; gute Entblendung durch zurückversetzte Lichtpunktebene; inkl. hochwertiger Linsenoptik; präzise Abstrahlcharakteristik mit verschiedenen Ausstrahlwinkeln; Shades in den RAL Farben velvet beige, madeira brown, kingfisher grey, woodpecker olive, signal white oder signal black als Zubehör erhältlich; mit COB (Chip on Board) Technologie für höchste Effizienz; keine Mehrfachschatten; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Deckenmontageringe für multiple Positionierung der Leuchte im Raum als Zubehör erhältlich

### Quickinfo

2700 K, 3000 K, 3500 K, 4000 K  
CRI ≥ 90, 3 SDCM  
up to 86 lm/W  
L90 @ 50 000 h  
non DIM, DALI-2


### Types



### Colours



### Light distributions



free positioning  
by ring and hook

### Order options

#### MOUNTING

suspension 2000 mm

#### COLOUR TEMPERATURE

2700K	9
3000K	0
3500K	2
4000K	1

#### CONTROL

DALI-2

#### MATERIAL COLOUR

<input type="radio"/> traffic white RAL 9016	7
<input checked="" type="radio"/> jet black RAL 9005	8
<input checked="" type="checkbox"/> special colours*	X

\*cable and driver always in black

#### MATERIAL COLOUR ACCESSORIES / DRIVER

<input type="radio"/> traffic white RAL 9016	7
<input checked="" type="radio"/> jet black RAL 9005	8

#### BEAM ANGLE

medium 25°	M
flood 44°	F

#### SHADE COLOUR

<input type="checkbox"/> velvet beige RAL 085 8010	C
<input type="checkbox"/> madeira brown RAL 050 40 40	T
<input type="checkbox"/> kingfisher grey RAL 230 60 10	L
<input type="checkbox"/> woodpecker olive RAL 10 50 20	G
<input type="checkbox"/> signal white RAL 9003	W
<input type="checkbox"/> signal black RAL 9004	B

### ARY



#### DOWNLIGHT 1 LAMP

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14.1W	2700K	1390lm	086-7300::3■▲
	3000K	1450lm	
	3500K	1520lm	
	4000K	1560lm	



#### DOWNLIGHT 2 LAMPS

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
28.2W	2700K	2780lm	086-7310::3■▲
	3000K	2910lm	
	3500K	3040lm	
	4000K	3130lm	



#### DOWNLIGHT 3 LAMPS


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
41W	2700K	4170lm	086-7320::3■▲
	3000K	4360lm	
	3500K	4560lm	
	4000K	4690lm	

### Mounting accessories



TYPE	Ø-H (mm)	ORDER CODE
ring ceiling mounted	50-88	050-051021■
hook	18-58	050-051031■

### Optical accessories



#### SHADE

TYPE	Ø-H (mm)	ORDER CODE
cone 300	300-188	049-593311□
cone 400	400-253	049-593411□
cone 500	500-318	049-593511□

only for one lamp

LUMINOUS FLUX value calculated for medium

**Quickinfo**

sensor  
 ESSENTIAL, SENSE  
 DALI-2

**Type**

sensor



41

**Inset colours****Sensors**

essen- sense  
 tial



reddot winner 2024

**SENSOR**

inset

<sup>EN</sup> Sensor inset; choice of ESSENTIAL or SENSE; ESSENTIAL: brightness and presence sensor; SENSE: brightness, presence, temperature, humidity, air quality and noise level sensor; flush with profile system

<sup>DE</sup> Sensor-Einsatz; wahlweise ESSENTIAL oder SENSE; ESSENTIAL: Helligkeits- und Anwesenheitssensor; SENSE: Helligkeits-, Anwesenheits-, Temperatur-, Luftfeuchtigkeits-, Luftqualitäts- und Lärmpegelsensor; bündig im Profilsystem

### Order options

#### CONTROL


DALI-2

#### INSET COLOUR



○ traffic white RAL 9016 7

● jet black RAL 9005 8



### SENSOR inset



#### ESSENTIAL SENSOR

TYPE  
brightness & presence

ORDER CODE

086-521811



#### SENSE SENSOR

TYPE  
brightness, presence, temperature,  
sound pressure, humidity, CO<sub>2</sub>

ORDER CODE

086-521812