


# MINO 40 reflector

surface

042-111613GB



|                |
|----------------|
| Projekt / Typ  |
| Notizen        |
| Anzahl / Datum |

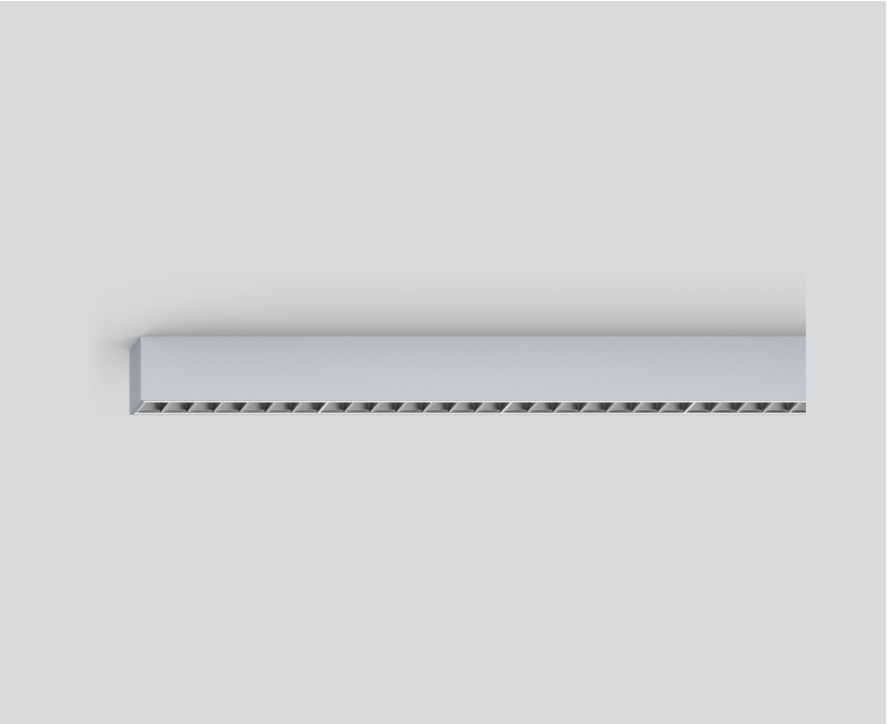

|          |        |          |                          |          |        |
|----------|--------|----------|--------------------------|----------|--------|
| 220-240V | X-PERT | UGR ≤ 19 | cd/m <sup>2</sup> ≤ 1500 | CRI ≥ 90 | X-PERT |
|----------|--------|----------|--------------------------|----------|--------|

## Allgemein

|                             |
|-----------------------------|
| Decke , Aufbau              |
| Grau , RAL9006 <sup>1</sup> |
| Reflektor Dunkles Chrom     |
| 2370 lm/m                   |
| IP20                        |
| 7090 lm                     |

## LED

|  |
|--|
| 4000 K   |
| CRI ≥ 90   |
| L90 / 50000 h  |
| initial MacAdam ≤ 3 SDCM   |
| R <sub>g</sub> : 99 , R <sub>f</sub> : 92 , R <sub>(1-15)</sub> : 90 |
| MR 0.81  |
| MDER 0.74  |

## Optisch

|   |
|---|
| Reflector                                 |
| Symmetric                                 |
| UGR < 19 , ≥ 65° < 1500 cd/m <sup>2</sup> |
| PstLM ≤ 1.0 <sup>2</sup>                  |
| SVM ≤ 0.4 <sup>2</sup>                    |

## Elektrisch


|              |
|--------------|
| DALI-2       |
| 67 W         |
| SK1 220-240V |
| 106 lm/W     |
| 22 W/m       |

## Abmessungen

|                |
|----------------|
| length 3008 mm |
| width 40 mm    |
| Höhe 65 mm     |

<sup>1</sup> RAL Code  
<sup>2</sup> Wert von umgebendem Produkt bei Vollast (ungedimmt)

## Lichtverteilung



## Produktskizze



## Montage-anleitung



## Beleuchtungs-rechner

