

050-014303XS



## Notizen

Anzahl / Datum

Decke , Track

schwenkbar max. 90°

Rotierbarkeit 360°

Spezialfarben

IP20

1330 lm

**LED**

3000 K

CRI  $\geq 90$

L80 / 50000 h

initial MacAdam  $\leq 2$  SDCM

R<sub>g</sub>: 99 , R<sub>f</sub>: 90 , R<sub>{1-15}</sub>: 87

MR 0.6

MDER 0.54

## Optisch

spot

Ausstrahlwinkel  $14^\circ$

## Elektrisch

## DALI-2 Einzelsteuerung

12.7 W

SK3 48V

105 lm/W


1 DALI Addr.

## Abmessungen

Durchmesser 55 mm

Höhe 100 mm


0.3 kg

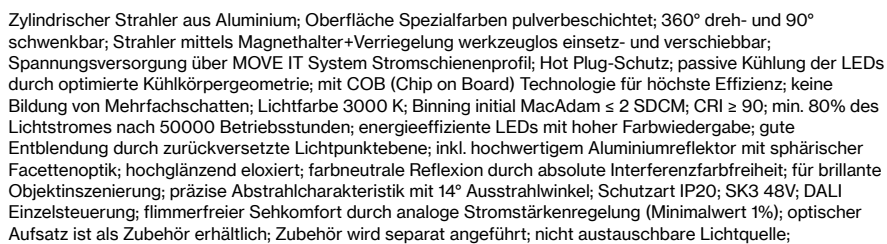

## spot 14°

| h (m) | E0° (lx) | ø (m) |
|-------|----------|-------|
| 1     | 11000    | 0.25  |
| 2     | 2800     | 0.51  |
| 3     | 1200     | 0.76  |
| 4     | 700      | 1.01  |
| 5     | 400      | 1.27  |

## Produktskizze



## Montage- anleitung



## Beleuchtungs- rechner



19.10.2024