

# PABLO focus

180-5221138



Project / Type

Notes

Count / Date



## General

Ceiling , Track

tilt max 310°

rotation 360°

black , RAL 9005 <sup>1</sup>

IP20

754<sup>2</sup>-1280<sup>3</sup> lm

## LED

4000 K

CRI ≥ 95

L90 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 98 , R<sub>f</sub>: 91 , R<sub>(1-15)</sub>: 95

MR 0.85

MDER 0.77

## Optical

focus


beam angle 17°<sup>2</sup>-47°<sup>3</sup>

PstLM ≤ 1.0<sup>3</sup> 2 4

SVM ≤ 0.4<sup>3</sup> 2 4

Track light made of die-cast aluminium; surface black powder coated; 360° rotatable and 310° tiltable; converter installed in aluminium spotlight housing; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 95; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality plano-convex glass lens; precise object focusing through adjustable lens; adjustable beam angle of 17° - 47°; focusing by means of rubberised adjusting ring on the spotlight head; degree of protection IP20; PC1; 220-240 V; adapter for toolless insertion or movement on a variety of 3-phase power tracks; adapter fixation without tools by means of knurled screw; incl. DALI-2 converter; point outlet, either in surface mounted housing or recessed housing, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution

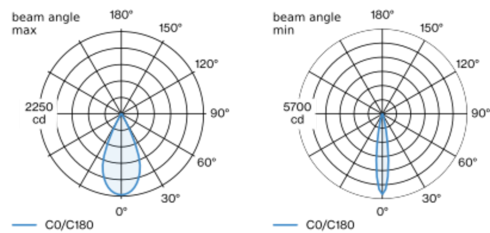


focus 47°

h (m)	E0° (lx)	ø (m)
1	2210	0.87
2	550	1.74
3	250	2.60
4	140	3.47
5	90	4.34

focus 17°

h (m)	E0° (lx)	ø (m)
1	5380	0.30
2	1350	0.60
3	600	0.89
4	340	1.19
5	220	1.49

## Product drawing



## Electrical

DALI-2

220-240 V

system 23.0 W

system 33<sup>2</sup>-56<sup>3</sup> lm/W<sup>5</sup>

PC1

1 DALI Addr.

## Physical

diameter 70 mm

height 106 mm

0.9 kg

tool-free fixation

<sup>1</sup> RAL code <sup>2</sup> beam angle min <sup>3</sup> beam angle max  
<sup>4</sup> Value of containing product at full load (undimmed)  
<sup>5</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

## Installation instructions



## Lighting calculator



[180-5221138] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.  
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com