

# LINEA opal / 2 spots

wall

058-6174547DH



Project / Type

Notes

Count / Date



## General

Wall , Surface

tilt max 89°

white , RAL 9010 <sup>1</sup>

IP20

282 lm

## LED

3000 K

CRI ≥ 90

L80 / 50000 h<sup>2</sup>-L85 / 50000 h<sup>3</sup>

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 100<sup>2</sup>-99<sup>3</sup> , R<sub>f</sub>: 91 , R<sub>f(1-15)</sub>: 88<sup>2</sup>-89<sup>3</sup>

MR 0.59<sup>2</sup>-0.61<sup>3</sup>

MDER 0.53<sup>2</sup>-0.55<sup>3</sup>

## Optical

flood<sup>2</sup>-opal (lambertsch)<sup>3</sup>

beam angle 23°


PstLM ≤ 1.0<sup>2</sup> <sup>3</sup> <sup>4</sup>

SVM ≤ 0.4<sup>2</sup> <sup>3</sup> <sup>4</sup>

High Performance Opal

Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface white powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; 2x JUST 26 spotlight module 2,2 W / 141 lm / 3000 K (1x left, 1x right), incl. switch; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution

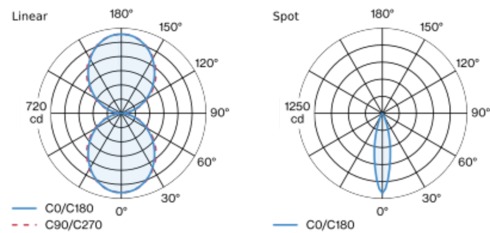


— C0/C180

--- C90/C270

— C0/C180

## Product drawing



## Electrical

DALI-2 / switch (only spotlights)

220-240 V

system 4.5<sup>2</sup>-35<sup>3</sup> W

system 63<sup>2</sup>-99<sup>3</sup> lm/W<sup>5</sup>

PC1

1 DALI Addr.

## Physical

length 1410 mm

width 40 mm

height 100 mm

<sup>1</sup> RAL code <sup>2</sup> Spot <sup>3</sup> Linear  
<sup>4</sup> Value of containing product at full load (undimmed)  
<sup>5</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

## Installation instructions

