

LENO jut-out

semi-recessed / surface system

051-8218537J 051-8920248



Project / Type

Notes

Count / Date



RG0
IEC 62471

220-240V

IP20
IP40

no sun icon

X-PERT

General

Ceiling / Wall , Surface¹-Semi-Recessed²

black , RAL9005³

jet black

1930 lm/m

front IP20¹-IP40² , back IP20

4700 lm

LED

3000 K

CRI ≥ 80

L90 / 50000 h

photobio. safety RG 0 - no Risk

initial MacAdam ≤ 3 SDCM

MR 0.54

MDER 0.49

Optical

Jut-Out

opal (lambertsch)

PstLM ≤ 1.0⁴

SVM ≤ 0.4⁴

Low profile recessed mounted luminaire, 15 mm visible height or low profile surface mounted luminaire, 28 mm total height; converter integrated into luminaire housing; suitable for wall or ceiling mounting; suitable for installation in primed or exposed concrete, in plasterboard constructions and in plastered walls or ceilings; for continuous lighting systems; surface black powder coated; fall-safe light inset made of extruded aluminium profile, can be inserted in the canal without tools by magnetic holders; side coupled light directed downward through LGP (LIGHT GUIDING PRISM) body and high efficiency reflector; HPO (High Performance Opal) cover for uniform illumination; jut-out cover; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; PC1 220-240V; photobiological safety according to IEC 62471 risk group RG 0 - no Risk; internal wiring in light halogen free; incl. DALI-2 converter; accessories are listed separately; light source not replaceable; control gear replaceable by an authorized professional;

Electrical

DALI-2

system 38 W

PC1 220-240V

system 124 lm/W⁵

1 DALI Addr.

16 W/m

Physical


length 2438 mm

width 89 mm


height 38 mm

5.5 kg

Light distribution

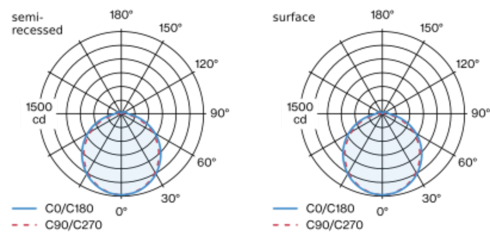

Product drawing



Cutout

length 2451 mm

width 70 mm

min. ceiling thickness 12.5 mm

recessed depth 13 mm

¹ surface ² semi-recessed ³ RAL code
⁴ Value of containing product at full load (undimmed)
⁵ incl. optical losses and the efficiency of the operating device (converter)

Installation instructions

