

SASSO 100 round adjustable trim soft acoustic ceiling

048-2720019M 048-2796318 002-90780



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed

tilt max 30°

rotation 360°

gold , RAL260-M ¹

Mounting set Traffic black

front IP40 , back IP20

1990 lm

LED

3000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 99 , R_r: 90 , R_{t1-15}: 87

MR 0.6

MDER 0.54

Optical

medium

beam angle 32°

UGR < 16 , ≥65° <3000 cd/m²

Round recessed spotlight in die-cast aluminium; 1 lamp; surface gold; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim jet black; for installation in soft acoustic ceilings; suitable for ceiling thickness of 25-40 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 32° beam; UGR ≤ 16; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 3000 cd/m²; degree of protection from below IP40 (from above IP20); PC2 220-240V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Electrical

non DIM

system 26.7 W

inset 22.7 W

36 Vf


650 mA

PC2 220-240V


system 75 lm/W²

inset 88 lm/W³

Light distribution



Product drawing

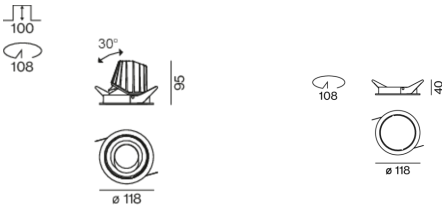

Physical

with trim for acoustic ceiling

diameter 114 mm

height 95 mm

0.45 kg

Cutout

diameter 108 mm

min. ceiling thickness 25 mm

max. ceiling thickness 40 mm

recessed depth 100 mm

¹ RAL code

² incl. optical losses and the efficiency of the operating device (converter)

³ incl. optical losses

Installation instructions

Lighting calculator

