

SASSO 100 round adjustable

trim 2 lamps

048-2720014W 048-2798317 002-90780



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

tilt max 30°

rotation 360°

matt silver

Mounting set traffic white

front IP40 , back IP20

4820 lm

LED

3000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 99 , R_r: 90 , R_{t(1-5)}: 87

MR 0.6

MDER 0.54

Optical

wide flood

beam angle 60°

≥65° <3000 cd/m²

Electrical

non DIM

220-240 V

system 52 W

inset 22.7 W

36 Vf

650 mA

total insets 45 W

PC2

system 93 lm/W¹

inset 106 lm/W¹

Physical

trim

length 218 mm

width 118 mm

height 95 mm

0.56 kg

Cutout

diameter 105 mm

length 205 mm

width 105 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 100 mm

Round recessed spotlight in die-cast aluminium; 2 lamps; surface matt silver; 360° rotatable and 30° tilttable; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim traffic white; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 60° beam; degree of protection from below IP40 (from above IP20); PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

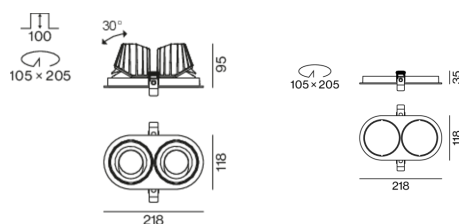

¹ incl. optical losses and the efficiency of the operating device (converter)

SASSO 100 round adjustable

trim 2 lamps

048-2720014W 048-2798317 002-90780



Project / Type

Notes

Count / Date

Installation instructions



Lighting calculator

