

# SASSO 100 square downlight

trimless

048-2710917W 048-2797117 002-90766



Project / Type	
Notes	
Count / Date	



## General

Ceiling , Recessed
white , RAL 9016 <sup>1</sup>
Mounting set traffic white
front IP44 , back IP20
1690 lm
fixture 111 lm/W <sup>2</sup>

## LED

2700 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R <sub>g</sub> : 97 , R <sub>f</sub> : 91 , R <sub>(1-15)</sub> : 87
MR 0.52
MDER 0.47

## Optical

wide flood
beam angle 65°
PstLM ≤ 1.0 <sup>3</sup>
SVM ≤ 0.4 <sup>3</sup>

## Electrical

non DIM
220-240 V
system 17.9 W
fixture 15.2 W
36 Vf
450 mA
PC2

## Physical


trimless
length 105 mm
width 105 mm
height 75 mm
0.49 kg

## Cutout


length 106 mm
width 106 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 80 mm

Recessed square spotlight in die-cast aluminium; 1 lamp; surface white; installation without tools in mounting set due to patented ball catch system; square installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 65° beam; degree of protection from below IP44 (from above IP20); PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

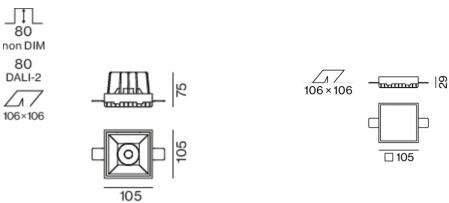

<sup>1</sup> RAL code  
<sup>2</sup> incl. consideration of optical losses & internal control unit losses  
<sup>3</sup> Value of containing product at full load (undimmed)

## Installation instructions



## Lighting calculator

