

# SASSO 100 round downlight

trimless exposed concrete

048-2700214F 048-2795210 002-90780



Project / Type \_\_\_\_\_


Notes \_\_\_\_\_

Count / Date \_\_\_\_\_




Round recessed spotlight in die-cast aluminium; 1 lamp; surface matt silver; installation without tools in mounting set due to patented ball catch system; concrete housings for exposed concrete ceilings; for trimless installation; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3500 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 44° beam; UGR  $\leq 16$ ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65°  $\leq 3000$  cd/m<sup>2</sup>; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

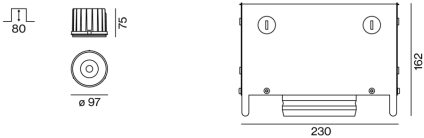

## General

Ceiling , Recessed  
rotation 360°  
matt silver  
Mounting set white aluminium  
front IP44 , back IP20  
2360 lm

## LED

3500 K  
CRI  $\geq 90$   
L80 / 50000 h  
initial MacAdam  $\leq 2$  SDCM  
R<sub>g</sub>: 99 , R<sub>f</sub>: 90 , R<sub>t(1-15)</sub>: 89  
MR 0.7  
MDER 0.64

## Optical

flood  
beam angle 44°  
UGR < 16 ,  $\geq 65^\circ$  <3000 cd/m<sup>2</sup>

## Electrical

non DIM  
system 26.7 W  
inset 22.7 W  
36 Vf  
650 mA  
PC2 220-240V  
system 88 lm/W<sup>1</sup>  
inset 104 lm/W<sup>2</sup>

## Physical

trimless for exposed concrete ceiling  
length 230 mm  
width 230 mm  
height 162 mm  
2.58 kg

## Cutout

recessed depth 80 mm

<sup>1</sup> incl. optical losses and the efficiency of the operating device (converter)  
<sup>2</sup> incl. optical losses

## Installation instructions



## Lighting calculator

