



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Track _____

tilt max 310° _____

rotation 360° _____

white , RAL9016 ¹ _____

IP20 _____

1400 lm _____

LED

3000 K _____

CRI ≥ 95 _____

L90 / 50000 h _____

initial MacAdam ≤ 2 SDCM _____

R_g: 99 , R_f: 94 , R_{t(1-15)}: 96 _____

MR 0.66 _____

MDER 0.6 _____

Optical

medium _____

beam angle 24° _____

PstLM ≤ 1.0 ² _____

SVM ≤ 0.4 ² _____

Track light made of die-cast aluminium; surface white powder coated; 360° rotatable and 310° tiltable; converter installed in aluminium spotlight housing; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 95; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; including high quality aluminium reflector with spherical reflector; high gloss anodised; neutral colour reflection through absolute freedom from interference colour; for brilliant object staging; precise radiation characteristic with 24° beam; installed and exchanged without tools; optical attachments available as accessories; degree of protection IP20; PC1 220-240V; adapter for toolless insertion or movement on a variety of 3-phase power tracks; adapter fixation without tools by means of knurled screw; incl. converter, dimmable with integrated potentiometer; point outlet, either in surface mounted housing or recessed housing, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Electrical

DIM POTI _____

system 22.9 W _____

PC1 220-240V _____

system 61 lm/W³ _____

inset 72 lm/W⁴ _____

Physical


diameter 70 mm _____

height 98 mm _____

0.9 kg _____

tool-free fixation _____

Light distribution




| medium 24° | | |
|------------|----------|-------|
| h (m) | EO° (lx) | ø (m) |
| 1 | 5870 | 0.42 |
| 2 | 1470 | 0.84 |
| 3 | 650 | 1.27 |
| 4 | 370 | 1.69 |
| 5 | 230 | 2.11 |

Product drawing



¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)
⁴ incl. optical losses

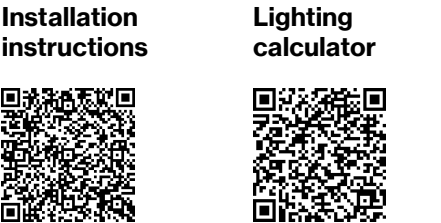



Project / Type

Notes

Count / Date

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|------------------------------|--------|-------------------|---------------------------------|--------|
| LLMF | 0.97 | 0.95 | 0.93 | 0.91 | 0.9 |
| LSF | 1 | 1 | 1 | 1 | 1 |
| MF | LMF × RSMF × LLMF × LSF | | RSMF ^a | Room Surface Maintenance Factor | |
| MF | Maintenance Factor | | LLMF | Lamp Lumens Maintenance Factor | |
| LMF ^a | Luminaire Maintenance Factor | | LSF | Lamp Survival Faktor | |

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 31 |
| B13 | 40 |
| B16 | 50 |
| B20 | 62 |
| B25 | 78 |
| C10 | 52 |
| C13 | 67 |
| C16 | 85 |
| C20 | 104 |
| C25 | 130 |

Mounting accessories

RECESSED HOUSING

| TYPE | COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|--------------|---------------|--------|-------------------|
| point outlet | traffic white | 151 | 186-072277 |
| point outlet | jet black | 151 | 186-072278 |



SURFACE HOUSING

| TYPE | COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|--------------|---------------|--------|-------------------|
| point outlet | traffic white | 120 | 186-072287 |
| point outlet | jet black | 120 | 186-072288 |



Optical accessories

SNOOT

| COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|-----------|--------|-------------------|
| jet black | 62 | 080-5900008 |



HONEYCOMB LOUVER

| COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|-----------|--------|-------------------|
| jet black | 61 | 080-5900018 |

