

# MIRA 200 round

trim


852-94236370



Project / Type

Notes

Count / Date

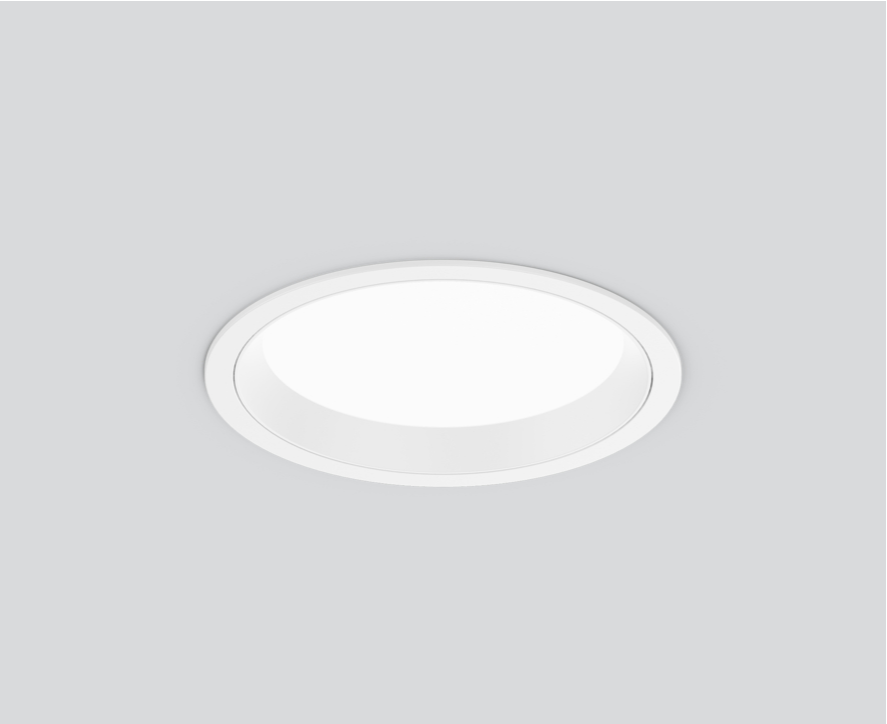

## General

Ceiling , Recessed

white , RAL9010 <sup>1</sup>

front IP54 , back IP20

3200 lm

## LED

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 98 , R<sub>f</sub>: 90 , R<sub>(1-15)</sub>: 88

MR 0.76

MDER 0.69

## Optical

Opal

opal (lambertsch)

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

## Electrical

DALI-2

no emergency light

system 27.9 W

PC2 220-240V

system 115 lm/W<sup>3</sup>

1 DALI Addr.

## Physical

trim

diameter 200 mm

height 53 mm

## Cutout

diameter 190 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 90 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)

## Light distribution



## Product drawing



## Installation instructions



## Lighting calculator

