


L2

MOVE IT 45

090-9L2D3AB001




Project / Type	
Notes	
Count / Date	

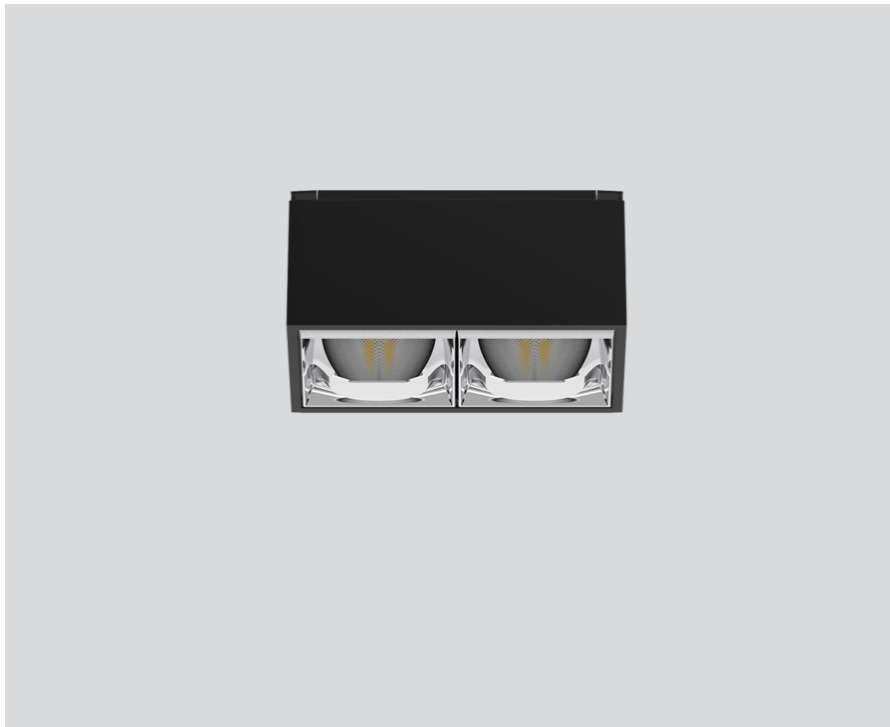

Linear light inset made of aluminium; surface anodised black; light inset can be installed and moved without tools by means of magnetic holders+locking; flush with profile system; power supplied via MOVE IT system track profile; hot plug protection; equipped with two wallwasher light elements; asymmetrical light distribution with precise radiation characteristic; high quality reflector with micro-faceted, aluminum-vaporised surface; Reflector chrome; passive cooling of the LEDs through improved heat sink geometry; light colour: tunable white diodes (2700-5000 K); binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80 ; min. 80% of luminous flux after 50000 operating hours; energy-efficient high power LEDs with very good colour rendering; degree of protection IP20; PC3; 48 V; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); light source not replaceable;

Light distribution



Product drawing



General

Ceiling , Track	
black , RAL 9005 ¹	
Reflector chrome	
IP20	
372 lm	
optical inset 87 lm/W ²	

LED

tunable white	
2700 K - 5000 K	
CRI ≥ 80	
L80 / 50000 h	
initial MacAdam ≤ 3 SDCM	
MR 0.55	
MDER 0.5	

Optical

wallwasher	
PstLM ≤ 1.0 ³	
SVM ≤ 0.4 ³	

Electrical

DALI-2 DT8	
48 V	
fixture 5.0 W	
optical inset 4.3 W	
PC3	
1 DALI Addr.	

Physical

length 81 mm	
width 43 mm	
height 48 mm	
0.2 kg	

¹ RAL code
² OPTICAL INSET: incl. consideration of optical losses
³ Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

