

L2

MOVE IT 45


090-9L263RBB01



Project / Type

Notes

Count / Date

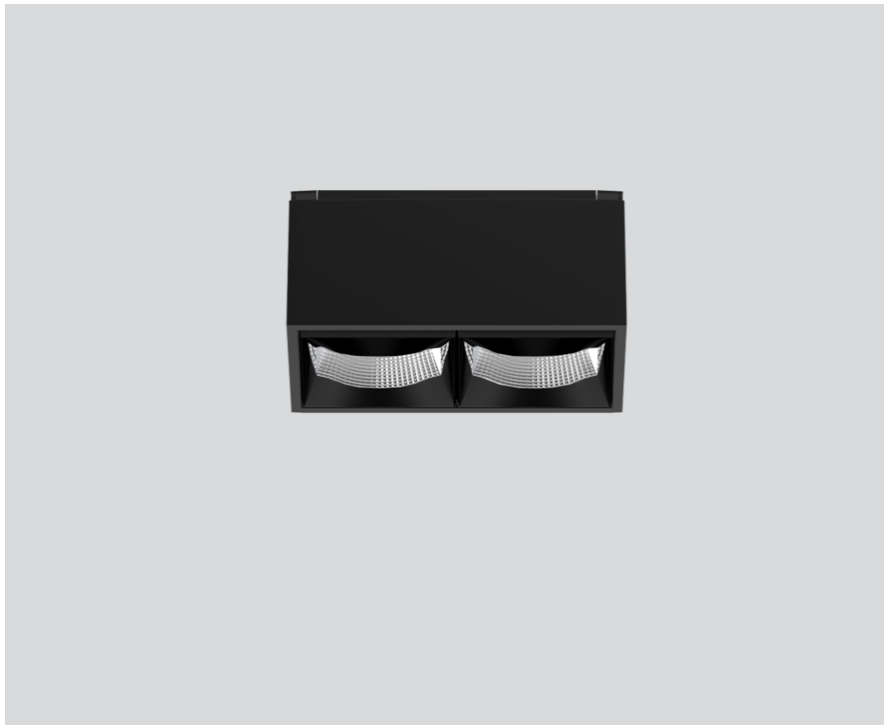

General

Ceiling , Track

black , RAL9005 ¹

Reflector black

IP20

663 lm

LED

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 102 , R_f: 93 , R_{f(1-15)}: 92

MR 0.81

MDER 0.74

Optical

rectangular

beam angle 30°x67°

$\geq 65^\circ$ <3000 cd/m²

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

DALI-2

system 6.8 W

PC3 48V

system 98 lm/W³

1 DALI Addr.

Physical

length 81 mm

width 43 mm

height 48 mm

0.2 kg

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)


Installation instructions



Lighting calculator



Light distribution



Product drawing



[*090-9L263RBB01*] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

21.11.2024