

L1

MOVE IT 45


090-9L153FBB01



Project / Type

Notes

Count / Date

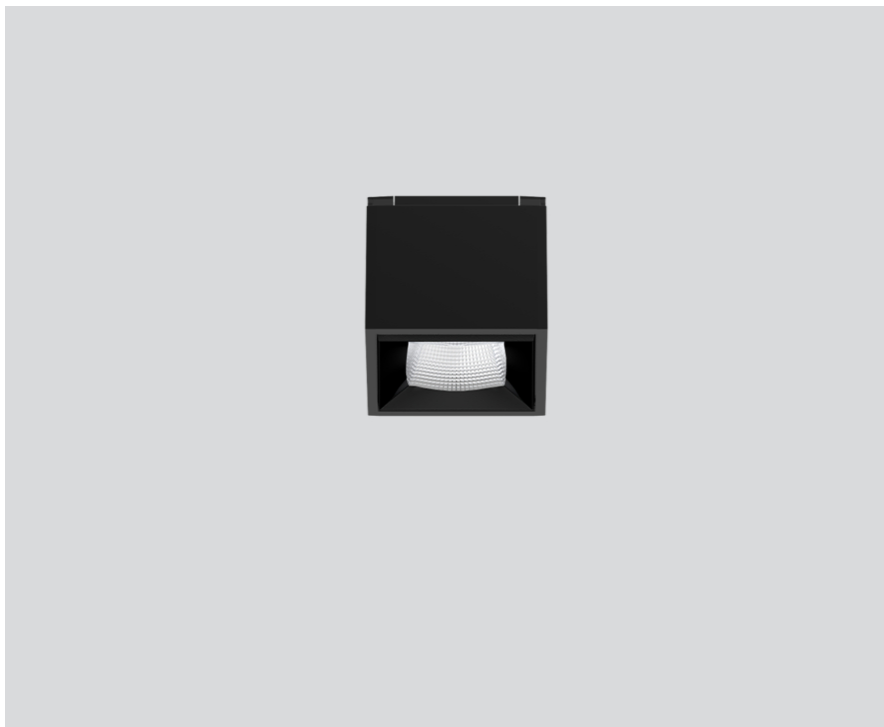

### General

Ceiling , Track

black , RAL9005 <sup>1</sup>

black

IP20

338 lm

### LED

3000 K

CRI  $\geq$  90

L80 / 50000 h

initial MacAdam  $\leq$  3 SDCM

R<sub>g</sub>: 100 , R<sub>f</sub>: 92 , R<sub>f(1-15)</sub>: 91

MR 0.64

MDER 0.58

### Optical

flood square

beam angle 56°

UGR  $<$  19 ,  $\geq 65^\circ$   $<$  1500 cd/m<sup>2</sup>

PstLM  $\leq$  1.0 <sup>2</sup>

SVM  $\leq$  0.4 <sup>2</sup>

### Electrical

DALI-2

system 3.4 W

PC3 48V

system 99 lm/W<sup>3</sup>

1 DALI Addr.

### Physical

length 43 mm

width 43 mm

height 48 mm


0.1 kg

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)

Linear light inset made of aluminium; surface anodised black; light inset can be installed and moved without tools by means of magnetic holders+locking; flush with profile system; power supplied via MOVE IT system track profile; hot plug protection; equipped with a flood square light element; symmetrical light distribution with precise radiation characteristic, beam angle 56°; high quality reflector with micro-faceted, aluminum-vaporised surface; UGR  $\leq$  19; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65°  $\leq$  1500 cd/m<sup>2</sup>; passive cooling of the LEDs through improved heat sink geometry; light colour 3000 K; binning initial MacAdam  $\leq$  3 SDCM; CRI  $\geq$  90; min. 80% of luminous flux after 50000 operating hours; energy-efficient high power LEDs with very good colour rendering; degree of protection IP20; PC3 48V; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); light source not replaceable;

### Light distribution



### Product drawing



### Installation instructions



### Lighting calculator

