

UNICO Q9 basic

trimless


090-7Q951E0B21 090-7Q90100



Project / Type

Notes

Count / Date

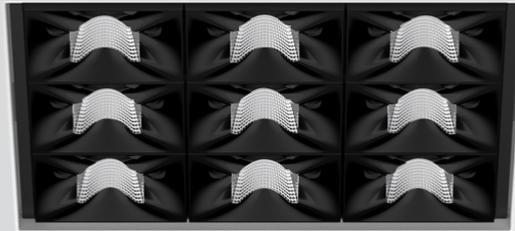

General

Ceiling , Recessed

black reflector

IP20

2650 lm

LED

3000 K

CRI \geq 90

L90 / 50000 h

initial MacAdam \leq 3 SDCM

R_g: 100 , R_f: 92 , R₍₁₋₁₅₎: 91

MR 0.64

MDER 0.58

Optical

medium square

beam angle 32°

UGR < 10 , \geq 65° <3000 cd/m²

Electrical

non DIM

220-240 V

system 29.9 W

system 89 lm/W¹

PC2

Physical

trimless

length 122 mm

width 122 mm

height 51 mm

0.83 kg

Cutout

length 130 mm

width 130 mm


min. ceiling thickness 12.5 mm

max. ceiling thickness 25 mm


recessed depth 90 mm

¹ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Light distribution



Product drawing

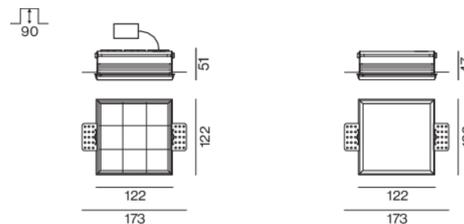

Installation instructions



Lighting calculator

