

# MUSE BAFFLE acoustic


suspended  
091-101111G



Project / Type


Notes

Count / Date

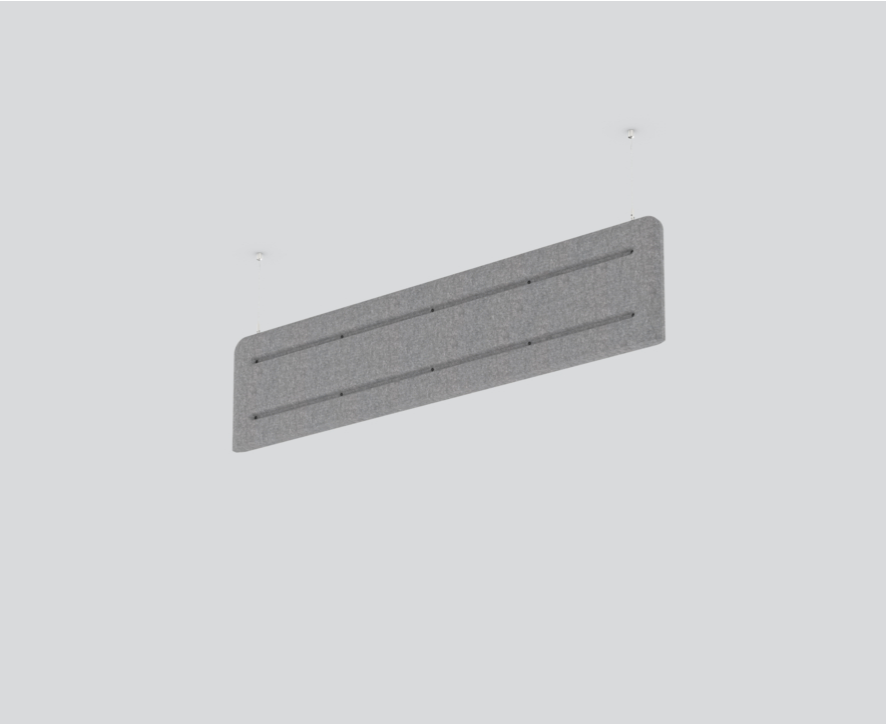

Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of 50% recycled PET; high quality visual and tactile surface, felt grey; colour may deviate; constructed of 2 shells to form cavities that improve acoustic performance; large sound absorbing surface; pendant fitting with 1500mm cable suspension; toolless suspension height adjustment of the acoustic element;

## Product drawing



**General**  
Ceiling , Suspended  
felt grey

**Physical**  
cable 1500 mm  
length 1600 mm  
width 46 mm  
height 380 mm  
2.4 kg

**Acoustics**  
Alpha w ( $\alpha_w$ ) up to 0.45 <sup>1</sup>  
SAC (sound absorption class) up to D <sup>1</sup>  
NRC up to 0.55 <sup>1</sup>  
SAA up to 0.55 <sup>1</sup>

<sup>1</sup> Alpha w, SAC, NRC, SAA refer to the best result of the entire product family

## Installation instructions



# MUSE BAFFLE acoustic

suspended  
091-101111G



Project / Type

Notes

Count / Date

## Equivalent sound absorption area ( $A_{eq}$ )

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.1	0.2	0.57	0.93	0.97	0.93

## Sound absorption coefficient ( $\alpha_p$ )

