


L4

MOVE IT 45

090-9L4D3AB002



Project / Type	
Notes	
Count / Date	

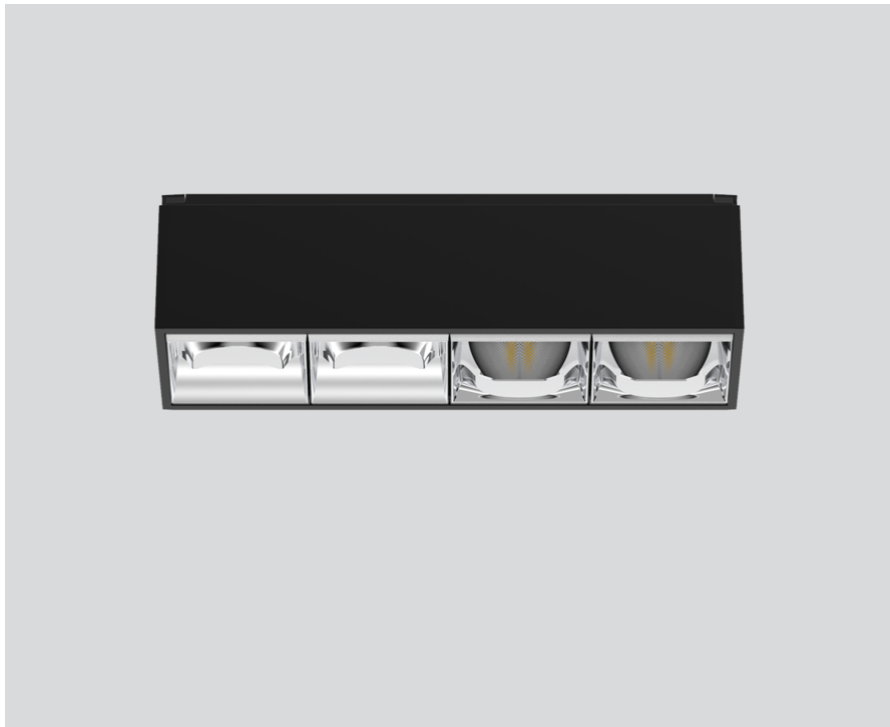

General

Ceiling , Track	
black , RAL9005 ¹	
Reflector chrome	
IP20	
745 lm	

LED

tunable white	
2700 K - 5000 K	
CRI ≥ 80	
L80 / 50000 h	
initial MacAdam ≤ 3 SDCM	
MR 0.55	
MDER 0.5	

Optical

wallwasher	
PstLM ≤ 1.0 ²	
SVM ≤ 0.4 ²	

Electrical


DALI-2 DT8	
system 10.1 W	
PC3 48V	
system 74 lm/W ³	
1 DALI Addr.	

Physical


length 156 mm	
width 43 mm	
height 48 mm	
0.4 kg	

Linear light inset made of aluminium; surface anodised black; light inset can be installed and moved without tools by means of magnetic holders+locking; flush with profile system; power supplied via MOVE IT system track profile; hot plug protection; equipped with two wallwasher light elements 180° + two wallwasher light elements 0°; asymmetrical light distribution with precise radiation characteristic; high quality reflector with micro-faceted, aluminum-vaporised surface; Reflector chrome; passive cooling of the LEDs through improved heat sink geometry; light colour: tunable white diodes (2700-5000 K); binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80; min. 80% of luminous flux after 50000 operating hours; energy-efficient high power LEDs with very good colour rendering; degree of protection IP20; PC3 48V; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); light source not replaceable; NOT suitable for MOVE IT 45 set;

Light distribution



Product drawing



¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)

Installation instructions



Lighting calculator





Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.93	0.89	0.85	0.81
LSF	1	1	1	1	1

MF

MF

LMF^a

LMF × RSMF × LLMF × LSF

Maintenance Factor

Luminaire Maintenance Factor

RSMF^a

LLMF

LSF

Room Surface Maintenance Factor

Lamp Lumens Maintenance Factor

Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.