

# UNICO L6 basic

trimless

090-7L653C0B21 090-7L60100



Project / Type
Notes
Count / Date



## General

Ceiling , Recessed
black reflector
IP20
1950 lm

## LED

3000 K
CRI $\geq 90$
L90 / 50000 h
initial MacAdam $\leq 3$ SDCM
R <sub>g</sub> : 100 , R <sub>f</sub> : 92 , R <sub>f(1-15)</sub> : 91
MR 0.64
MDER 0.58

## Optical

flood round
beam angle 49°
UGR $< 16$ , $\geq 65^\circ$ $< 3000$ cd/m <sup>2</sup>
PstLM $\leq 1.0$ <sup>1</sup>
SVM $\leq 0.4$ <sup>1</sup>

## Electrical

DALI-2
220-240 V
system 18.6 W
system 105 lm/W <sup>2</sup>
PC2


## Physical

trimless
length 235 mm
width 47 mm
height 51 mm
0.7 kg


## Cutout

length 240 mm
width 50 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

## Light distribution



## Product drawing

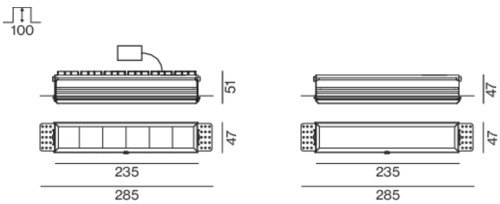

<sup>1</sup> Value of containing product at full load (undimmed)  
<sup>2</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

## Installation instructions



## Lighting calculator

