

UNICO Q1basic

trimless


090-7Q163E0021 090-7Q10100



Project / Type

Notes

Count / Date

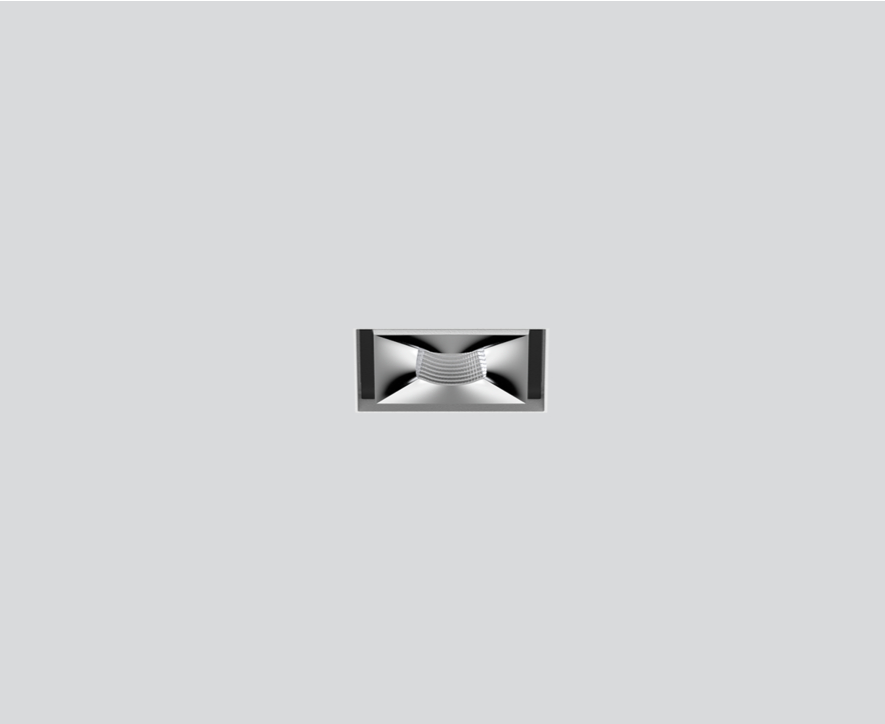

General

Ceiling , Recessed

chrome reflector

IP20

399 lm

LED

4000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 102 , R_f: 93 , R₍₁₋₁₅₎: 92

MR 0.81

MDER 0.74

Optical

medium square

beam angle 32°

UGR < 10

PstLM ≤ 1.0 ¹

SVM ≤ 0.4 ¹

Electrical

DALI-2

220-240 V

system 6.0 W

system 67 lm/W²

PC2

Physical

trimless

length 47 mm

width 47 mm

height 51 mm

0.27 kg

Cutout

length 50 mm


width 50 mm

min. ceiling thickness 12.5 mm


max. ceiling thickness 25 mm

recessed depth 150 mm

Light distribution



Product drawing

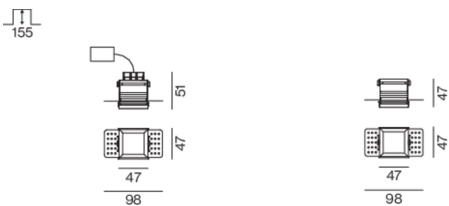

¹ Value of containing product at full load (undimmed)
² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions



Lighting calculator

