

UNICO L6 basic

trimless

090-7L641C0021 090-7L60100



Project / Type
Notes
Count / Date



General

Ceiling , Recessed
chrome reflector
IP20
1830 lm

LED

2700 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 101 , R _r : 91 , R ₍₁₋₅₎ : 89
MR 0.56
MDER 0.51

Optical

flood round
beam angle 49°
UGR ≤ 16 , ≥65° <3000 cd/m ²
PstLM ≤ 1.0 ¹
SVM ≤ 0.4 ¹

Electrical

non DIM
220-240 V
system 18.6 W
system 98 lm/W ²
PC2


Physical

trimless
length 235 mm
width 47 mm
height 51 mm
0.7 kg


Cutout

length 240 mm
width 50 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

Light distribution



Product drawing

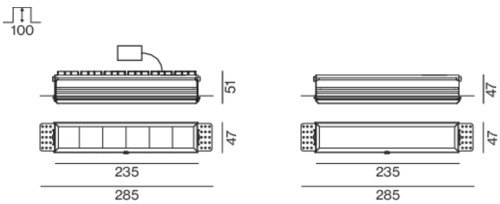

¹ Value of containing product at full load (undimmed)
² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions



Lighting calculator

