

UNICO L4basic

trimless

090-7L443F0B21 090-7L40100



Project / Type
Notes
Count / Date



General

Ceiling , Recessed
black reflector
IP20
1300 lm

LED

2700 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 101 , R _r : 91 , R ₍₁₋₅₎ : 89
MR 0.56
MDER 0.51

Optical

flood square
beam angle 56°
UGR < 19 , ≥65° <3000 cd/m ²
PstLM ≤ 1.0 ¹
SVM ≤ 0.4 ¹

Electrical

DALI-2
220-240 V
system 13.1 W
system 99 lm/W ²
PC2


Physical

trimless
length 160 mm
width 47 mm
height 51 mm
0.54 kg


Cutout

length 165 mm
width 50 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

Light distribution



Product drawing

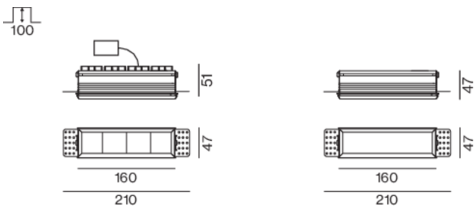

¹ Value of containing product at full load (undimmed)
² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions



Lighting calculator

