

UNICO L3 basic

trim

090-7L353E0B21 090-7L3020W



Project / Type

Notes

Count / Date



General

Ceiling , Recessed
black reflector , RAL 9016 ¹
Mounting set traffic white
IP20
832 lm

LED

3000 K
CRI \geq 90
L90 / 50000 h
initial MacAdam \leq 3 SDCM
R_g: 100 , R_f: 92 , R_{f(1-15)}: 91
MR 0.64
MDER 0.58

Optical

medium square
beam angle 32°
UGR \leq 10 , \geq 65° <3000 cd/m²
PstLM \leq 1.0 ²
SVM \leq 0.4 ²

Electrical

DALI-2
220-240 V
system 9.8 W
system 85 lm/W³
PC2

Physical

trim
length 138 mm
width 63 mm
height 51 mm
0.38 kg

Cutout

length 130 mm
width 50 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 110 mm

¹ RAL code ² Value of containing product at full load (undimmed)

³ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions




Lighting calculator




Rectangular recessed multi-downlight made of die-cast aluminium; installation without tools in mounting set due to patented ball catch system; rectangular installation housing; with trim traffic white; suitable for ceiling thickness of 2-25 mm; equipped with three medium square light elements; symmetrical light distribution with precise radiation characteristic, beam angle 32°; high quality reflector with micro-faceted, aluminum-vaporised surface; black reflector; UGR \leq 10; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° \leq 3000 cd/m²; passive cooling of the LEDs through improved heat sink geometry; light colour 3000 K; binning initial MacAdam \leq 3 SDCM; CRI \geq 90; min. 90% of luminous flux after 50000 operating hours; energy-efficient high power LEDs with very good colour rendering; degree of protection IP20; PC2; 220-240 V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source not replaceable; control gear replaceable by an authorized professional; clank-free;

Light distribution



Product drawing

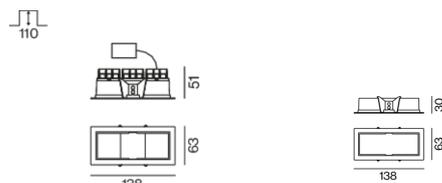

[090-7L353E0B21 090-7L3020W] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

09.04.2025

1 / 1