

# UNICO L4basic

trimless

090-7L441C0021 090-7L40100



Project / Type
Notes
Count / Date



## General

Ceiling , Recessed
chrome reflector
IP20
1280 lm

## LED

2700 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R <sub>g</sub> : 101 , R <sub>r</sub> : 91 , R <sub>(1-5)</sub> : 89
MR 0.56
MDER 0.51

## Optical

flood round
beam angle 49°
UGR < 16 , ≥65° <3000 cd/m <sup>2</sup>
PstLM ≤ 1.0 <sup>1</sup>
SVM ≤ 0.4 <sup>1</sup>

## Electrical

non DIM
220-240 V
system 13.1 W
system 98 lm/W <sup>2</sup>
PC2


## Physical

trimless
length 160 mm
width 47 mm
height 51 mm
0.54 kg


## Cutout

length 165 mm
width 50 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

## Light distribution



## Product drawing

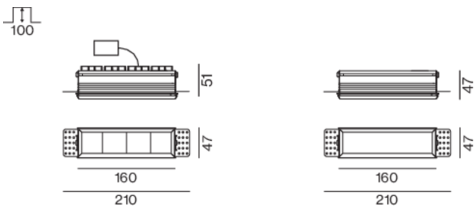

<sup>1</sup> Value of containing product at full load (undimmed)  
<sup>2</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

## Installation instructions



## Lighting calculator

