

# UNICO L4 basic

trim

090-7L451W0022 090-7L4020B



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed

chrome reflector , RAL9005 <sup>1</sup>

Mounting set jet black

IP20

1250 lm

## LED

3000 K

CRI  $\geq$  90

L90 / 50000 h

initial MacAdam  $\leq$  3 SDCM

R<sub>g</sub>: 100 , R<sub>f</sub>: 92 , R<sub>f(-15)</sub>: 91

MR 0.64

MDER 0.58

## Optical

wallwasher floor

P<sub>stLM</sub>  $\leq$  1.0 <sup>2</sup>

SVM  $\leq$  0.4 <sup>2</sup>

## Electrical

non DIM

13.1 W

PC2

95 lm/W

## Physical

trim

length 156 mm

width 43 mm

height 48 mm

0.45 kg

## Cutout

length 165 mm

width 50 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 100 mm


<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

Rectangular recessed multi-downlight made of die-cast aluminium; installation without tools in mounting set due to patented ball catch system; rectangular installation housing; with trim jet black; suitable for ceiling thickness of 2-25 mm; equipped with four wallwasher floor light elements; asymmetrical light distribution with precise radiation characteristic; high quality reflector with micro-faceted, aluminum-vaporised surface; chrome reflector; passive cooling of the LEDs through improved heat sink geometry; light colour 3000 K; binning initial MacAdam  $\leq$  3 SDCM; CRI  $\geq$  90; min. 90% of luminous flux after 50000 operating hours; energy-efficient high power LEDs with very good colour rendering; degree of protection IP20; PC2; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source not replaceable; control gear replaceable by an authorized professional; clank-free;

## Light distribution



## Product drawing

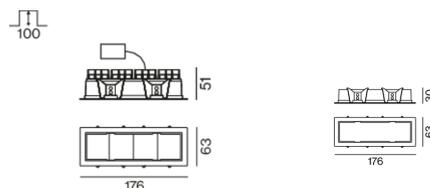

## Installation instructions



## Lighting calculator



[090-7L451W0022 090-7L4020B] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

27.09.2024

1 / 1