

UNICO L3 basic

trim

090-7L363F0021 090-7L3020B



Project / Type	
Notes	
Count / Date	



General

Ceiling , Recessed
chrome reflector , RAL 9005 ¹
Mounting set jet black
IP20
1060 lm

LED

4000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 102 , R _f : 93 , R _{f(1-15)} : 92
MR 0.81
MDER 0.74

Optical

flood square
beam angle 56°
UGR < 19 , ≥ 65° < 3000 cd/m ²
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical

DALI-2
220-240 V
system 9.8 W
system 108 lm/W ³
PC2


Physical

trim
length 138 mm
width 63 mm
height 51 mm
0.38 kg


Cutout

length 130 mm
width 50 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 110 mm

Light distribution



Product drawing

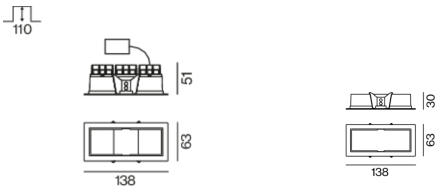

¹ RAL code ² Value of containing product at full load (undimmed)
³ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions



Lighting calculator

