

UNICO L2 basic

trimless

090-7L251C0021 090-7L20100



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

chrome reflector

IP20

680 lm

LED

3000 K

CRI \geq 90

L90 / 50000 h

initial MacAdam \leq 3 SDCM

R_g: 100 , R_f: 92 , R₍₁₋₁₅₎: 91

MR 0.64

MDER 0.58

Optical

flood round

beam angle 49°

UGR $<$ 16 , \geq 65° $<$ 3000 cd/m²

PstLM \leq 1.0¹

SVM \leq 0.4¹

Electrical

non DIM

220-240 V

system 7.3 W

system 93 lm/W²

PC2

Physical

trimless

length 85 mm

width 47 mm

height 51 mm

0.39 kg

Cutout

length 90 mm

width 50 mm

min. ceiling thickness 12.5 mm


max. ceiling thickness 25 mm

recessed depth 120 mm


¹ Value of containing product at full load (undimmed)

² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Light distribution



Product drawing

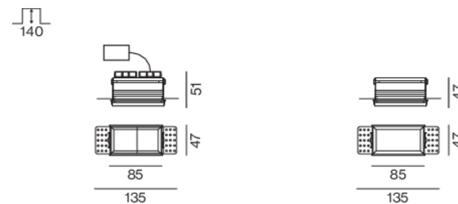

Installation instructions



Lighting calculator



[090-7L251C0021 090-7L20100] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

04.04.2025

1 / 1