

UNICO wall 2 lamps

trim


090-6L263UB001 090-7Q4020B



Project / Type _____

Notes _____

Count / Date _____

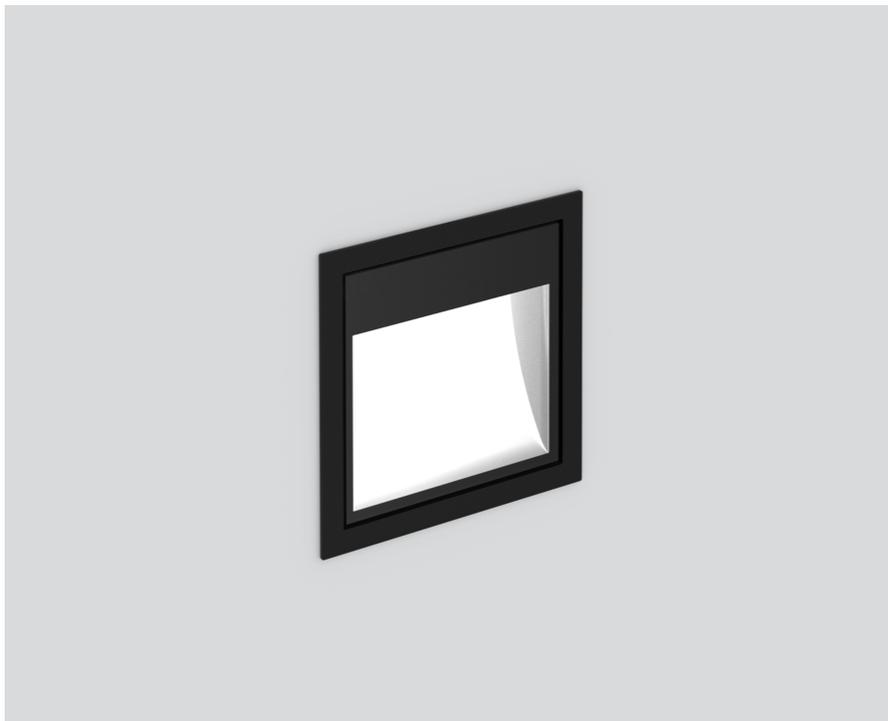

General

Wall , Recessed
black , RAL9005 ¹
jet black
IP20
1070 lm

LED

4000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 3 SDCM
R_g: 102 , R_f: 93 , R_{f(1-15)}: 92
MR 0.81
MDER 0.74

Optical

asymmetric
beam angle 148°
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical

DALI-2
system 17.3 W
PC2
system 62 lm/W³

Physical

trim
length 80 mm
width 53 mm
height 80 mm
0.08 kg

Cutout

length 90 mm
width 90 mm
recessed depth 110 mm


¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)

Installation instructions



Square wall recessed luminaire made from aluminium; surface black; installation without tools in mounting set due to patented ball catch system; square installation housing; with trim jet black; suitable for wall thickness of 2-25 mm; incl. external converter; high quality reflector with micro-faceted, aluminum-vaporised surface; asymmetrical light distribution with precise radiation characteristic; installation optionally for floor or ceiling illumination; passive cooling of the LEDs through improved heat sink geometry; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy-efficient high power LEDs with very good colour rendering; degree of protection IP20; PC2; incl. DALI-2 converter; light source not replaceable; control gear replaceable by an authorized professional;

Light distribution



Product drawing

