


UNICO wall 2 lamps

trim

090-6L241UB001 090-7Q4020W



| | |
|----------------|--|
| Project / Type | |
| Notes | |
| Count / Date | |

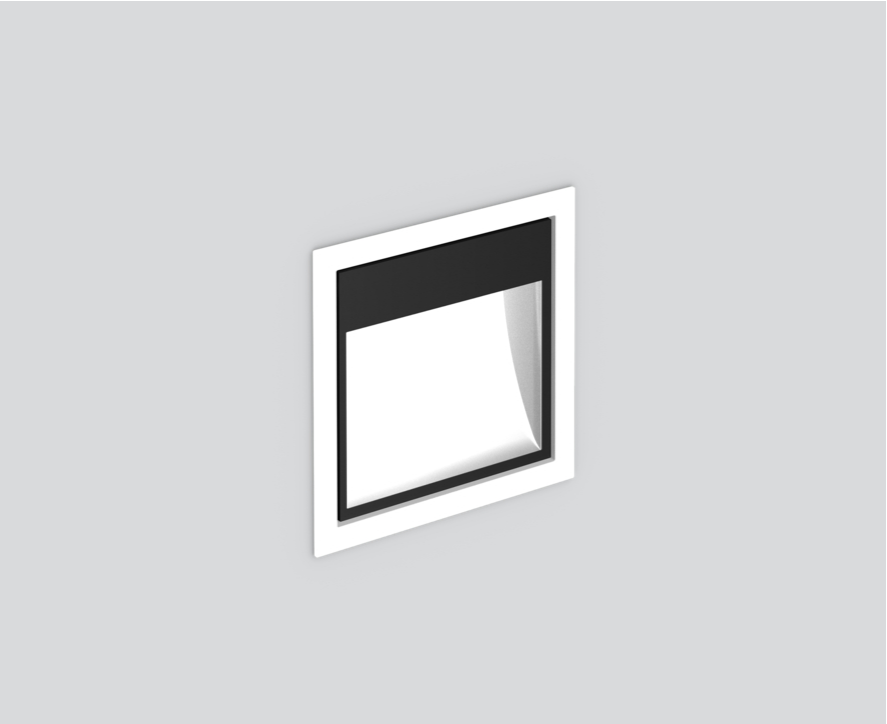

General

| |
|------------------------------|
| Wall , Recessed |
| black , RAL9005 ¹ |
| traffic white |
| IP20 |
| 934 lm |

LED

| |
|--|
| 2700 K |
| CRI ≥ 90 |
| L80 / 50000 h |
| initial MacAdam ≤ 3 SDCM |
| R _g : 101 , R _f : 91 , R _{f(1-15)} : 89 |
| MR 0.56 |
| MDER 0.51 |

Optical

| |
|--------------------------|
| asymmetric |
| beam angle 148° |
| PstLM ≤ 1.0 ² |
| SVM ≤ 0.4 ² |

Electrical

| |
|-----------------------------|
| non DIM |
| system 17.3 W |
| PC2 |
| system 54 lm/W ³ |

Physical

| |
|--------------|
| trim |
| length 80 mm |
| width 53 mm |
| height 80 mm |
| 0.43 kg |

Cutout

| |
|-----------------------|
| length 90 mm |
| width 90 mm |
| recessed depth 110 mm |


¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)

Installation instructions



Square wall recessed luminaire made from aluminium; surface black; installation without tools in mounting set due to patented ball catch system; square installation housing; with trim traffic white; suitable for wall thickness of 2-25 mm; incl. external converter; high quality reflector with micro-faceted, aluminum-vaporised surface; asymmetrical light distribution with precise radiation characteristic; installation optionally for floor or ceiling illumination; passive cooling of the LEDs through improved heat sink geometry; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy-efficient high power LEDs with very good colour rendering; degree of protection IP20; PC2; incl. converter, non dimmable; light source not replaceable; control gear replaceable by an authorized professional;

Light distribution



Product drawing

