


# UNICO Q1basic

ceiling

090-1Q161K9001



Project / Type	
Notes	
Count / Date	

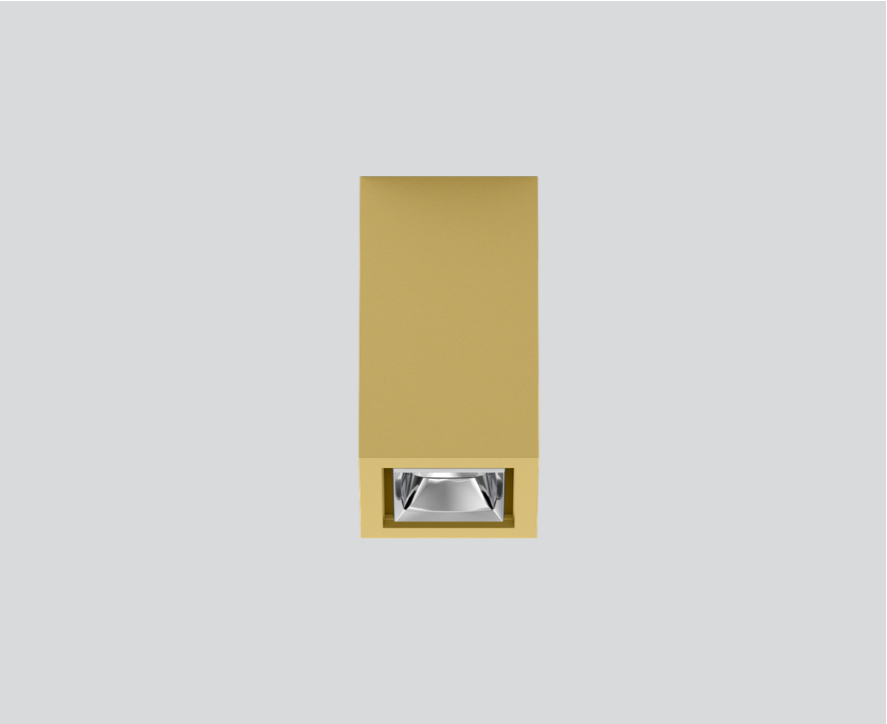

## General

Ceiling , Surface	
gold , RAL 260-M <sup>1</sup>	
Reflector chrome	
IP20	
314 lm	

## LED

4000 K	
CRI ≥ 90	
L90 / 50000 h	
initial MacAdam ≤ 3 SDCM	
R <sub>g</sub> : 102 , R <sub>f</sub> : 93 , R <sub>f(1-15)</sub> : 92	
MR 0.81	
MDER 0.74	

## Optical

spot round	
beam angle 15°	
UGR ≤ 10 , ≥65° <1500 cd/m <sup>2</sup>	
PstLM ≤ 1.0 <sup>2</sup>	
SVM ≤ 0.4 <sup>2</sup>	


## Electrical

non DIM	
220-240 V	
system 5.7 W	
system 55 lm/W <sup>3</sup>	
PC1	


## Physical

length 51 mm	
width 51 mm	
height 90 mm	
0.2 kg	

## Light distribution



## Product drawing



<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

## Installation instructions



## Lighting calculator

