


# UNICO Q4basic

ceiling

090-1Q443BBB01



Project / Type	
Notes	
Count / Date	

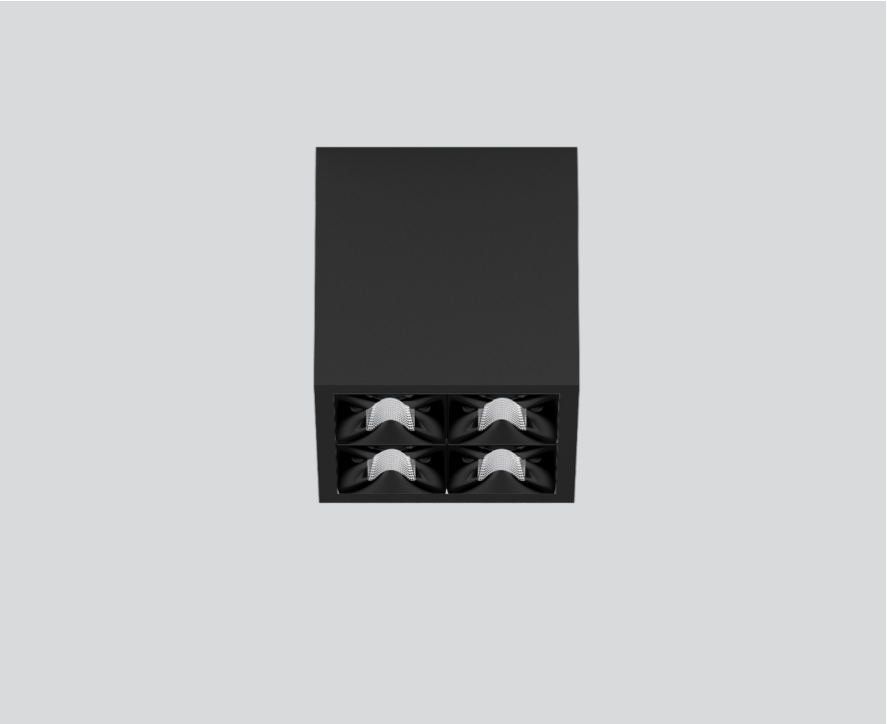

## General

Ceiling , Surface	
black , RAL 9005 <sup>1</sup>	
Reflector black	
IP20	
1500 lm	

## LED

2700 K	
CRI ≥ 90	
L90 / 50000 h	
initial MacAdam ≤ 3 SDCM	
R <sub>g</sub> : 101 , R <sub>f</sub> : 91 , R <sub>t(1-15)</sub> : 89	
MR 0.56	
MDER 0.51	

## Optical

medium round	
beam angle 33°	
UGR ≤ 10	
PstLM ≤ 1.0 <sup>2</sup>	
SVM ≤ 0.4 <sup>2</sup>	

## Electrical


DALI-2	
220-240 V	
system 19.3 W	
system 78 lm/W <sup>3</sup>	
PC1	

## Physical


length 88 mm	
width 88 mm	
height 90 mm	
0.5 kg	

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

## Light distribution



## Product drawing



## Installation instructions



## Lighting calculator

