


UNICO L4basic

ceiling

090-1L463BWB01



| | |
|----------------|--|
| Project / Type | |
| Notes | |
| Count / Date | |

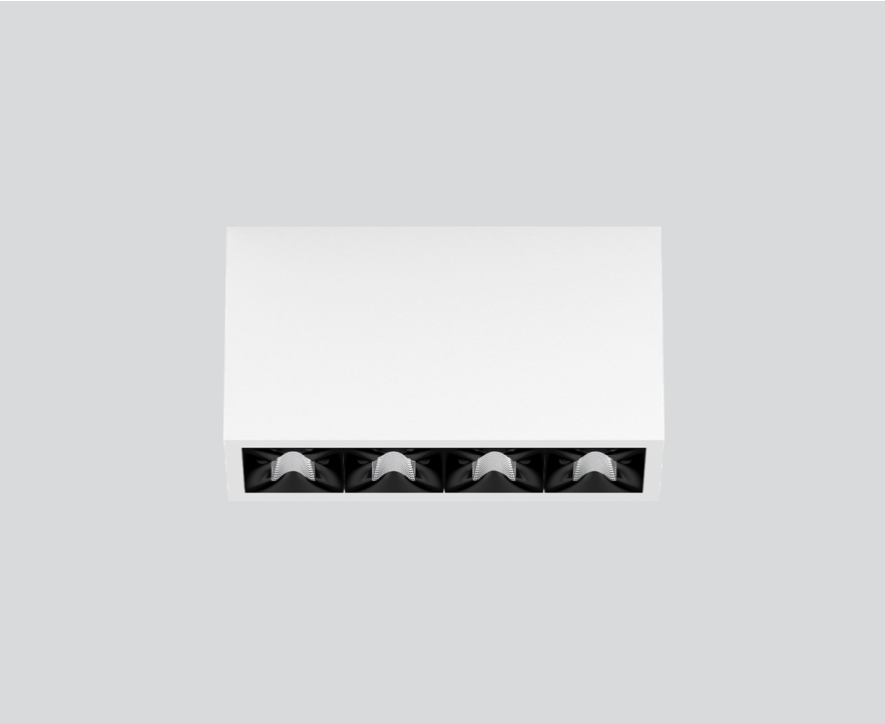

General

| | |
|-------------------------------|--|
| Ceiling , Surface | |
| white , RAL 9016 ¹ | |
| Reflector black | |
| IP20 | |
| 1710 lm | |

LED

| | |
|---|--|
| 4000 K | |
| CRI ≥ 90 | |
| L90 / 50000 h | |
| initial MacAdam ≤ 3 SDCM | |
| R _g : 102 , R _f : 93 , R _{f(1-5)} : 92 | |
| MR 0.81 | |
| MDER 0.74 | |

Optical

| | |
|--------------------------|--|
| medium round | |
| beam angle 33° | |
| UGR < 10 | |
| PstLM ≤ 1.0 ² | |
| SVM ≤ 0.4 ² | |


Electrical

| | |
|-----------------------------|--|
| DALI-2 | |
| 220-240 V | |
| system 19.3 W | |
| system 89 lm/W ³ | |
| PC1 | |


Physical

| | |
|---------------|--|
| length 164 mm | |
| width 51 mm | |
| height 90 mm | |
| 0.55 kg | |

Light distribution



Product drawing



¹ RAL code ² Value of containing product at full load (undimmed)
³ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions



Lighting calculator

