UNICO L3 basic

ceiling

090-1L353EWB01

Project / Type

Notes

Count / Date

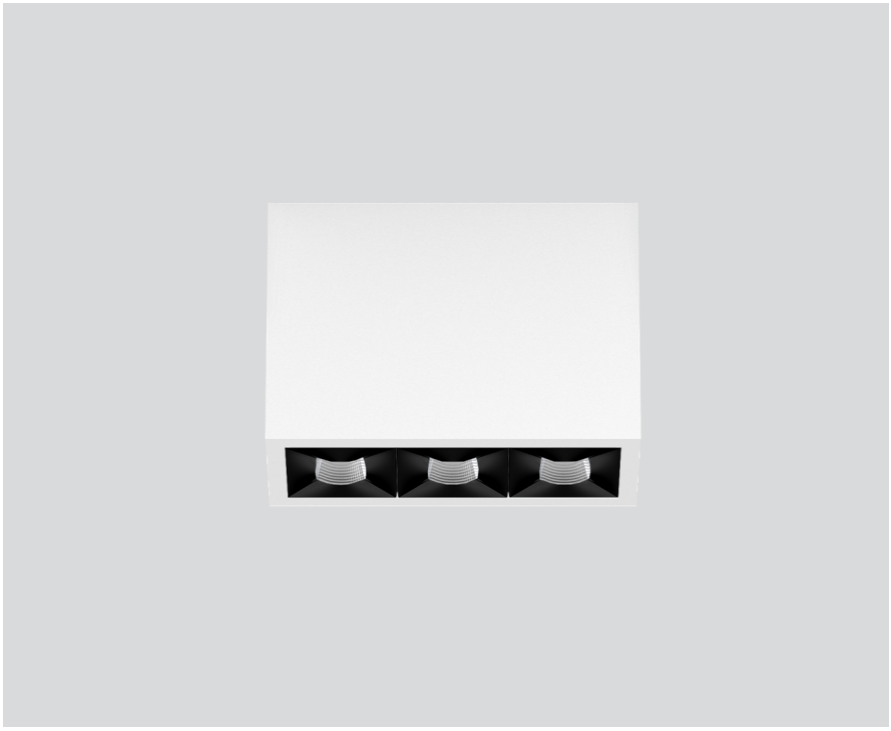

Rectangular surface mounted multi-downlight made of aluminium; luminaire housing can be attached to mounting plate without tools by interlock; converter integrated into luminaire housing; surface white powder coated; equipped with three medium square light elements; symmetrical light distribution with precise radiation characteristic, beam angle 32°; high quality reflector with micro-faceted, aluminum-vaporised surface; Reflector black; UGR ≤ 10; passive cooling of the LEDs through improved heat sink geometry; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy-efficient high power LEDs with very good colour rendering; degree of protection IP20; PC1; 220-240 V; incl. DALI-2 converter; light source not replaceable; control gear replaceable by an authorized professional; clank-free;

Light distribution



Product drawing



General

Ceiling , Surface
white , RAL 9016 [1]
Reflector black
IP20
1410 lm

LED

3000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R_g: 100 , R_f: 92 , $R_{f1\text{-}15}$: 91
MR 0.64
MDER 0.58

Optical

medium square
beam angle 32°
UGR ≤ 10
PstLM ≤ 1.0 [2]
SVM ≤ 0.4 [2]

Electrical

DALI-2
220-240 V
system 17.9 W
system 79 lm/W[3]
PC1

Physical

length 126 mm
width 51 mm
height 90 mm
0.45 kg

[1] RAL code [2] Value of containing product at full load (undimmed)
[3] incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions

Lighting calculator

['090-1L353EWB01'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com