


# UNICO L2 basic

ceiling

090-1L243KB001



Project / Type
Notes
Count / Date

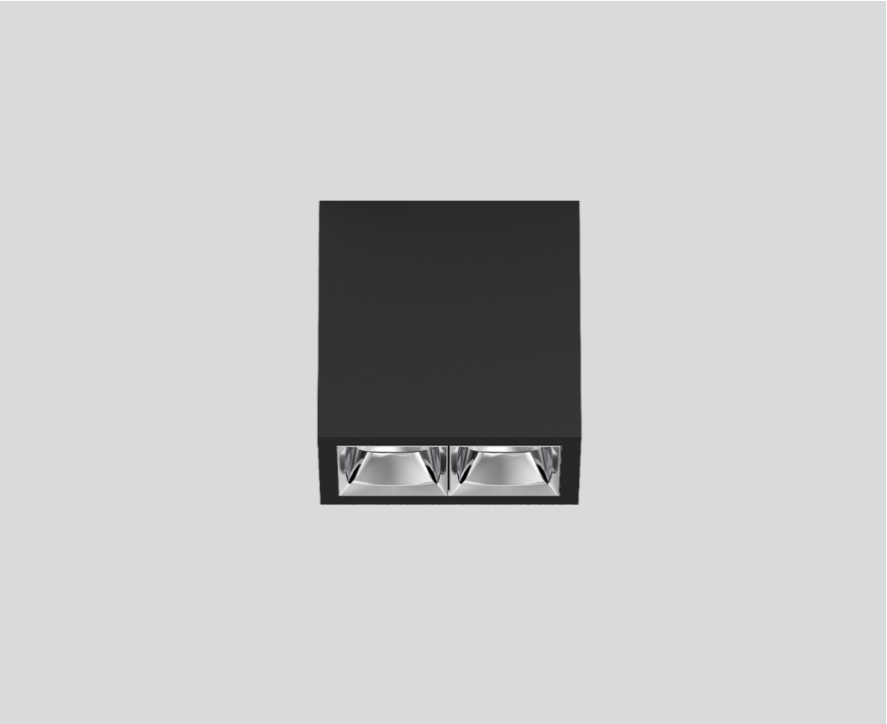

## General

Ceiling , Surface
black , RAL 9005 <sup>1</sup>
Reflector chrome
IP20
662 lm

## LED

2700 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R <sub>g</sub> : 101 , R <sub>f</sub> : 91 , R <sub>t(1-15)</sub> : 89
MR 0.56
MDER 0.51

## Optical

spot round
beam angle 15°
UGR < 10 , ≥65° <1500 cd/m <sup>2</sup>
PstLM ≤ 1.0 <sup>2</sup>
SVM ≤ 0.4 <sup>2</sup>


## Electrical

DALI-2
220-240 V
system 12.6 W
system 53 lm/W <sup>3</sup>
PC1


## Physical

length 88 mm
width 51 mm
height 90 mm
0.35 kg

## Light distribution



## Product drawing



<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

## Installation instructions



## Lighting calculator

