


UNICO L3basic

ceiling

090-1L343B9B01



Project / Type	
Notes	
Count / Date	

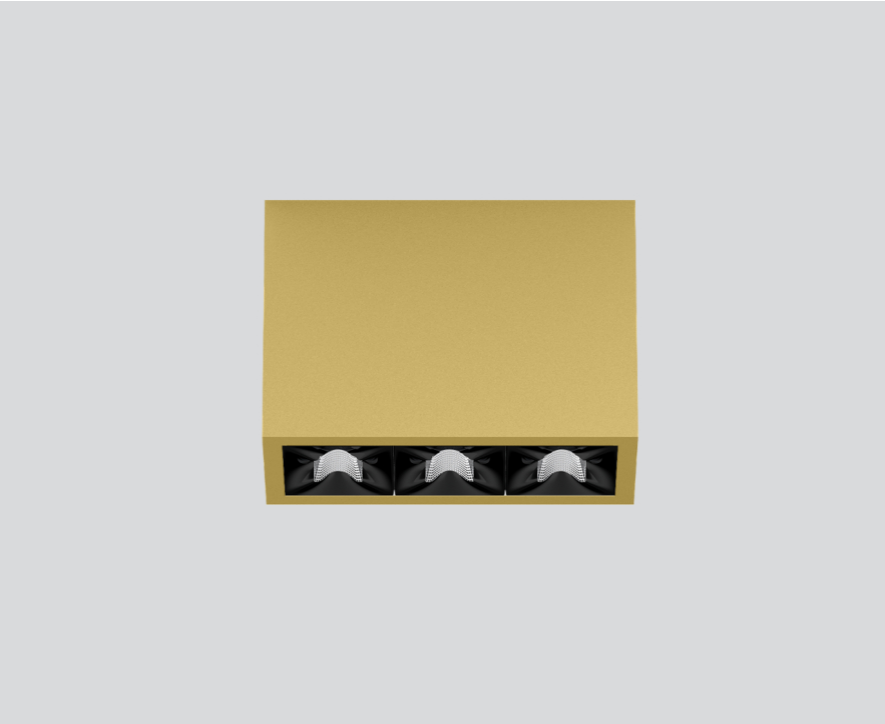

General

Ceiling , Surface	
gold , RAL 260-M ¹	
Reflector black	
IP20	
1350 lm	

LED

2700 K	
CRI ≥ 90	
L90 / 50000 h	
initial MacAdam ≤ 3 SDCM	
R _g : 101 , R _f : 91 , R _{f(1-15)} : 89	
MR 0.56	
MDER 0.51	

Optical

medium round	
beam angle 33°	
UGR ≤ 10	
PstLM ≤ 1.0 ²	
SVM ≤ 0.4 ²	

Rectangular surface mounted multi-downlight made of aluminium; luminaire housing can be attached to mounting plate without tools by interlock; converter integrated into luminaire housing; surface gold powder coated; equipped with three medium round light elements; symmetrical light distribution with precise radiation characteristic, beam angle 33°; high quality reflector with micro-faceted, aluminum-vaporised surface; Reflector black; UGR ≤ 10; passive cooling of the LEDs through improved heat sink geometry; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy-efficient high power LEDs with very good colour rendering; degree of protection IP20; PC1; 220-240 V; incl. DALI-2 converter; light source not replaceable; control gear replaceable by an authorized professional; clank-free;


Electrical

DALI-2	
220-240 V	
system 17.9 W	
system 75 lm/W ³	
PC1	

Physical

length 126 mm	
width 51 mm	
height 90 mm	
0.45 kg	

Light distribution



Product drawing



¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



Lighting calculator

