


# UNICO L2basic

ceiling

090-1L251DBB01



Project / Type
Notes
Count / Date

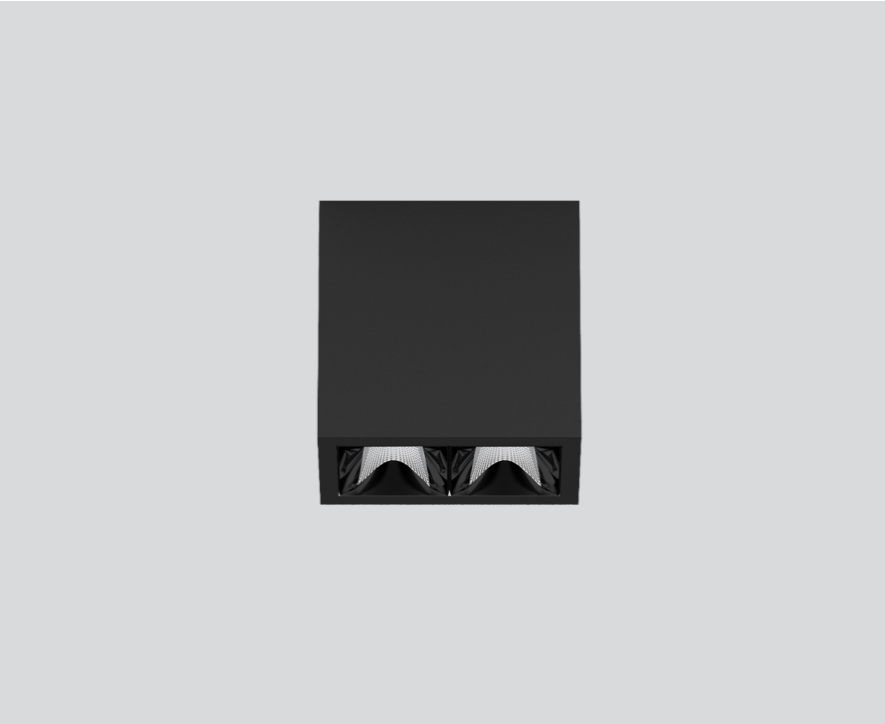

## General

Ceiling , Surface
black , RAL 9005 <sup>1</sup>
Reflector black
IP20
1090 lm

## LED

3000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R <sub>g</sub> : 100 , R <sub>f</sub> : 92 , R <sub>f(1-15)</sub> : 91
MR 0.64
MDER 0.58

## Optical

wide flood round
beam angle 72°
≥65° <3000 cd/m <sup>2</sup>
PstLM ≤ 1.0 <sup>2</sup>
SVM ≤ 0.4 <sup>2</sup>


## Electrical

non DIM
220-240 V
system 12.6 W
system 87 lm/W <sup>3</sup>
PC1


## Physical

length 88 mm
width 51 mm
height 90 mm
0.35 kg

## Light distribution



## Product drawing



<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

## Installation instructions



## Lighting calculator

