

# UNICO L2basic

ceiling


090-1L251C9B01



Project / Type

Notes

Count / Date

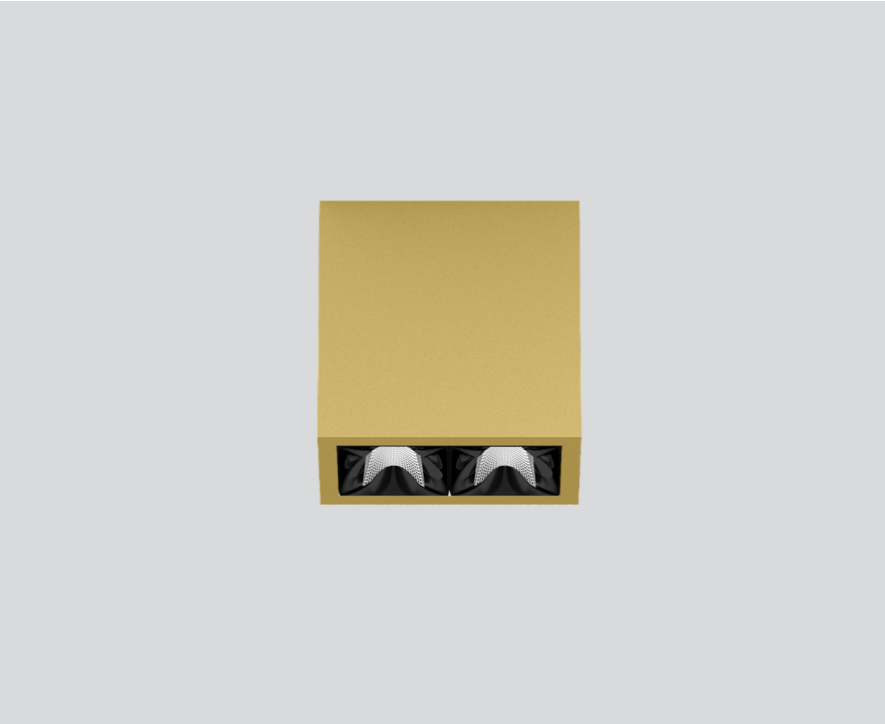

### General

Ceiling , Surface

gold , RAL 260-M <sup>1</sup>

Reflector black

IP20

1100 lm

### LED

3000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 100 , R<sub>f</sub>: 92 , R<sub>f(1-15)</sub>: 91

MR 0.64

MDER 0.58

### Optical

flood round

beam angle 49°

UGR ≤ 19

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

### Electrical

non DIM

220-240 V

system 12.6 W

system 87 lm/W<sup>3</sup>

PC1

### Physical


length 88 mm

width 51 mm

height 90 mm

0.35 kg

### Light distribution



### Product drawing



### Installation instructions



### Lighting calculator



[‘090-1L251C9B01’] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.  
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com