

SETA linear direct / indirect power

suspended system


074-5039577R



Project / Type _____

Notes _____

Count / Date _____

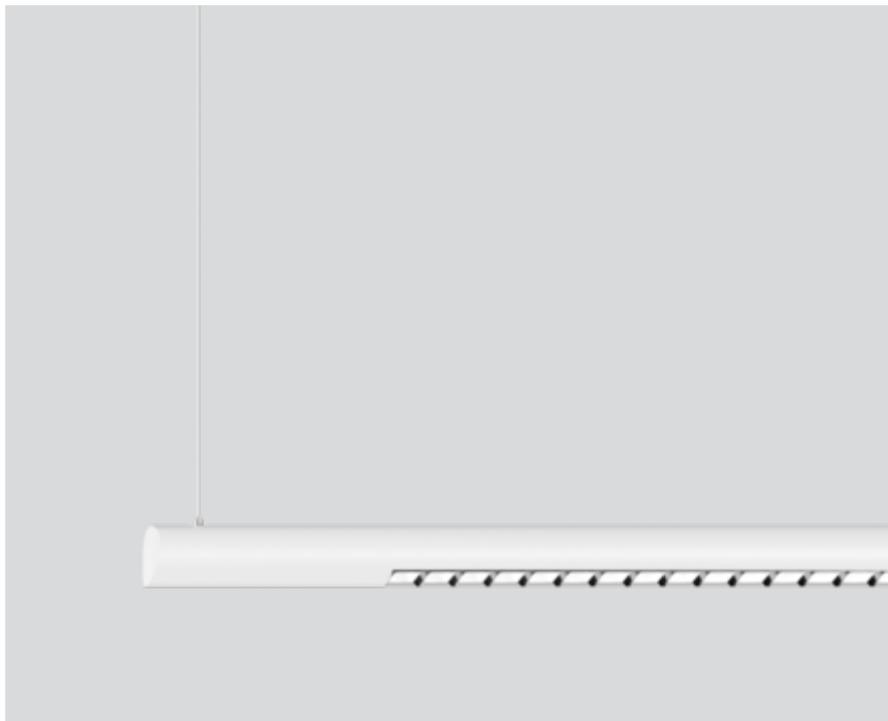

General

Ceiling , Suspended _____
 white , RAL 9010 ¹ _____
 Reflector chrome _____
 IP20 _____
 indirect 7330 lm _____
 direct 6350 lm _____
 total 13680 lm _____

LED

3000 K _____
 CRI ≥ 80 _____
 L90 / 50000 h _____
 initial MacAdam ≤ 3 SDCM _____
 MR 0.56 _____
 MDER 0.51 _____

Optical

Reflector _____
 symmetric _____
 UGR < 13 , ≥65° <1500 cd/m² _____
 PstLM ≤ 1.0 ² _____
 SVM ≤ 0.4 ² _____

Electrical


DALI-2 sensor _____
 220-240 V _____
 system 95 W _____
 system 144 lm/W³ _____
 PC1 _____
 3 DALI Addr. _____

Physical


length 3400 mm _____
 width 60 mm _____
 height 60 mm _____

Luminaire housing made of extruded aluminium profile; extremely slim design (only Ø 61 mm) linear; converter integrated into luminaire housing; no visible screws; for lighting systems; surface white powder coated; for suspended mounting (1500 mm cable suspension as an accessory); with integrated toolless suspension height adjustment on the luminaire; spring clip attachment to the luminaire; extruded profile for improved thermal management; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; high gloss reflector with faceted design; Reflector chrome; UGR ≤ 13; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 1500 cd/m²; direct/indirect illumination characteristic; indirect light component with integrated PC boards and high quality lens system for maximum, homogeneous ceiling illumination, separately controllable; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; luminaire with integrated DALI-2 infrared presence and brightness sensor (DALI-2 controller required); automatic light control of luminaire to individually adjustable brightness; variable automatic shutdown; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



¹ RAL code ² Value of containing product at full load (undimmed)
³ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions



Lighting calculator

