

# BETO curve 400 | 180° direct / indirect power

suspended system

074-7132638R



Project / Type

Notes

Count / Date



## General

Ceiling , Suspended

black , RAL 9005 <sup>1</sup>

Reflector chrome

IP20

indirect 4510 lm

direct 3610 lm

total 8120 lm

## LED

4000 K

CRI  $\geq 80$

L90 / 50000 h

initial MacAdam  $\leq 3$  SDCM

MR 0.72

MDER 0.65

## Optical

Reflector

symmetric

UGR  $\leq 16$  ,  $\geq 65^\circ$  <1500 cd/m<sup>2</sup>

PstLM  $\leq 1.0^2$  <sup>3</sup>

SVM  $\leq 0.4^2$  <sup>3</sup>

## Electrical

DALI-2

220-240 V

system 53 W

system 153 lm/W<sup>4</sup>

PC1

2 DALI Addr.

## Physical

length 654 mm

width 807 mm

height 42 mm

centerline radius 400 mm

segment 180°

2.7 kg

<sup>1</sup> RAL code <sup>2</sup> combined


<sup>3</sup> Value of containing product at full load (undimmed)

<sup>4</sup> incl. consideration of optical losses, internal control unit losses  
& operating device efficiency

## Installation instructions




## Lighting calculator

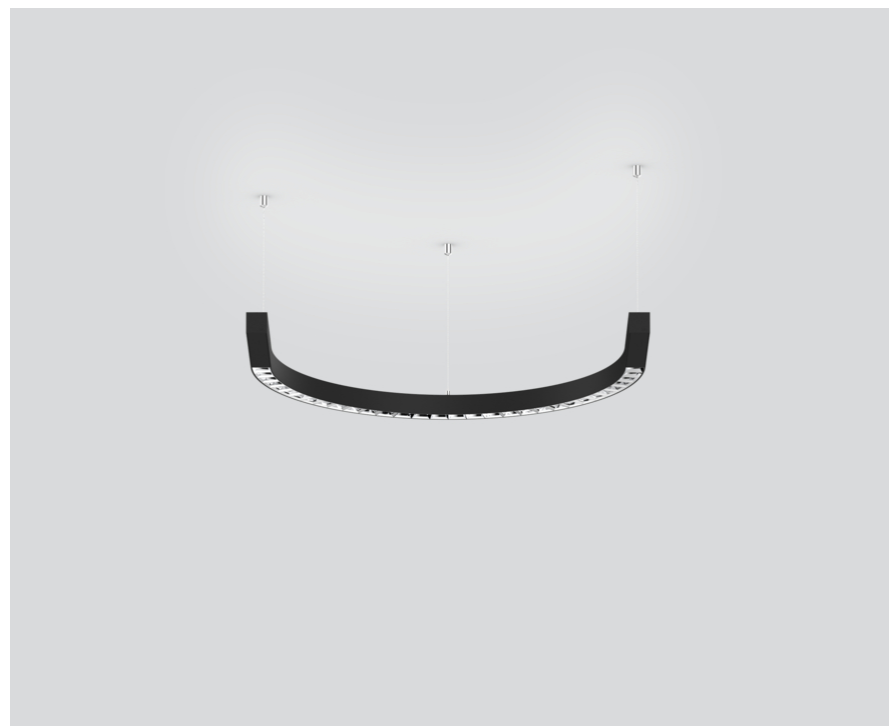

Luminaire housing made of extruded aluminium profile; extremely slim design (only 42 x 42 mm); CURVE segment design 180°; converter integrated into luminaire housing; no visible screws; angular design; for lighting systems; surface black powder coated; for suspended mounting (1500 mm cable suspension as an accessory); with integrated toolless suspension height adjustment on the luminaire; spring clip attachment to the luminaire; extruded profile for improved thermal management; light colour 4000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 80$ ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; high gloss reflector with faceted design; Reflector chrome; UGR  $\leq 16$ ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above  $65^\circ \leq 1500$  cd/m<sup>2</sup>; direct/indirect illumination characteristic; indirect light component with integrated PC boards and high quality lens system for maximum, homogeneous ceiling illumination, separately controllable; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

