

HEX-O MODULE 750

suspended group
073-693610G



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Suspended _____
felt grey _____

Physical

cable 1500 mm (min. 500 mm) _____
length 750 mm _____
width 650 mm _____
height 100 mm _____
4.7 kg _____

Acoustics

Alpha w (α_w) up to 0.9 ¹ _____
SAC (sound absorption class) up to A ¹ _____
NRC up to 0.85 ¹ _____
SAA up to 0.88 ¹ _____


¹ Acoustic data calculations based on HEX-O MODULE 750, cavity 1cm

Installation instructions



Hexagonal acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; high quality visual and tactile surface, felt grey; foreign fiber inclusions possible; pendant fitting with 1500mm cable suspension (1 cable); height adjustment without tools; suitable for group installation; including rear rail for alignment of the housings; can be combined with all HEX-O ceiling and TRIG-O ceiling luminaires and acoustic elements; sound absorbing HEX-O ABSORBER available as an accessory; accessories are listed separately;

Product drawing



HEX-O MODULE 750

suspended group
073-693610G




Project / Type _____
Notes _____
Count / Date _____

Equivalent sound absorption area (A_{eq})

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.17	0.33	0.57	0.6	0.53	0.6

Sound absorption coefficient (a_p)

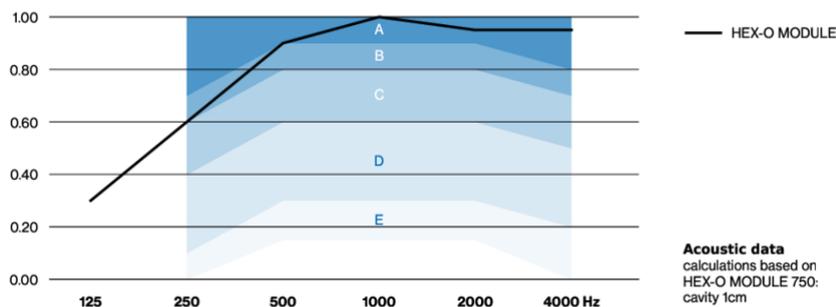

Acoustic accessories

HEX-O ABSORBER 1000

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
marble grey	1000-866-237	073-691740D
felt grey	1000-866-237	073-691740G
black	1000-866-237	073-691740L
white	1000-866-237	073-691740W
acoustic special colours	1000-866-237	073-691740X

