

# HEX-O MODULE 500


suspended group  
073-693510W



Project / Type

Notes

Count / Date

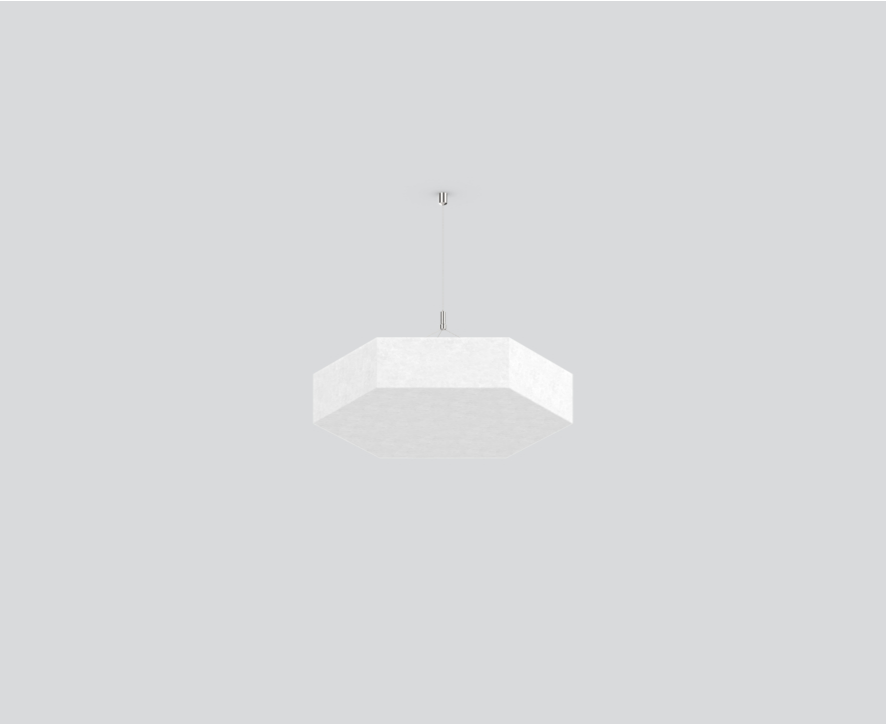

Hexagonal acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; high quality visual and tactile surface, white; foreign fiber inclusions possible; pendant fitting with 1500mm cable suspension (1 cable); height adjustment without tools; suitable for group installation; including rear rail for alignment of the housings; can be combined with all HEX-O ceiling and TRIG-O ceiling luminaires and acoustic elements; sound absorbing HEX-O ABSORBER available as an accessory; accessories are listed separately;

General

Ceiling , Suspended

white

Physical

cable 1500 mm (min. 500 mm)

length 500 mm

width 433 mm

height 100 mm

2.2 kg

Acoustics

Alpha w ( $\alpha_w$ ) up to 0.9 <sup>1</sup>

SAC (sound absorption class) up to A <sup>1</sup>

NRC up to 0.85 <sup>1</sup>


SAA up to 0.88 <sup>1</sup>

<sup>1</sup> Acoustic data calculations based on HEX-O MODULE 750, cavity 1cm

## Installation instructions



## Product drawing



# HEX-O MODULE 500

suspended group  
073-693510W



Project / Type

Notes

Count / Date

## Equivalent sound absorption area ( $A_{eq}$ )

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.09	0.18	0.3	0.32	0.28	0.32

## Sound absorption coefficient ( $\alpha_p$ )



## Acoustic accessories

### HEX-O ABSORBER 750

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
marble grey	750-650-237	073-691640D
felt grey	750-650-237	073-691640G
black	750-650-237	073-691640L
white	750-650-237	073-691640W
acoustic special colours	750-650-237	073-691640X

