


HEX-O MODULE FLAT 1000

suspended single
073-692720D



Project / Type	
Notes	
Count / Date	

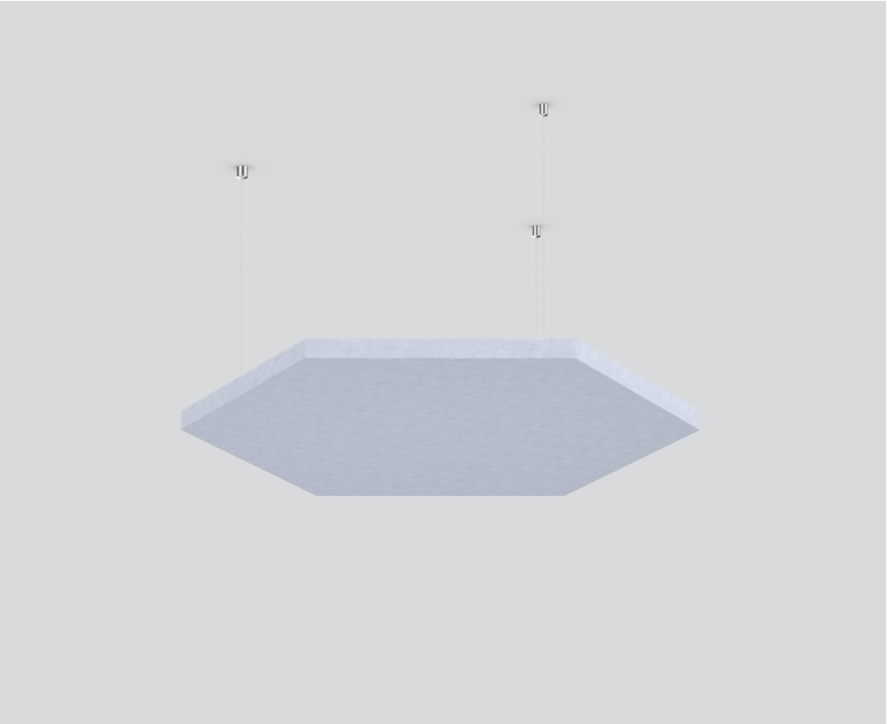

Hexagonal acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of 60% recycled PET; high quality visual and tactile surface, marble grey; foreign fiber inclusions possible; pendant fitting with 1500mm cable suspension (3 cables); height adjustment without tools; suitable for single installation;

General

Ceiling , Suspended	
marble grey	

Physical

cable 1500 mm (min. 500 mm)	
length 1000 mm	
width 866 mm	
height 40 mm	
7.5 kg	

Acoustics


Alpha w (α_w) up to 0.5 ¹	
SAC (sound absorption class) up to D ¹	
NRC up to 0.7 ¹	
SAA up to 0.69 ¹	

¹ Alpha w, SAC, NRC, SAA refer to the best result of the entire product family

Installation instructions



Product drawing



[073-692720D] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

HEX-O MODULE FLAT 1000

suspended single
073-692720D



Project / Type

Notes

Count / Date

Equivalent sound absorption area (A_{eq})

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.06	0.17	0.45	0.67	0.84	0.72

Sound absorption coefficient (α_p)

