

# HEX-O MODULE FLAT 750


suspended single  
073-692620G



Project / Type


Notes

Count / Date

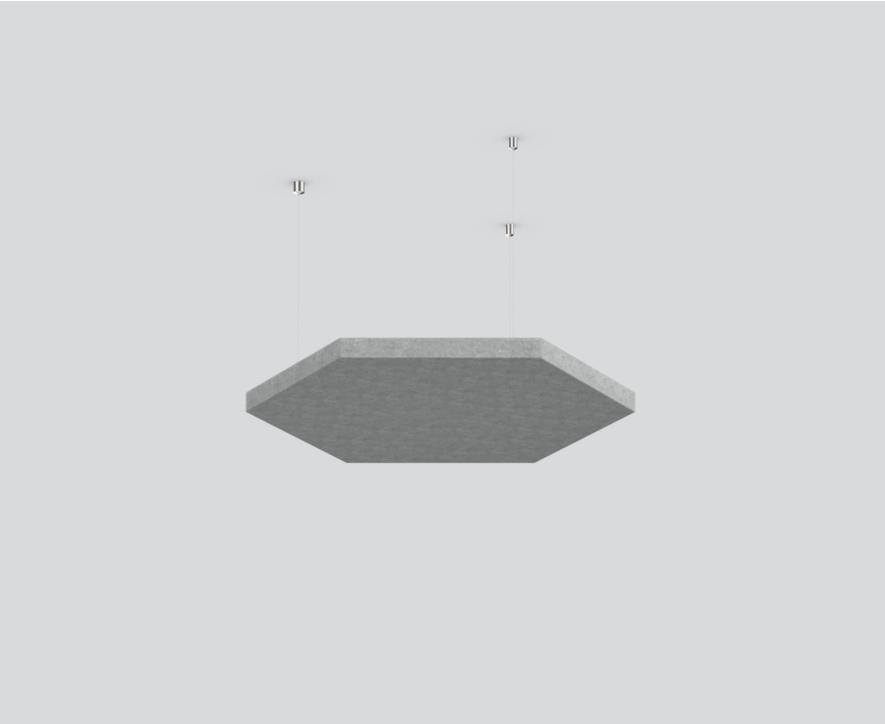

Hexagonal acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of 60% recycled PET; high quality visual and tactile surface, felt grey; foreign fiber inclusions possible; pendant fitting with 1500mm cable suspension (3 cables); height adjustment without tools; suitable for single installation; sound absorbing HEX-O ABSORBER available as an accessory; accessories are listed separately;

## Product drawing



General

Ceiling , Suspended

felt grey

Physical

cable 1500 mm (min. 500 mm)

length 750 mm

width 650 mm

height 40 mm

5.2 kg

Acoustics

Alpha w ( $\alpha_w$ ) up to 0.5 <sup>1</sup>

SAC (sound absorption class) up to D <sup>1</sup>

NRC up to 0.7 <sup>1</sup>

SAA up to 0.69 <sup>1</sup>

<sup>1</sup> Alpha w, SAC, NRC, SAA refer to the best result of the entire product family

## Installation instructions



# HEX-O MODULE FLAT 750

suspended single  
073-692620G



Project / Type


Notes

Count / Date

## Equivalent sound absorption area ( $A_{eq}$ )

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.03	0.1	0.27	0.4	0.5	0.43

## Sound absorption coefficient ( $\alpha_p$ )

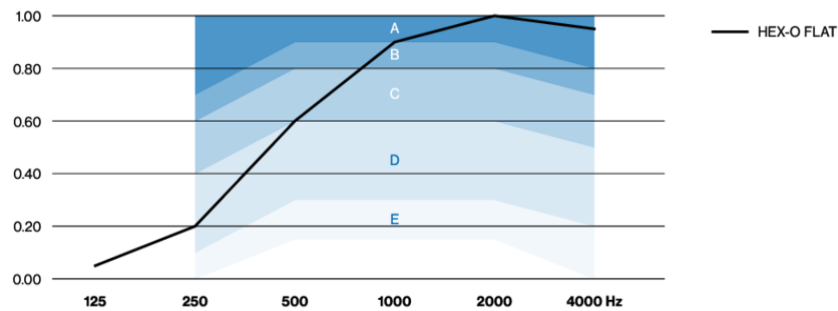

## Acoustic accessories

### HEX-O ABSORBER 1000

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
marble grey	1000-866-237	073-691740D
felt grey	1000-866-237	073-691740G
black	1000-866-237	073-691740L
white	1000-866-237	073-691740W
acoustic special colours	1000-866-237	073-691740X

